


CIRRUS CEILING T1


TUBULAR 1 WITH REMOTE POWER

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 05.29.26

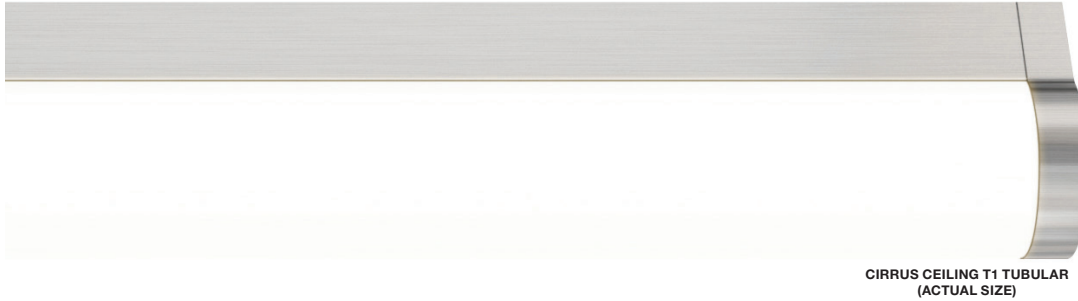

CIRRUS CEILING T1 TUBULAR
(ACTUAL SIZE)

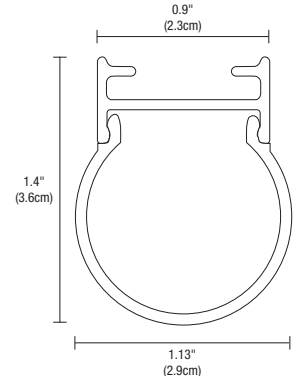

CIRRUS CEILING T1 TUBULAR LENS
(ACTUAL SIZE)

DESCRIPTION

Cirrus Ceiling T1 is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 12" to 480" (40'), a 176° beam spread, and a variety of finishes with Warm Dim. RGBTW TruColor™, Dynamic/Tunable White and RGB options available on other spec sheets. Fixture includes a 5 year pro-rated warranty. For custom designs and quotes, send drawings to design@PureEdgeLighting.com.


Wattages for this fixture are available in the following options:

- 2W - 2.5 Watts per Foot, Lengths up to 480" (40')
- 5W - 4.4 Watts per Foot, Lengths up to 240" (20')
- 7W - 7.3 Watts per Foot, Lengths up to 156" (13')

INSTALLATION

- Mounts to a Standard Junction Box, pre-wired from a 60 Watt Non-IC (50W-IC) Power Supply that fits in the ceiling electrical Junction Box or from a Remote Power Supply up to 100 Watts at a maximum 40' away
- Includes your choice of Canopy: 1" Rectangle Junction Box or 4.6" Square Canopy
- Includes Mounting Clips (every 18")
- Remote Power Supply sold separately

FINISHES

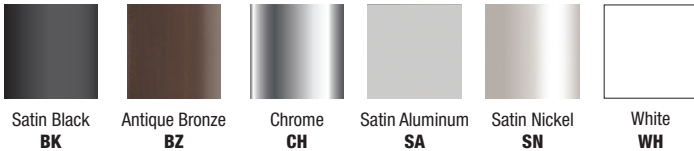

System	Wattage Per Foot	Canopy	Nominal Size	Color Temperature	Finish
CCT1	2W	1R	480	30K	SN
CCT1 Cirrus Ceiling Tubular 1	2W 2.5 Watts (480" max, 40') 5W 4.4 Watts (240" max, 20') 7W 7.3 Watts (156" max, 13')	1R 1" Rectangle Canopy 4S 4.6" Square Split Canopy TBA Clips with 2ft Teflon plenum power feed, use for 15/16" or 9/16" Wide T-Bar Flush mounted ceiling panels TBB Clips with 2ft Teflon plenum power feed, use for 15/16" wide T-Bar with ceiling panel 3/8" below grid TBC Compatible with Armstrong® Optima® PB Vector 15/16" T-Bar systems with 1/4" reveal ceiling panels TBE Clips with 2ft Teflon plenum power feed, use for 9/16" wide Slotted T-Bar TBF Mounting clips are compatible with Donn® Fineline® Slotted T-Bar Drop Ceiling systems with 1/8" openings TBI T-bar clips for Armstrong interlude and 9/16" flat grid with Tegular tiles TBM Magnetic Tape is compatible with flat metal ceilings such as Armstrong® Metalworks™	12-480 Order in various increments from 12" to 480" (Maximum shipping length). Maximum shipping length for Chrome is 84". *See length chart on pg 4 for exact dimensions	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim (5W only) 30K 3000K Warm White 30D 3000K Warm Dim (5W only) 35K 3500K Neutral White 40K 4000K Cool White	BK Satin Black BZ Antique Bronze CH Chrome SA Satin Aluminum SN Satin Nickel WH White

LENSES

Diffused White T1 Tubular Lens 176° Beam Spread

APPLICATIONS

Indoor - Kitchens, Dining Rooms, Hallways, Conference Rooms, Offices, Architectural, General, and Retail

LAMPING

- Warm Dim (optional): 2700K-2000K (**27D**) or 3000K-2000K (**30D**)
- Tunable White (optional): 2000K-6500K
- RGB (optional): Red, Green, and Blue
- 50,000 Hour Lamp Life

REMOTE POWER SUPPLIES*, DIMMERS & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 Wiring

STATIC WHITE

- Pure Smart™ WiZ Pro [Power Supplies](#) & [Smart Controls](#)

STATIC WHITE & WARM DIM

- [UNI Driver: Universal Dimming](#) (ELV, TRIAC, 0-10V)
ELV & TRIAC [Smart Dimmer & Switch](#)

APPROVALS

Class2 Wiring up to 100 watts, Indoor Damp Location, ETL listed, RoHS.

CIRRUS CEILING T1

TUBULAR 1 WITH REMOTE POWER

NOMINAL LAMP DATA: Lamp data Cirrus Ceiling T1



CCT1																	
DESCRIPTION	DIFFUSED TUBULAR 1 LENS																
WATTS PER FOOT	2W (2.5 watts)					5W (4.4 watts)							7W (7.3 watts)				
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D*	30K	30D*	35K	40K	24K	27K	30K	35K	40K
LUMENS PER FOOT (lm/ft)	195	197	205	235	248	360	364	415	379	433	435	459	556	562	586	672	709
LUMENS PER WATT (lm/w)	78	79	82	94	99	82	83	87	86	90	99	104	76	77	80	92	97
CRI	92+	92+	92+	92+	92+	92+	92+	94+	92+	94+	92+	92+	92+	92+	92+	92+	92+

*27D, 30D - Warm Dim (4.8 Watts)


2 Watt, 176° @ 3000K	
Distance	Foot Candles
1'	69
1.5'	46
2'	35
3'	23
4'	16
5'	12
6'	10
7'	8
8'	7

5 Watt, 176° @ 3000K	
Distance	Foot Candles
1'	111
1.5'	75
2'	56
3'	37
4'	27
5'	19
6'	15
7'	12
8'	10

7 Watt, 176° @ 3000K	
Distance	Foot Candles
1'	180
1.5'	120
2'	90
3'	60
4'	43
5'	33
6'	26
7'	21
8'	18

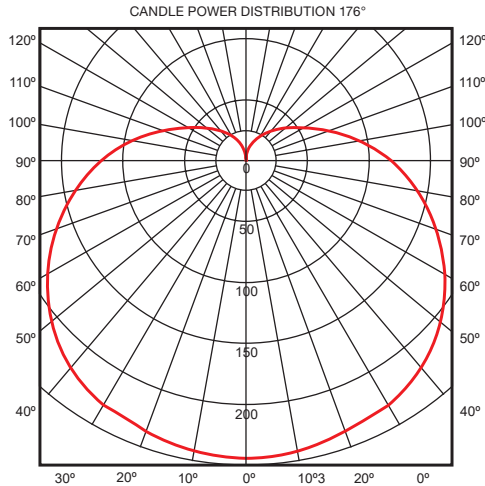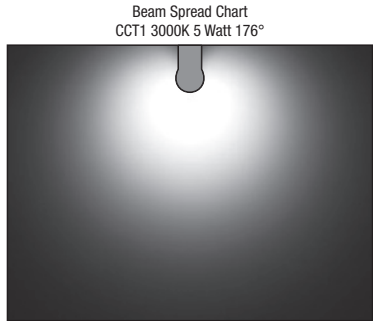


NOMINAL LAMP DATA: Lamp data Cirrus Ceiling T1

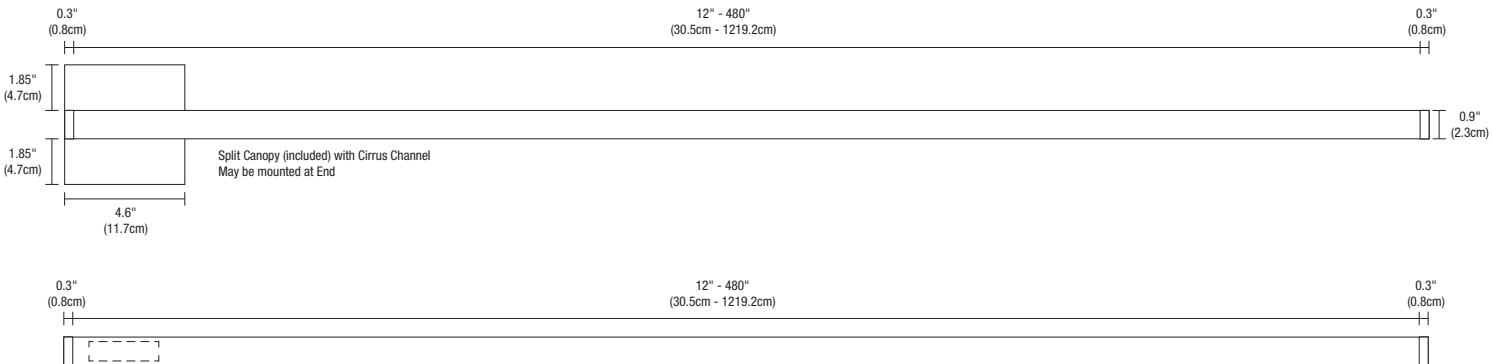

CIRRUS CEILING T1

TUBULAR 1 WITH REMOTE POWER

COMPONENTS J-box, Split Canopies, & Mounting Clips are included and sold separately for replacement

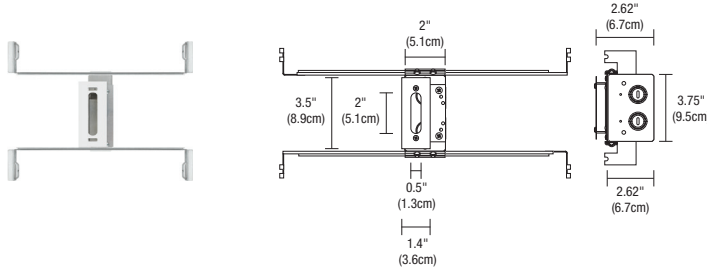


1" RECTANGLE CANOPY & J-BOX

(INCLUDED WITH 1R SELECTED IN FIXTURE ORDERING CODE)

The Slim-Profile Junction Box with Hanger Bars mounts to studs spaced between 14.5" and 25" apart behind drywall. Allows low voltage DC wires from Remote Power Supply to connect to channel wires.

The Junction Box opening is covered by the fixture for a clean, safe connection. Includes a Goof Plate, for poor plastering around J-box.

System	Canopy	Product
C	1RE	JBOX
C Channel	1RE 1" Rectangle	JBOX Junction Box

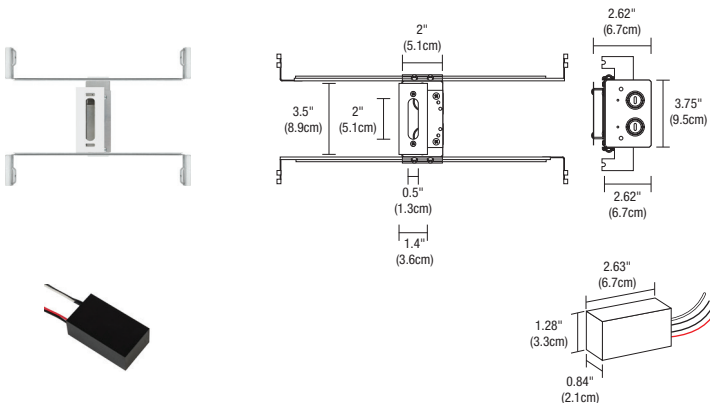


1" RECTANGLE CANOPY & J-BOX WITH 50W POWER SUPPLY

(ORDER SEPARATELY)

The Slim-Profile Junction Box with Hanger Bars mounts to studs spaced between 14.5" and 25" apart behind drywall. Allows low voltage DC wires from included power supply to connect to channel wires.

The Junction Box opening is covered by the fixture for a clean, safe connection. Rated 60 watts for Non-Insulated Ceiling or Wall Power Supply. Rated 50 watts for Insulated Ceiling. Includes a Goof Plate, for poor plastering around J-box.

System	Canopy	Product	Watts	Insulation
CV2	1RE	JBOX	50W	IC
CV2 Channel 24V	1RE 1" Rectangle	JBOX Junction Box	50W 50 Watts	IC Insulated Ceiling

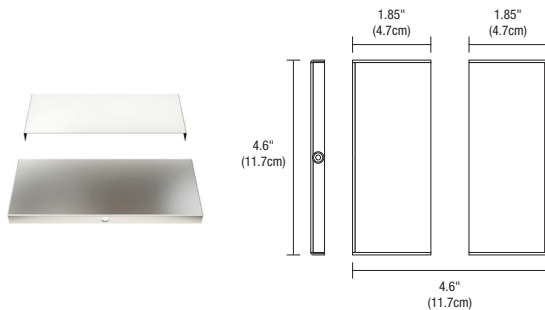

4" SQUARE SPLIT CANOPY

(INCLUDED WITH 4S SELECTED IN FIXTURE ORDERING CODE)

The 4" Square Canopy fits on a standard 4" electrical box with round plaster ring. It fits flush along channel while covering Junction Box. The Canopy may float anywhere along the channel and comes in six finishes.

System	Canopy	Finish
CC	4SQ	SN
CC Cirrus Ceiling	4SQ 4.6" Split Square	BK Satin Black BZ Antique Bronze CH Chrome SB Satin Brass SN Satin Nickel WH White



CIRRUS CEILING T1

TUBULAR 1 WITH REMOTE POWER



PROJECT
FIXTURE TYPE
DATE

REV 05.29.26

LENGTH CHART: Actual lengths for Cirrus Ceiling T1

STATIC WHITE								
Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)	Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)	Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)
12	13.0	13.0	168	169.4	169.4	324	325.8	326.2
15	15.4	15.4	171	171.8	172.2	327	328.2	328.6
17	17.8	17.8	173	174.2	174.6	329	330.6	331.0
20	20.2	20.2	176	176.6	177.0	332	333.0	333.4
22	22.6	22.6	178	179.0	179.4	334	335.4	335.8
24	25.0	25.0	180	181.4	181.8	336	337.8	338.2
27	27.4	27.4	183	183.8	184.2	339	340.2	341.0
29	29.8	29.8	185	186.2	186.6	341	342.6	343.4
32	32.2	32.2	188	188.6	189.0	344	345.0	345.8
34	34.6	34.6	190	191.0	191.4	346	347.4	348.2
36	37.0	37.0	192	193.4	193.8	348	349.8	350.6
39	39.4	39.4	195	195.8	196.2	351	352.2	353.0
41	41.8	41.8	197	198.2	198.6	353	354.6	355.4
44	44.2	44.2	200	200.6	201.0	356	357.0	357.8
46	46.6	46.6	202	203.0	203.4	358	359.4	360.2
48	49.0	49.0	204	205.4	205.8	360	361.8	362.6
51	51.4	51.4	207	207.8	208.2	363	364.6	365.0
53	53.8	53.8	209	210.2	210.6	365	367.0	367.4
56	56.2	56.2	212	212.6	213.0	368	369.4	369.8
58	58.6	58.6	214	215.0	215.4	370	371.8	372.2
60	61.0	61.0	216	217.4	217.8	372	374.2	374.6
63	63.4	63.4	219	219.8	220.2	375	376.6	377.0
65	65.8	65.8	221	222.2	222.6	377	379.0	379.4
68	68.2	68.2	224	224.6	225.0	380	381.4	381.8
70	70.6	70.6	226	227.0	227.4	382	383.8	384.2
72	73.0	73.0	228	229.4	229.8	384	386.2	386.6
75	75.4	75.4	231	231.8	232.2	387	388.6	389.0
77	77.8	77.8	233	234.2	234.6	389	391.0	391.4
80	80.2	80.2	236	236.6	237.0	392	393.4	393.8
82	82.6	82.6	238	239.0	239.4	394	395.8	396.2
84	85.0	85.0	240 (2K6K & RGB max)	241.4	241.8	396	398.2	398.6
87	87.4	87.8	243	244.2	244.2	399	400.6	401.0
89	89.8	90.2	245	246.6	246.6	401	403.0	403.4
92	92.2	92.6	248	249.0	249.0	404	405.4	405.8
94	94.6	95.0	250	251.4	251.4	406	407.8	408.2
96	97.0	97.4	252	253.8	253.8	408	410.2	410.6
99	99.4	99.8	255	256.2	256.6	411	412.6	413.0
101	101.8	102.2	257	258.6	259.0	413	415.0	415.4
104	104.2	104.6	260	261.0	261.4	416	417.4	417.8
106	106.6	107.0	262	263.4	263.8	418	419.8	420.2
108	109.0	109.4	264	265.8	266.2	420	422.2	422.6
111	111.4	111.8	267	268.2	268.6	423	424.6	425.4
113	113.8	114.2	269	270.6	271.0	425	427.0	427.8
116	116.2	116.6	272	273.0	273.4	428	429.4	430.2
118	118.6	119.0	274	275.4	275.8	430	431.8	432.6
120	121.0	121.4	276	277.8	278.2	432	434.2	435.0
123	123.8	123.8	279	280.2	280.6	435	436.6	437.4
125	126.2	126.2	281	282.6	283.0	437	439.0	439.8
128	128.6	128.6	284	285.0	285.4	440	441.4	442.2
130	131.0	131.0	286	287.4	287.8	442	443.8	444.6
132	133.4	133.4	288	289.8	290.2	444	446.2	447.0
135	135.8	135.8	291	292.2	292.6	447	448.6	449.4
137	138.2	138.2	293	294.6	295.0	449	451.0	451.8
140	140.6	140.6	296	297.0	297.4	452	453.4	454.2
142	143.0	143.0	298	299.4	299.8	454	455.8	456.6
144	145.4	145.4	300	301.8	302.2	456	458.2	459.0
147	147.8	147.8	303	304.2	304.6	459	460.6	461.4
149	150.2	150.2	305	306.6	307.0	461	463.0	463.8
152	152.6	152.6	308	309.0	309.4	464	465.4	466.2
154	155.0	155.0	310	311.4	311.8	466	467.8	468.6
156	157.4	157.4	312	313.8	314.2	468	470.2	471.0
159	159.8	159.8	315	316.2	316.6	471	472.6	473.4
161	162.2	162.2	317	318.6	319.0	473	475.0	475.8
164	164.6	164.6	320	321.0	321.4	476	477.4	478.2
166	167.0	167.0	322	323.4	323.8	478	479.8	480.6
						480	482.2	483.0



CIRRUS CEILING T1
TUBULAR 1 WITH REMOTE POWER



PROJECT
FIXTURE TYPE
DATE

REV 05.29.26

LENGTH CHART: Actual lengths for Cirrus Ceiling T1

WARM DIM								
Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)	Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)	Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)
12	13.0	13.0	150	151.4	151.4	288	289.8	290.2
15	16.0	16.0	153	154.4	154.4	291	292.8	293.2
18	19.0	19.0	156	157.4	157.4	294	295.8	296.2
21	22.0	22.0	159	160.4	160.4	297	298.8	299.2
24	25.0	25.0	162	163.4	163.4	300	301.8	302.2
27	28.0	28.0	165	166.4	166.4	303	304.8	305.2
30	31.0	31.0	168	169.4	169.4	306	307.8	308.2
33	34.0	34.0	171	172.4	172.8	309	310.8	311.2
36	37.0	37.0	174	175.4	175.8	312	313.8	314.2
39	40.0	40.0	177	178.4	178.8	315	316.8	317.2
42	43.0	43.0	180	181.4	181.8	318	319.8	320.2
45	46.0	46.0	183	184.4	184.8	321	322.8	323.2
48	49.0	49.0	186	187.4	187.8	324	325.8	326.2
51	52.0	52.0	189	190.4	190.8	327	328.8	329.2
54	55.0	55.0	192	193.4	193.8	330	331.8	332.2
57	58.0	58.0	195	196.4	196.8	333	334.8	335.2
60	61.0	61.0	198	199.4	199.8	336	337.8	338.2
63	64.0	64.0	201	202.4	202.8	339	340.8	341.6
66	67.0	67.0	204	205.4	205.8	342	343.8	344.6
69	70.0	70.0	207	208.4	208.8	345	346.8	347.6
72	73.0	73.0	210	211.4	211.8	348	349.8	350.6
75	76.0	76.0	213	214.4	214.8	351	352.8	353.6
78	79.0	79.0	216	217.4	217.8	354	355.8	356.6
81	82.0	82.0	219	220.4	220.8	357	358.8	359.6
84	85.0	85.0	222	223.4	223.8	360	361.8	362.6
87	88.0	88.4	225	226.4	226.8	363	365.2	365.6
90	91.0	91.4	228	229.4	229.8	366	368.2	368.6
93	94.0	94.4	231	232.4	232.8	369	371.2	371.6
96	97.0	97.4	234	235.4	235.8	372	374.2	374.6
99	100.0	100.4	237	238.4	238.8	375	377.2	377.6
102	103.0	103.4	240	241.4	241.8	378	380.2	380.6
105	106.0	106.4	243	244.8	244.8	381	383.2	383.6
108	109.0	109.4	246	247.8	247.8	384	386.2	386.6
111	112.0	112.4	249	250.8	250.8	387	389.2	389.6
114	115.0	115.4	252	253.8	253.8	390	392.2	392.6
117	118.0	118.4	255	256.8	257.2	393	395.2	395.6
120	121.0	121.4	258	259.8	260.2	396	398.2	398.6
123	124.4	124.4	261	262.8	263.2	399	401.2	401.6
126	127.4	127.4	264	265.8	266.2	402	404.2	404.6
129	130.4	130.4	267	268.8	269.2	405	407.2	407.6
132	133.4	133.4	270	271.8	272.2	408	410.2	410.6
135	136.4	136.4	273	274.8	275.2	411	413.2	413.6
138	139.4	139.4	276	277.8	278.2	414	416.2	416.6
141	142.4	142.4	279	280.8	281.2	417	419.2	419.6
144	145.4	145.4	282	283.8	284.2	420	422.2	422.6
147	148.4	148.4	285	286.8	287.2			


CIRRUS CEILING T1

TUBULAR 1 WITH REMOTE POWER

COMPONENTS J-box, Split Canopies, & Mounting Clips are included and sold separately for replacement

CEILING MOUNTING LOCKING CLIP (INCLUDED)


Ceiling Mounting spring clips are provided with every 2' of Cirrus Ceiling Channel. The Clip snaps into the channel, staying securely fastened to the ceiling or wall.

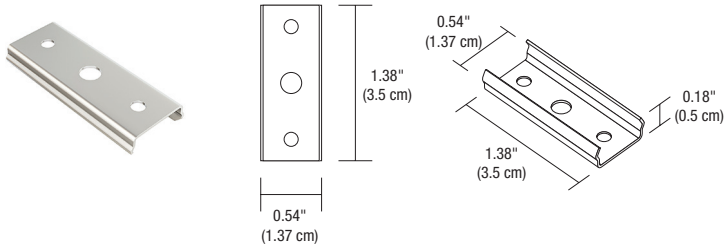

System	Canopy
CC	MCL
CC Cirrus Ceiling	MCL Mounting Clip

CEILING MOUNTING LOCKING CLIP (ORDER SEPARATELY)


Ceiling Mounting Locking Clips may be ordered separately for extra support. The channel slides into the clip and locks in place staying securely fastened to the ceiling or to the wall.

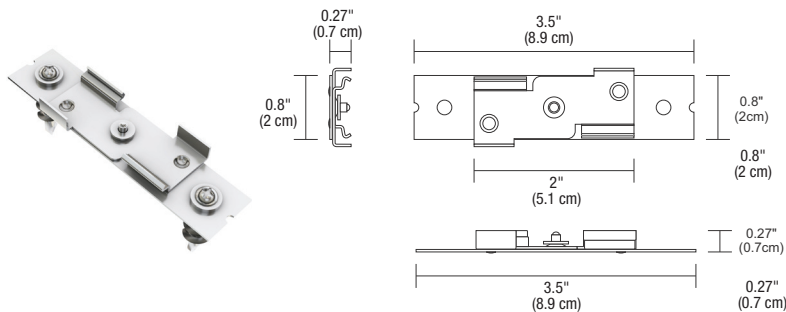

System	Canopy	Type
CC	MCL	L
CC Cirrus Ceiling	MCL Mounting Clip	L Locking

FORK LOCKING CLIP (ORDER SEPARATELY)

Fork locking clip for ceiling or wall Mounting. One locking Spring clip is provided with every Cirrus Channel. The the channel slides into the Fork locking Clip keeping the fixture secure.

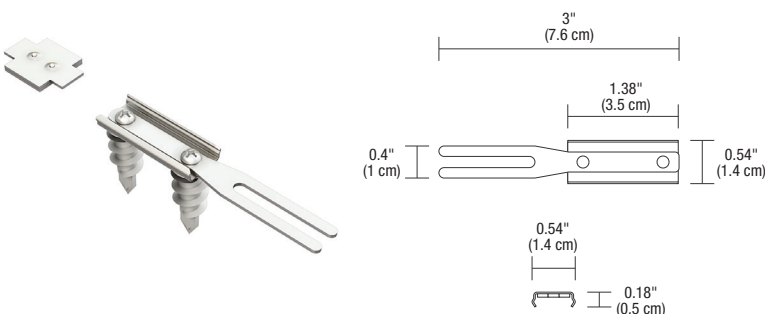




System	Canopy	Type
CC	MCL	FL
CC Cirrus Ceiling	MCL Mounting Clip	FL Fork Locking

CIRRUS CEILING T1

TUBULAR 1 WITH REMOTE POWER

T-Bar Mounting Options for Cirrus Channels

9/16" TBAR 15/16" TBAR

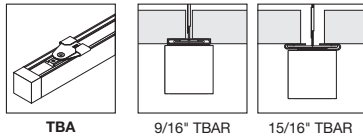



CEILING MOUNTING T-BAR CLIPS FOR 15/16" AND 9/16" CEILING GRID

TBA mounting clips are compatible with 15/16" and 9/16" T-Bar systems where the ceiling panels are flush with the grid, and 15/16" tegular ceiling panels.

System	Component	Type	Finish
CCD1M	MCL	TBA	WH
CCD1M Cirrus Ceiling	MCL Mounting Clip	TBA T-Bar Clip	WH White BK Black

15/16" TBAR






CEILING MOUNTING T-BAR CLIPS FOR 15/16" CEILING GRID

TBB mounting clips are compatible with 15/16" T-Bar systems where the ceiling panels sit below T-Bar grid (includes spacer).

System	Component	Type	Finish
CCD1M	MCL	TBB	WH
CCD1M Cirrus Ceiling	MCL Mounting Clip	TBB T-Bar Clip	WH White BK Black

OPTIMA PB VECTOR






T-BAR CLIP FOR ARMSTRONG® OPTIMA® PB VECTOR

TBC Mounting clips are compatible with Armstrong® Optima® PB Vector 15/16" T-Bar systems with 1/4" reveal ceiling panels.

System	Component	Type	Finish
CCD1M	MCL	TBC	WH
CCD1M Cirrus Ceiling	MCL Mounting Clip	TBC T-Bar Clip	WH White BK Black

SLOTTED T-BAR






T-BAR SLOT MOUNTING CLIP

TBE Mounting clips are compatible with Slotted T-Bar Drop Ceiling systems with 1/4" openings, and mounts flush anywhere along the T-Bar grid.

System	Component	Type	Finish
CCD1M	MCL	TBE	WH
CCD1M Cirrus Ceiling	MCL Mounting Clip	TBE T-Bar Clip	WH White BK Black

SLOTTED T-BAR FINELINE 1/8"



T-BAR FINELINE® SLOT MOUNTING CLIP

TBF Mounting clips are compatible with Donn® Fineline® Slotted T-Bar Drop Ceiling systems with 1/8" openings, and mounts flush anywhere along the T-Bar grid.

System	Component	Type	Finish
CCD1M	MCL	TBF	WH
CCD1M Cirrus Ceiling	MCL Mounting Clip	TBF T-Bar Clip	WH White BK Black


CIRRUS CEILING T1

TUBULAR 1 WITH REMOTE POWER


ARMSTRONG®
INTERLUDE XL HRC




FLAT 9/16" TBAR GRID




TBI



ARMSTRONG
INTERLUDE™ T-BAR,
CIRRUS BELOW
DROP CEILING TILES




CIRRUS BETWEEN
AND ACROSS
DROP CEILING TILES




T-BAR INTERLUDE CLIP AND 9/16" FLAT GRID WITH TEGULAR TILES

TBI Mounting clips are compatible with Armstrong Interlude™ T-Bar systems where the ceiling panels are flush with the bottom of the grid and compatible with 9/16" flat grid with tegular tiles that sit below the grid up to 3/8".

System	Component	Type	Finish
CCD1M	MCL	TBI	WH
CCD1M Cirrus Ceiling	MCL Mounting Clip	TBI T-Bar Clip	WH White BK Black



TBM



METAL CEILING




MAGNETIC TAPE


TBM Magnetic Tape is compatible with flat metal ceilings such as Armstrong® Metalworks™.

System	Component	Type	Finish
CCD1M	MCL	TBM	WH
CCD1M Cirrus Ceiling	MCL Mounting Clip	TBM T-Bar Magnetic Tape	WH White BK Black


Drywall Mounting Options for Cirrus Channels



CC-MCL




DRYWALL CEILING




CEILING MOUNTING SPRING CLIP

Ceiling Mounting Spring clips are provided with every 2ft of Cirrus Ceiling Channel. The Clip snaps into the channel, staying securely fastened to the ceiling or wall.


System	Component
CC	MCL
CC Cirrus Ceiling	MCL Mounting Clip



CC-MCL-L




DRYWALL CEILING




CEILING MOUNTING LOCKING CLIP

Ceiling Mounting Locking Clips may be ordered separately for extra support. The channel slides into the clip and locks in place staying securely fastened to the ceiling or to the wall.


System	Component	Type	Finish
CC	MCL	L	BK
CC Cirrus Ceiling	MCL Mounting Clip	L Locking	BK Black WH White



CCD1M-MCL-FL



DRYWALL CEILING



FORK LOCKING CLIP

Fork locking clip for ceiling or wall Mounting. The channel slides into the Fork locking Clip keeping the fixture secure.


System	Component	Type
CC	MCL	FL
CC Cirrus Ceiling	MCL Mounting Clip	FL Fork Locking

CEILING TM30 DATA

TUBULAR 1 WITH REMOTE POWER

TM-30-15 DATA: The data below is for SS2C, SS5C, SS7C, and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2400K | Rf: 91.2 | Rg: 96.8
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.0	-2.4%	1.5%
2	94.7	-2.1%	0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89.0	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%


2700K | Rf: 87.7 | Rg: 96.1
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%


3000K | Rf: 88.1 | Rg: 99.7
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%


3500K | Rf: 86.1 | Rg: 95.5
Color Vector Graphic



■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

4000K | Rf: 87.6 | Rg: 96.8
Color Vector Graphic



■ Test ■ Reference


HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%

CEILING TM30 DATA

TUBULAR 1 WITH REMOTE POWER

TM-30-15 DATA: The data below is for SS2C, SS5C, SS7C, and SS10C bare LED Soft Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2700D | Rf: 89.5 | Rg: 100.8
Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	88.8	-5.1%	1.4%
2	89.8	-2.7%	4.1%
3	87.2	0.3%	5.9%
4	92.3	-0.9%	1.0%
5	93.3	1.5%	1.7%
6	92.4	3.6%	-0.2%
7	92.2	-0.9%	-2.4%
8	96.7	-0.4%	-1.1%
9	92.3	-1.2%	3.7%
10	88.9	-0.0%	6.1%
11	86.4	5.1%	7.4%
12	88.2	6.3%	-0.9%
13	87.2	3.8%	-8.1%
14	84.2	3.8%	-11.0%
15	89.8	-2.6%	-4.3%
16	82.7	-3.4%	-11.1%


3000D | Rf: 89.8 | Rg: 101.4
Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.2	-4.2%	1.5%
2	90.9	-2.0%	3.7%
3	87.9	0.8%	5.5%
4	92.1	-0.9%	0.6%
5	93.0	1.5%	1.6%
6	92.2	3.9%	-0.2%
7	92.1	-0.3%	-2.0%
8	96.7	0.0%	-1.2%
9	92.5	-0.6%	3.7%
10	88.3	1.1%	7.0%
11	87.2	4.1%	7.4%
12	87.2	6.7%	-1.0%
13	88.2	3.8%	-7.2%
14	85.3	4.3%	-9.9%
15	90.9	-2.2%	-3.6%
16	83.4	-2.2%	-11.2%


2000K ONLY (2K6K/27K6) | Rf: 84.3 | Rg: 96.9
Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	80.3	-8.9%	1.7%
2	79.7	-7.0%	7.8%
3	78.9	-2.9%	10.0%
4	89.5	-0.5%	5.1%
5	94.4	0.7%	1.7%
6	92.1	2.4%	-0.3%
7	89.4	-2.4%	-5.9%
8	89.7	-6.4%	-0.2%
9	86.0	-4.9%	4.6%
10	81.8	-3.4%	9.3%
11	83.1	3.3%	9.7%
12	85.8	5.6%	3.3%
13	85.6	6.2%	-12.8%
14	61.7	-1.9%	-19.0%
15	79.7	-3.3%	-12.9%
16	78.1	-7.9%	-10.6%


3000K (2K6K/27K6) | Rf: 90.2 | Rg: 101.4
Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.9	-3.8%	1.3%
2	91.7	-1.9%	3.3%
3	88.7	0.7%	5.1%
4	92.4	-1.0%	0.7%
5	92.9	0.9%	1.7%
6	93.1	3.3%	-0.6%
7	91.0	-1.8%	-0.4%
8	97.0	0.2%	-1.1%
9	92.8	-0.5%	3.6%
10	88.3	1.0%	7.0%
11	87.1	3.8%	7.8%
12	87.6	6.5%	-0.3%
13	89.3	3.6%	-6.3%
14	86.1	4.5%	-9.1%
15	91.6	-1.9%	-3.1%
16	83.8	-1.5%	-11.2%


4000K ONLY (2K6K/27K6) | Rf: 89.6 | Rg: 99.1
Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	91.3	-2.5%	1.0%
2	95.3	-0.5%	0.5%
3	94.3	-0.7%	1.1%
4	91.1	-3.4%	-1.1%
5	89.5	-5.6%	0.0%
6	94.6	-1.4%	1.3%
7	93.2	-3.0%	2.6%
8	91.3	-1.8%	4.6%
9	86.5	-0.9%	9.1%
10	83.3	-0.5%	9.5%
11	83.3	4.9%	9.0%
12	89.7	4.1%	1.7%
13	90.1	3.6%	-4.3%
14	93.4	5.2%	-2.1%
15	87.4	0.4%	-4.3%
16	86.6	0.4%	-6.1%

6500K ONLY (2K6K/27K6) | Rf: 86.8 | Rg: 96.8
Color Vector Graphic



■ Test ■ Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	86.5	-4.7%	0.8%
2	91.9	-2.5%	3.1%
3	91.2	-2.0%	1.9%
4	91.2	-1.6%	1.4%
5	85.7	-6.2%	-0.9%
6	92.9	-3.5%	-1.0%
7	92.1	-4.7%	0.7%
8	85.2	-5.8%	4.9%
9	82.8	-6.2%	14.3%
10	77.1	-0.7%	15%
11	72.1	5.8%	14.1%
12	91.6	4.0%	1.0%
13	89.9	5.6%	-2.3%
14	90.5	-1.8%	-3.7%
15	81.6	6.5%	-13.9%
16	92.8	-3.6%	-0.4%