

CIRRUS SUSPENSION R1

RECTANGULAR R1 WITH POWER, CENTER FEED

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

REV 03.18.26





DESCRIPTION

Cirrus Power Suspension R1 is a linear LED fixture that offers direct light in a clean, contemporary style. Cirrus is available in various increments from 36"- 120" (10'), with a 140° White Diffused R1 Rectangular Lens, a variety of finishes, and Warm Dim options. Fixture includes a 5 year pro-rated warranty. For custom designs and quotes, send drawings to design@PureEdgeLighting.com.

INSTALLATION

- Includes Canopy with 120V/24VDC Uni-Drivers
- A 12" Rectangular Canopy used for sizes 36"- 96", 26" Rectangular Canopy is used for sizes 99"- 120"
- Includes adjustable 12' Coaxial Cables (additional Aircraft Cables included for support when fixture exceeds 72")

FINISHES

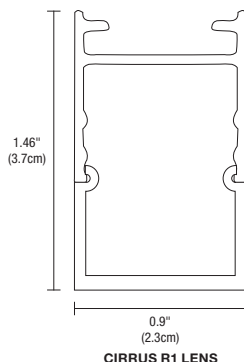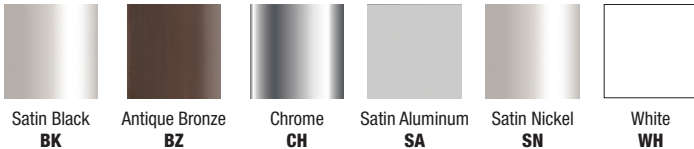

LENS

Diffused White R1 Rectangular Lens, 140° Beam Spread

LAMPING

- Choose from multiple different Color Temperatures from 2400K-4000K including Warm Dim
- Warm Dim (optional): 2700K-2000K (27D) or 3000K-2000K (30D)
- 50,000 Hour Lamp Life

POWER SUPPLY (INCLUDED IN CANOPY)

- UNI Driver: Universal Dimming (ELV, TRIAC, 0-10V)

MAKE IT SMART

- Pure Smart™ WiZ Pro Controls

APPLICATIONS

Designed for indoor use only. Ideal applications in Residential, Commercial, Retail and Hospitality environments.

APPROVALS

*Title 24 JA8 listed for 2700K CCT and above when used with PureEdge remote Universal power supplies, ETL, Class 2, Damp Location, Assembled in the USA

System	Wattage Per Foot	Canopy	Nominal Size (Inches)	Color Temperature	Finish
CSR1P	2W	C	120	30K	SN
CSR1P Cirrus Suspension Rectangular 1 Lens, with Power	2W 2.5 Watts 5W 4.4 Watts 7W 7.3 Watts 10W 9.6 Watts	C Center Feed	36-120* Order in various increments from 36"-120" *84" Maximum Length for Chrome. Refer to length chart for exact dimensions	24K 2400K Very Warm White 27K 2700K Incandescent White 27D 2700K Warm Dim (5W only) 30K 3000K Warm White 30D 3000K Warm Dim (5W only) 35K 3500K Neutral White 40K 4000K Cool White	BK Satin Black BZ Antique Bronze CH Chrome SA Satin Aluminum SN Satin Nickel WH White

CIRRUS SUSPENSION R1

RECTANGULAR R1 WITH POWER, CENTER FEED



DIFFUSED WHITE LENS

LAMP DATA Lamp Data for Cirrus Suspension R1

	CSR1P																						
DESCRIPTION	DIFFUSED RECTANGULAR 1 LENS																						
WATTS PER FOOT	2W (2.5 watts)					5W (4.4 watts)							7W (7.3 watts)					10W (9.6 watts)					
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D*	30K	30D*	35K	40K	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K	
LUMENS PER FOOT (lm/ft)	185	204	224	256	278	321	353	437	385	437	441	480	525	577	630	722	785	680	747	817	936	1017	
LUMENS PER WATT (lm/w)	74	82	89	102	111	73	80	91	87	91	100	109	72	79	87	99	107	71	78	85	97	106	
CRI	90+	95+	95+	85+	85+	90+	95+	92+	95+	92+	85+	85+	90+	95+	95+	85+	85+	90+	95+	95+	85+	85+	

*27D, 30D - Warm Dim (4.8 Watts)


8', 140° AT 3000K

2 Watt 140°	
Distance	Foot Candles
1'	69
1.5'	46
2'	35
3'	23
4'	16
5'	12
6'	10
7'	8
8'	7


5 Watt 140°	
Distance	Foot Candles
1'	111
1.5'	75
2'	56
3'	37
4'	27
5'	20
6'	16
7'	13
8'	11

7 Watt 140°	
Distance	Foot Candles
1'	180
1.5'	120
2'	90
3'	60
4'	43
5'	33
6'	26
7'	21
8'	18

10 Watt 140°	
Distance	Foot Candles
1'	191
1.5'	127
2'	95
3'	62
4'	45
5'	34
6'	27
7'	21
8'	19

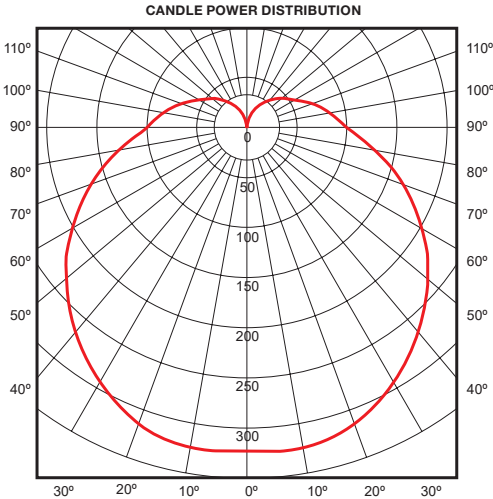

140° BEAM SPREAD

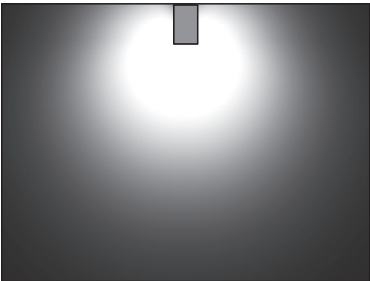



CIRRUS SUSPENSION R1
RECTANGULAR R1 WITH POWER, CENTER FEED



PROJECT
FIXTURE TYPE
DATE

REV 03.18.26

LENGTH CHART Actual lengths for Cirrus Suspension R1

STATIC WHITE		
Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)
36	37.0	37.0
39	39.4	39.4
41	41.8	41.8
44	44.2	44.2
46	46.6	46.6
48	49.0	49.0
51	51.4	51.4
53	53.8	53.8
56	56.2	56.2
58	58.6	58.6
60	61.0	61.0
63	63.4	63.4
65	65.8	65.8
68	68.2	68.2
70	70.6	70.6
72	73.0	73.0
75	75.4	75.4
77	77.8	77.8
80	80.2	80.2
82	82.6	82.6
84*	85.0	85.0
87	87.4	
89	89.8	
92	92.2	
94	94.6	
96	97.0	
99	99.4	
101	101.8	
104	104.2	
106	106.6	
108	109.0	
111	111.4	
113	113.8	
116	116.2	
118	118.6	
120	121.0	

*84" max shipping length for chrome


WARM DIM		
Ordering Code (Nominal Size)	Actual Length (Inches)	Actual Length (Chrome)
36	37	37
39	40	40
42	43	43
45	46	46
48	49	49
51	52	52
54	55	55
57	58	58
60	61	61
63	64	64
66	67	67
69	70	70
72	73	73
75	76	76
78	79	79
81	82	82
84*	85	85
87	88	
90	91	
93	94	
96	97	
99	100	
102	103	
105	106	
108	109	
111	112	
114	115	
117	118	
120	121	

CIRRUS SUSPENSION R1

RECTANGULAR R1 WITH POWER, CENTER FEED

REV 03.18.26

DRAWINGS Dimension drawings for Cirrus Suspension R1

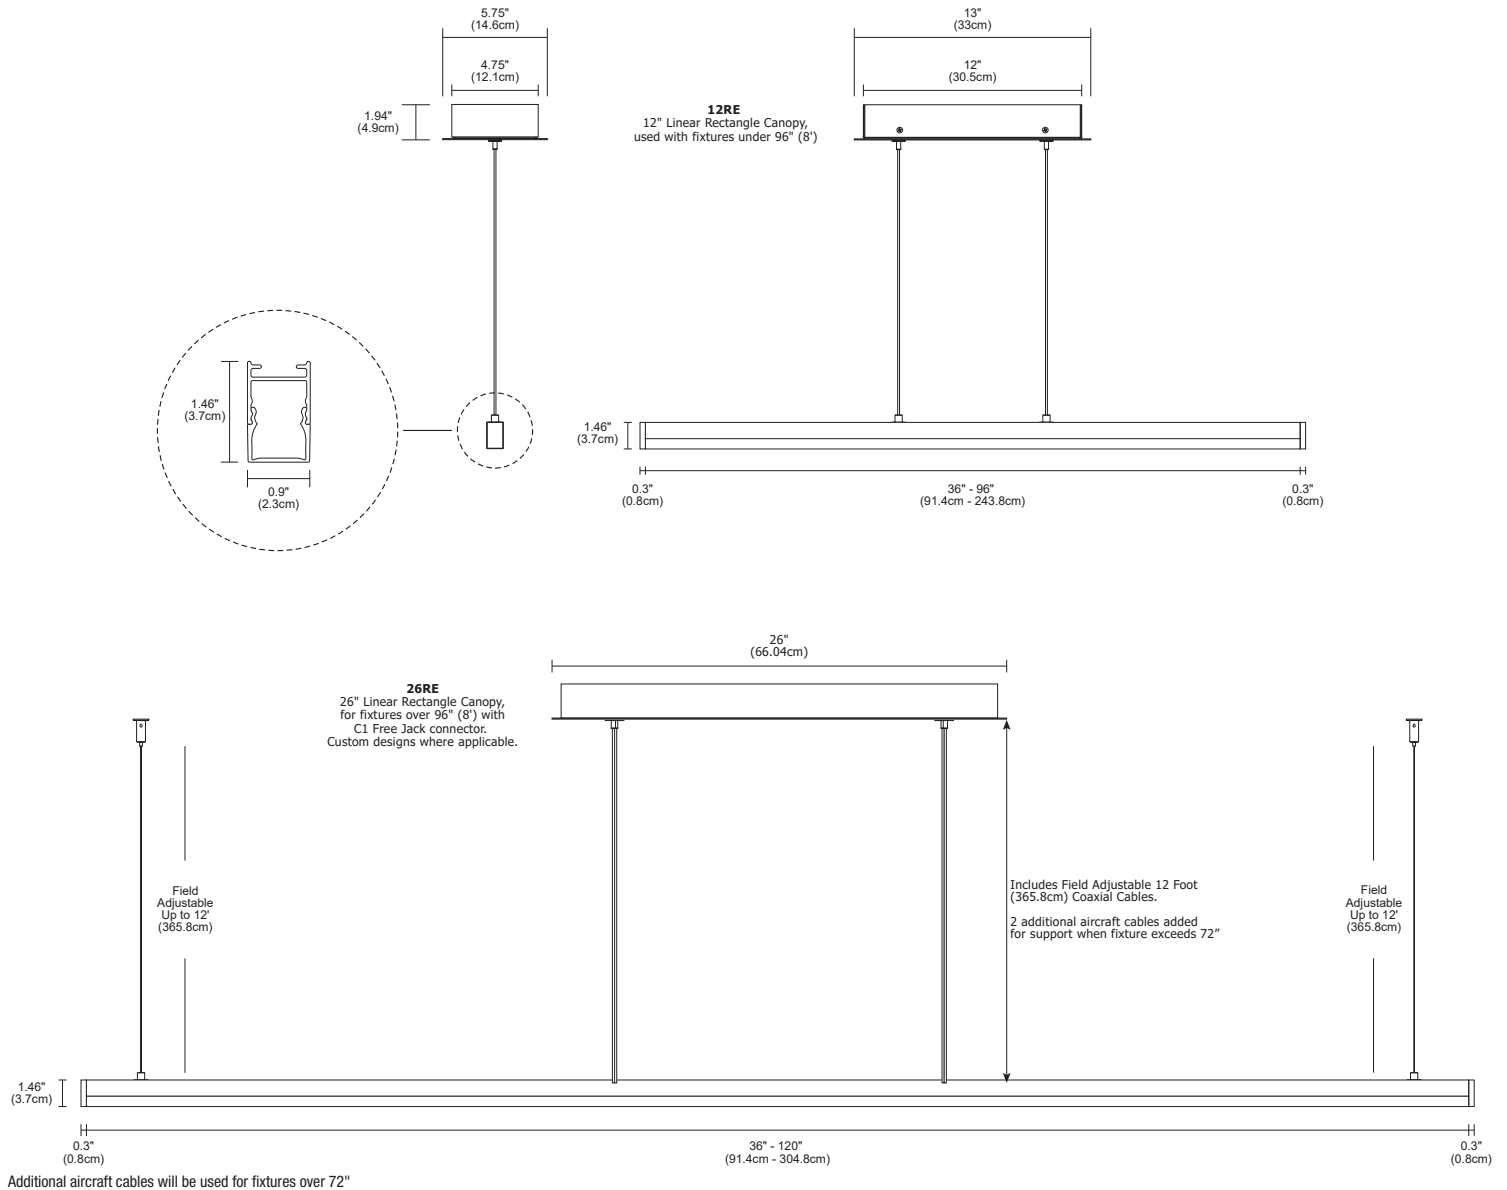


CIRRUS SUSPENSION R1

RECTANGULAR R1 WITH POWER, CENTER FEED

WIRING DIAGRAM Wiring Diagram for Static White with ELV Dimmer


APPLICATION ELV or Triac dimming for Cirrus Power Suspension R1, Center Feed Canopy with Fast Jack (C1), Static White

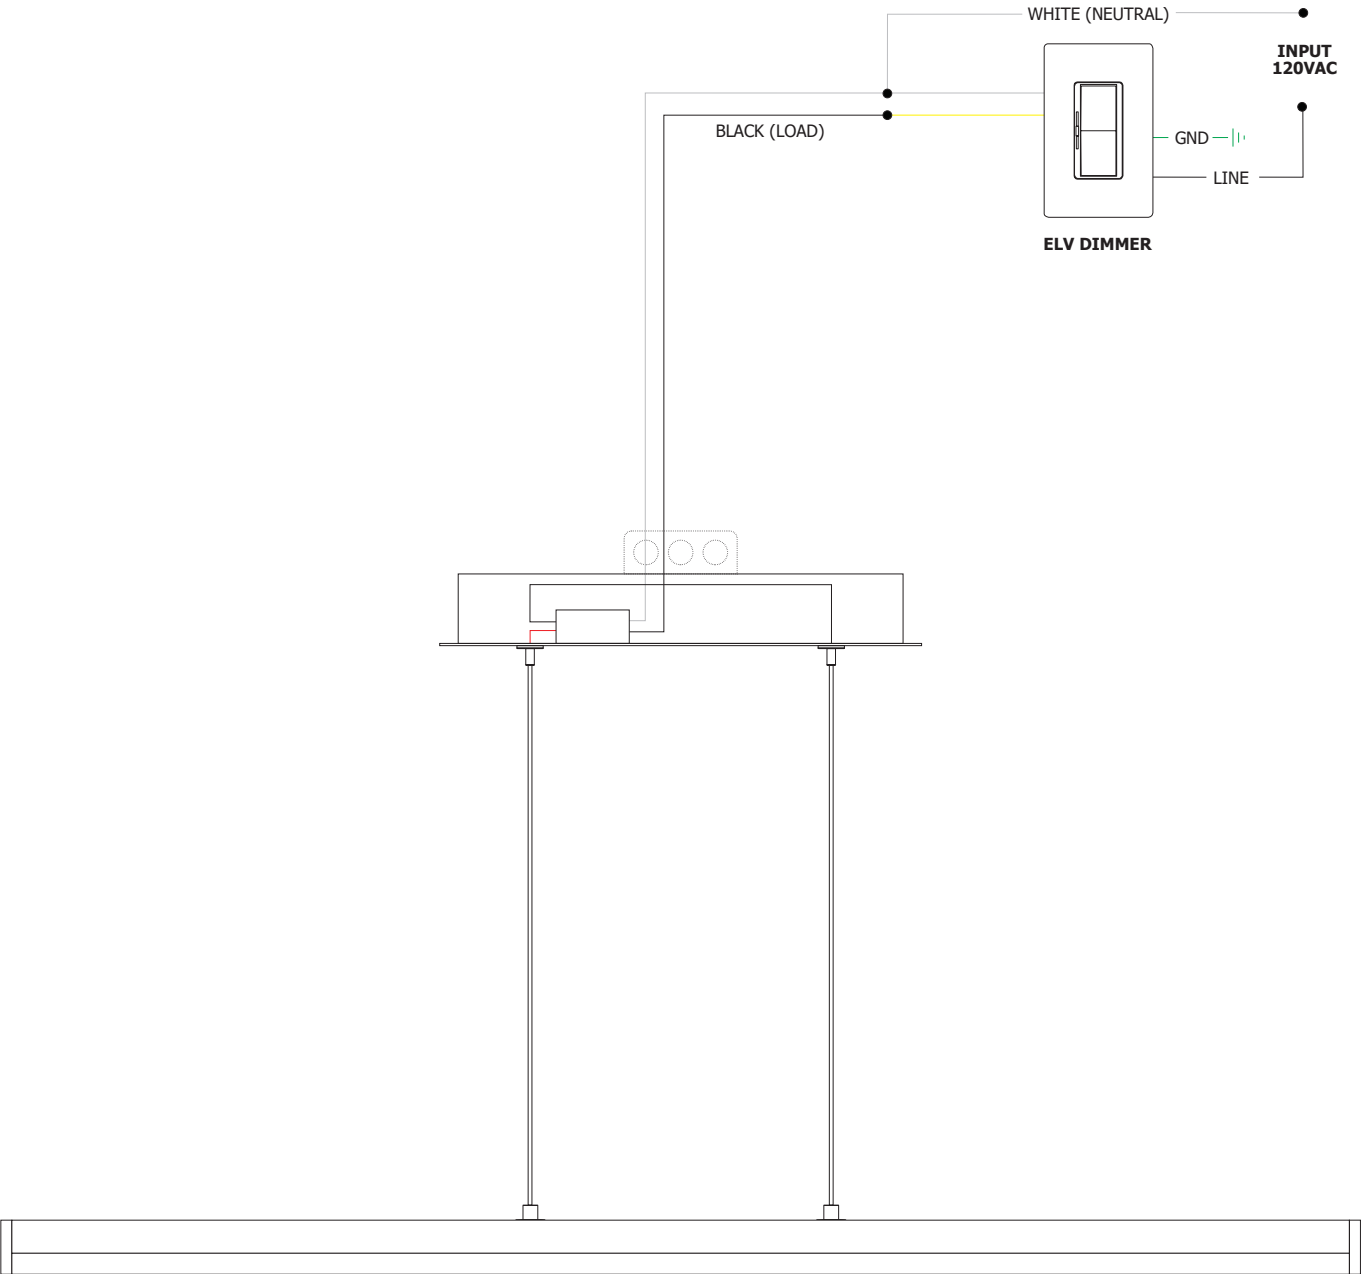

WIRING DIAGRAMS UNIVERSAL POWER SUPPLY


Application: ELV dimming for Static White and Warm Dim

Dimming: Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

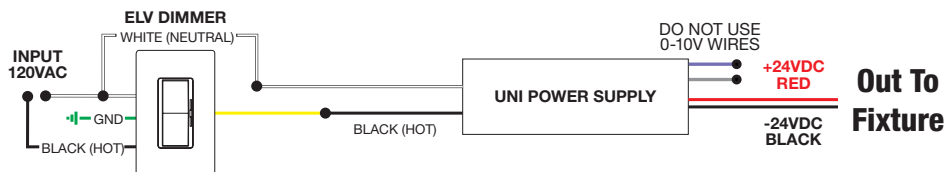

Application: 0-10V dimming for Static White

Dimming: Dimmable with 0-10V dimmer: Philips Sunrise: SR1200ZTUNV; Lutron Diva: DVTV-WH, DVSTV-WH; Lutron Nova T: NTSTV-DV-XX; Lutron Grafix EYE QS: QSGRJ-XP; Lutron Radio Ra2: RRD-10ND; Leviton: LEV40050; Leviton IP710-LFZ; Legrand: ADPD4FBL3P2W4

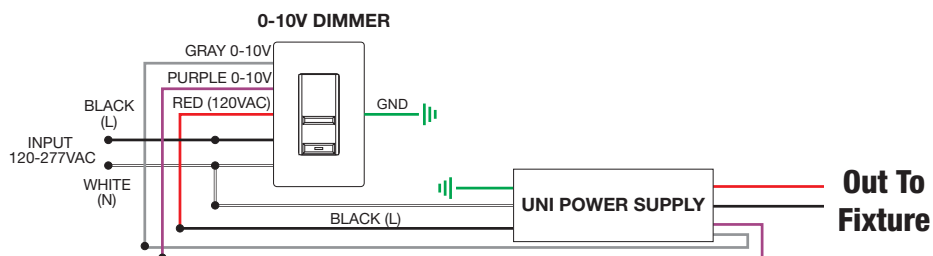


SUSPENSION TM30 DATA

RECTANGULAR R1 WITH POWER, CENTER FEED

TM-30-15 DATA: The data below is for bare LED Static White Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 84.5 | Rg: 94.4

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92	-2.4%	1.5%
2	94.7	-2.1%	-0.0%
3	95.4	-1.9%	-0.1%
4	88.7	-6.7%	-3.1%
5	92.8	-5.6%	1.0%
6	92.7	-3.4%	3.4%
7	89.9	-4.3%	4.1%
8	92.4	-1.4%	4.4%
9	89	-0.6%	5.8%
10	88.9	0.4%	6.2%
11	89.7	4.0%	5.4%
12	92.6	3.0%	-0.7%
13	90.9	1.1%	-7.0%
14	89.9	0.5%	-5.8%
15	92.1	-3.2%	0.1%
16	88.9	-1.7%	-6.3%

2700K | Rf: 87.7 | Rg: 96.1

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.0	-4.3%	2.6%
2	91.6	-2.4%	2.0%
3	93.7	-1.4%	1.9%
4	88.9	-5.6%	-3.1%
5	92.3	-5.5%	-0.5%
6	92.9	-3.5%	0.1%
7	84.5	-7.5%	4.6%
8	90.8	-3.0%	4.4%
9	84.5	-1.3%	8.3%
10	83.9	2.0%	9.8%
11	87.2	5.3%	7.1%
12	89.2	5.4%	-2.6%
13	88.7	0.3%	-7.8%
14	86.8	1.7%	-9.3%
15	87.6	-5.4%	-1.3%
16	83.6	-3.3%	-9.5%

3000K | Rf: 88.1 | Rg: 99.7

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	92.5	-3.1%	0.3%
2	93.3	-2.3%	1.9%
3	90.9	-0.8%	3.9%
4	94.3	-1.1%	1.4%
5	92.5	-2.6%	1.5%
6	96.4	1.2%	-0.3%
7	92.6	-2.5%	-0.0%
8	96.9	-1.4%	0.2%
9	92.3	-1.8%	4.3%
10	86.6	-0.7%	7.0%
11	86.5	2.4%	8.2%
12	89.8	5.9%	1.7%
13	93.9	2.6%	-2.7%
14	89.4	5.1%	-5.8%
15	90.1	-0.1%	-4.7%
16	86.5	0.3%	-9.7%

3500K | Rf: 86.1 | Rg: 95.5

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	90.8	-3.8%	0.3%
2	92.3	-2.8%	2.1%
3	89.7	-1.0%	4.3%
4	92.6	-1.4%	1.7%
5	91.8	-3.1%	1.3%
6	96.2	0.8%	-0.4%
7	92.9	-3.2%	0.2%
8	94.3	-2.5%	1.5%
9	90.4	-2.5%	5.2%
10	84.3	-1.4%	9.5%
11	83.1	3.5%	9.8%
12	88.2	4.8%	3.4%
13	94.0	2.7%	-2.0%
14	88.7	5.9%	-5.8%
15	88.7	0.7%	-5.9%
16	86.8	-0.7%	-6.7%

4000K | Rf: 87.6 | Rg: 96.8

Color Vector Graphic




■ Test ■ Reference

HUE BIN	Rf	GRAPHIC SHIFTS %	
		CHROMA	HUE
1	88.9	-2.4%	2.5%
2	93.3	-0.4%	0.8%
3	94.8	-1.0%	-0.6%
4	87.9	-4.9%	-3.6%
5	85.3	-9.4%	-2.6%
6	90.2	-6.0%	0.2%
7	85.3	-7.6%	4.6%
8	83.7	-4.1%	8.2%
9	79.5	-1.1%	13.8%
10	78.6	1.5%	12.1%
11	83.5	6.4%	7.8%
12	90.9	3.6%	-1.1%
13	88.3	1.7%	-6.3%
14	91.9	-0.4%	-2.2%
15	84.5	-0.9%	-5.5%
16	84.7	-1.1%	-4.4%

SUSPENSION TM30 DATA
RECTANGULAR R1 WITH POWER, CENTER FEED

TM-30-15 DATA: The data below is for bare LED Warm Dim Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.


2700D | Rf: 90.7 | Rg: 101.1
Color Vector Graphic



Test Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	90.9	-4.1%	1.1%
2	91.8	-2.2%	3.2%
3	89.0	0.2%	5.0%
4	92.9	-1.1%	0.8%
5	93.9	1.1%	1.7%
6	93.3	3.3%	0.0%
7	93.1	-0.5%	-1.9%
8	97.2	-0.3%	-0.9%
9	93.4	-1.0%	3.2%
10	89.9	-0.1%	5.6%
11	87.0	4.7%	7.2%
12	89.2	5.8%	-0.2%
13	89.1	3.5%	-6.7%
14	86.3	4.1%	-9.2%
15	91.4	-2.0%	-3.6%
16	84.7	-2.1%	-10.3%

3000D | Rf: 90.6 | Rg: 101.1
Color Vector Graphic



Test Reference

		GRAPHIC SHIFTS %	
HUE BIN	Rf	CHROMA	HUE
1	91.5	-3.5%	1.3%
2	92.2	-1.8%	3.0%
3	89.3	0.5%	4.8%
4	92.7	-1.1%	0.6%
5	93.3	0.5%	1.4%
6	93.8	2.7%	-0.8%
7	91.2	-2.1%	-0.2%
8	97.0	-0.5%	-0.7%
9	92.5	-0.7%	3.8%
10	88.3	0.9%	7.1%
11	87.5	3.9%	7.6%
12	88.2	6.2%	-0.2%
13	89.9	3.4%	-6.0%
14	86.9	4.4%	-8.5%
15	91.9	-1.9%	-2.9%
16	84.7	-1.3%	-10.6%