



KURVE DISPLAY SIGN

24VDC SYSTEM, 85+ OR 95+ CRI

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA



REV.10.17.23



DESCRIPTION

Kurve Display Sign features a lambertian white diffuser that provides uniform light without hotspots. At 7.5 watts per foot, the 24 volt DC channel contains 85+ or 95+ CRI LEDs and mounts 14 inches from wall. It may be ordered with a 4.6 inch round canopy that fits on a standard junction box or a 2" feed through stem with round plaster ring. Hinges on the fixture arm rotates up to 90 degrees (from facing the wall to straight down). Kurve is powered by a Class 2 remote power supply up to 40 feet away. Available from 12 inches to 120 inches/10 feet. May be ordered in 3, 5, 8 or 10 inch increments. Fixtures include a 5 year warranty. For custom designs and quotes, send drawings to design@PureEdgeLighting.com.



FINISHES



Satin Black
BK



Satin Nickel
SN

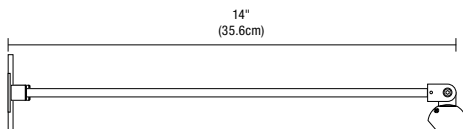

LENS

100° diffused white lens with optional black or white louvers

LAMP

50,000 Hour Lamp Life

Version	Watts per Foot	Lumens		85+CRI 35K, 40K	95+CRI 27K, 30K
		per Watt	per Foot		
7W	7.5	36	270	•	•

Lumen values are based on the 3000K LED test.

REMOTE POWER SUPPLIES* & DIMMERS

(SOLD SEPARATELY)


24VDC, Class 2 wiring

- [UNI Driver: Universal Dimming \(TRIAC, ELV, 0-10V\)](#)
- [Lutron](#) Hi-Lume/Ecosystem

*In-Wall Mounting and drop ceiling Kits available for select power supplies

APPLICATIONS

Wall wash and retail stores



Feed-Through Power
Stem



4.6" Round
Canopy

System	Wattage	Canopy	Nominal Size	Color Temperature	Finish
KD	7W	4RD	120IN	27K	SN

KD Kurve Display

5W 5 watts
7W 7.5 Watt

4RD 4.6" Round
FTP Feed-Through Power Stem

12-120 Order in 12" increments up to 120"
May be ordered in 3", 5", 8" or 10" increments

27K 2700K Very Warm White
30K 3000K Warm White
35K 3500K Neutral White
40K 4000K Cool White

BK* Black
SN* Satin Nickel


*Limited Quantities,
Call for Availability

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--



KURVE DISPLAY SIGN

24VDC SYSTEM, 85+ OR 95+ CRI

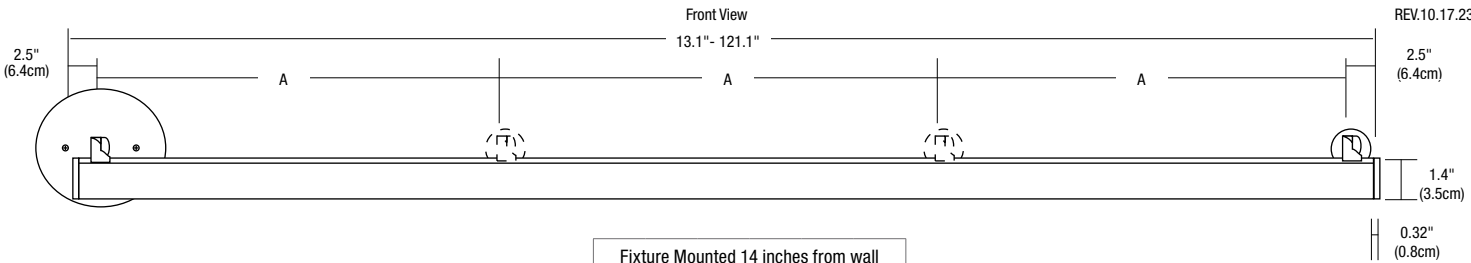

Fixture Mounted 14 inches from wall						
1'	91	91	91	91	91	91
2'	52	52	52	52	52	52
3'	28	28	28	28	28	28
4'	22	22	22	22	22	22
5'	14	14	14	14	14	14
6'	11	11	11	11	11	11
7'	9	9	9	9	9	9
8'	5	5	5	5	5	5

KURVE DISPLAY SIGN ACTUAL LENGTH			
ORDERING CODE (NOMINAL SIZE)	LENGTH (INCHES)	STEM QUANTITY	STEM SPACING (A)
12IN	13.1	2	8.1
15IN	15.5	2	10.5
17IN	17.9	2	12.9
20IN	20.3	2	15.3
22IN	22.7	2	17.7
24IN	25.1	2	20.1
27IN	27.5	2	22.5
29IN	29.9	2	24.9
32IN	32.3	2	27.3
34IN	34.7	2	29.7
36IN	37.1	2	32.1
39IN	39.5	2	34.5
41IN	41.9	2	36.9
44IN	44.3	2	39.3
46IN	46.7	2	41.7
48IN	49.1	2	44.1
51IN	51.5	3	23.25
53IN	53.9	3	24.45
56IN	56.3	3	25.65
58IN	58.7	3	26.85
60IN	61.1	3	28.05
63IN	63.5	3	29.25
65IN	65.9	3	30.45
68IN	68.3	3	31.65
70IN	70.7	3	32.85
72IN	73.1	3	34.05
75IN	75.5	3	35.25
77IN	77.9	3	36.45
80IN	80.3	3	37.65
82IN	82.7	3	38.85
84IN	85.1	3	40.05
87IN	87.5	3	41.25
89IN	89.9	3	42.45
92IN	92.3	3	43.65
94IN	94.7	3	44.85
96IN	97.1	3	46.05
99IN	99.5	4	31.5
101IN	101.9	4	32.3
104IN	104.3	4	33.1
106IN	106.7	4	33.9
108IN	109.1	4	34.7
111IN	111.5	4	35.5
113IN	113.9	4	36.3
116IN	116.3	4	37.1
118IN	118.7	4	37.9
120IN	121.1	4	38.7

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--