🚇 🕬 🐝 🔳 🗖 🔳 🚛 🦕 🗣 🌑 🎧 🕼 🖓 Wiz

LIGHT CHANNEL 0.3" DIY SURFACE MOUNT WITH LAZER & STOMP STRIP 24VDC STATIC WHITE. MONOCHROMATIC COLOR. TUNABLE WHITE. RGB & RGBTW

PureSmart Lighting

MADE IN AMERICA

MADE IN AMERICA	REV 03.25.25
LCS.3 LIGHT CHANNEL 100° DIFFUSED LENS WITH LAZER STRIP Diffused Lens provides a greater dispersion of light levels without pixelation	LCS.3 LIGHT CHANNEL 100° DIFFUSED LENS WITH TRUCOLOR™ RGBTW Diffused Lens provides a greater dispersion of light levels with some visible pixelation

LCS.3 LIGHT CHANNEL 100° CLEAR LENS WITH LAZER STRIP Clear Lens provides maximum light levels without pixelation

LCS.3 LIGHT CHANNEL 100° CLEAR LENS WITH TRUCOLOR™ RGBTW Clear Lens provides maximum light levels with visible pixelation

0.35" (0.9cm)	
0.7" (1.8cm)	
	111



Functional and Architectural, our new generation of 0.3" DIY (Do-It-Yourself) light channel delivers smooth, continuous light without pixelation, using our patented Lazer Strip with remote phosphor technology. The diffused lens also ensures pixel-free illumination when paired with Soft Strip. The slim and shallow profile is less than 3/8" high, field-cuttable, and available with three lens options. Offered in a broad range of wattages and color temperatures, including Static White (2400K - 4000K), Monochromatic Color (RZ, BZ, GZ, AZ), Tunable White (2K6K), Dynamic RGB (all color temperatures with Lazer Strip), and TruColor[™] **RGBTW** (RGB with Tunable White 1500K – 6500K), featuring our proprietary 5-channel color-changing technology, 24VC, Class 2 remote power supplies can be located up to 40 feet away. Includes a 5-year pro-rated warranty. For custom quotes and layout assistance, send your drawings and ideas to our design team: <u>design@PureEdgeLighting.com</u>.

FEATURES & BENEFITS

- Cut and assemble in field.
- Available with Solderless Pin Connections or with 6' Soldered Leads
- 24VDC LED Strip offers excellent color-rendering
- 5 oz of copper provides better heat dissipation, less voltage drop
- Surface mount channel sold in 2', 4', 5', 8' and 10' increments

REQUIRED COMPONENTS (SOLD SEPARATELY)

- Light Channel 0.3" Surface Mount and Lens (Mounting Clips included)
- End Caps (sold in pairs)
- 24VDC Light Channel Power Connector
- 24VDC LED Soft/Stomp Strip or Lazer Strip

LENS OPTIONS

- (C) 100° Clear Lens provides maximum illumination use of a 40° transparent lens
- (D) 100° Diffused White Lens projects clean lines of light
- (G) Diffused Lens with gel color (PROVIDED BY CUSTOMER) Clear and Diffuser Lens are Gel Color Filter Suitable allowing for color personalization. Zircon LED Gel filters recommended. Purchase Gel Lens from <u>www.leefilters.com</u>. See manufacturer spec sheet for more information.

*Diodes will not be visible with any Lazer Strip COB. TruColor™ RGBTW will show pixelation with clear lens and minimal pixelation with diffused lens.

LED STRIP OPTIONS

Static White: From 2400K to 4000K Monochromatic Color: Red, Green, Blue and Amber Tunable White (2K6K) Dynamic Red, Green and Blue (RGB) TruColor™ RGBTW Color Changing RGB with Tunable White 1500K-6500K

APPROVALS/COMPLIANCE

*Title 24 JA8 listed for 2700K CCT and above when used with PureEdge remote Universal power supplies, ETL, Class 2, Damp Location, Made in USA.

APPLICATIONS

- DIY systems engineered for the weekend warrior or the master electrician
- Provides maximum light levels for task and general illumination
- Indoor only.

FIXTURE TYPE


www.PureEdgeLighting.com | Phone: 773.770.1195 | 1718 W. Fullerton Ave. Chicago, IL 60614 PureEdge Lighting reserves the right to modify this specification without prior notice

LIGHT CHANNEL 0.3" DIY SURFACE MOUNT WITH LAZER & STOMP STRIP 24VDC STATIC WHITE. MONOCHROMATIC COLOR. TUNABLE WHITE. RGB & RGBTW

> (1.4cm) 0.7"

(1.8cm)

PURE EDGE

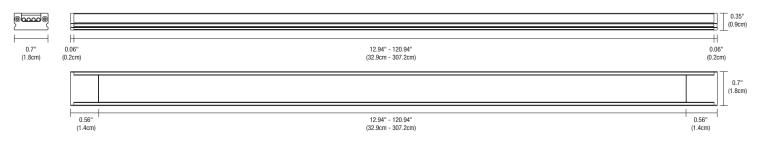


REQUIRED COMPONENTS: Select Light Channel .3 Surface Mount option, End Caps and Power Connector based on lighting design.




D LCS.3 Light Channel Diffused Lens



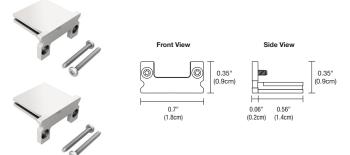

LIGHT CHANNEL .3 SURFACE MOUNT

Start the ordering process by selecting the desired length and lens option. Then order the LED Strip, End Caps and Power Feed. At 0.35 inches tall the channel is low profile, made of paintable aluminum, and fits a 24VDC LED Strip inside. The channel and lens may be cut in the field, and may be joined together using Wago lever nuts. Mounting Clips are included with every 2' of channel, and may be ordered separately as replacement parts. The Clear Lens provides maximum light levels and will show LED dots. The Diffuser Lens will reduce LED dots but will not eliminate them. To eliminate LED does use Light Channel .6 Surface Mount with a Diffuser Lens. Both the Clear and Diffused Lens are Gel Color Filter Suitable allowing for color personalization. Zircon LED Gel filters are recommended and can be purchased from the dealer <u>www.leefilters.com</u>. Gel filter life is 5,000 hours before needing to be changed.



END CAPS

End Caps are sold in pairs and provide a finished look at the end of a run as well as hold the required power connector.




24VDC LED TUNABLE WHITE & RGB



REV 03.25.25

LIGHT CHANNEL SURFACE MOUNT SYSTEM OVERVIEW: TRADITIONAL DIMMING, 0-10, DMX AND DALI

H. Remote Power Supply

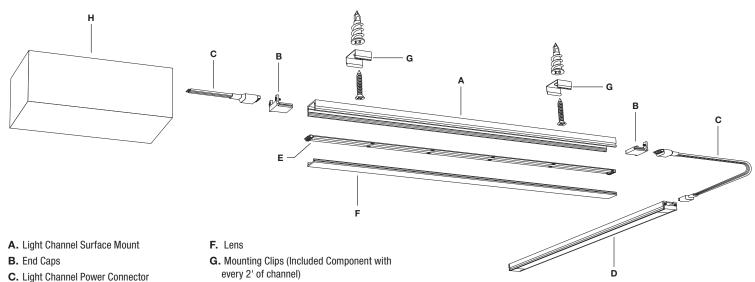

- **D.** Light Channel Surface Mount Assembly
- E. 24VDC LED Strip
- Profile Тор 0.62" 0.52" T 0.21 C (1.6cm) (0.5cm) 4RD-WH 4.6' 4.6" (11.7cm) (11.7cm) 0.96" (2.4cm) 2.78" 0.63" (7.1cm) Т (1.6cm 0.26" (0.7cm) 3RE-WH 4.52" (11.5cm)


CANOPY COVER & SPLICE BOX

Use for remote located power supply. The 3 inch rectangle or 4 inch round white canopy covers the electrical box and feeds wires for Light Channel. The Splice Box provides a safe enclosure for low voltage connections.



JUNCTION BOX

Low voltage Splice Box with connectors.

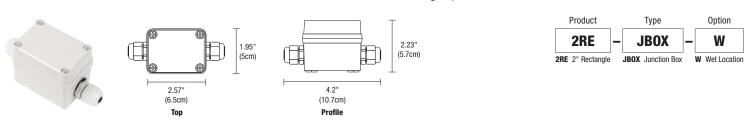

PROJECT

 FIXTURE TYPE
 DATE

 www.PureEdgeLighting.com
 Phone: 773.770.1195
 1718 W. Fullerton Ave. Chicago, IL 60614


 PureEdge Lighting reserves the right to modify this specification without prior notice
 Fixed State Stat

3

LIGHT CHANNEL 0.3" DIY SURFACE MOUNT WITH LAZER & STOMP STRIP 24VDC STATIC WHITE, MONOCHROMATIC COLOR, TUNABLE WHITE, RGB & RGBTW



LIGHT CHANNEL SURFACE MOUNT SYSTEM OVERVIEW: WIZ

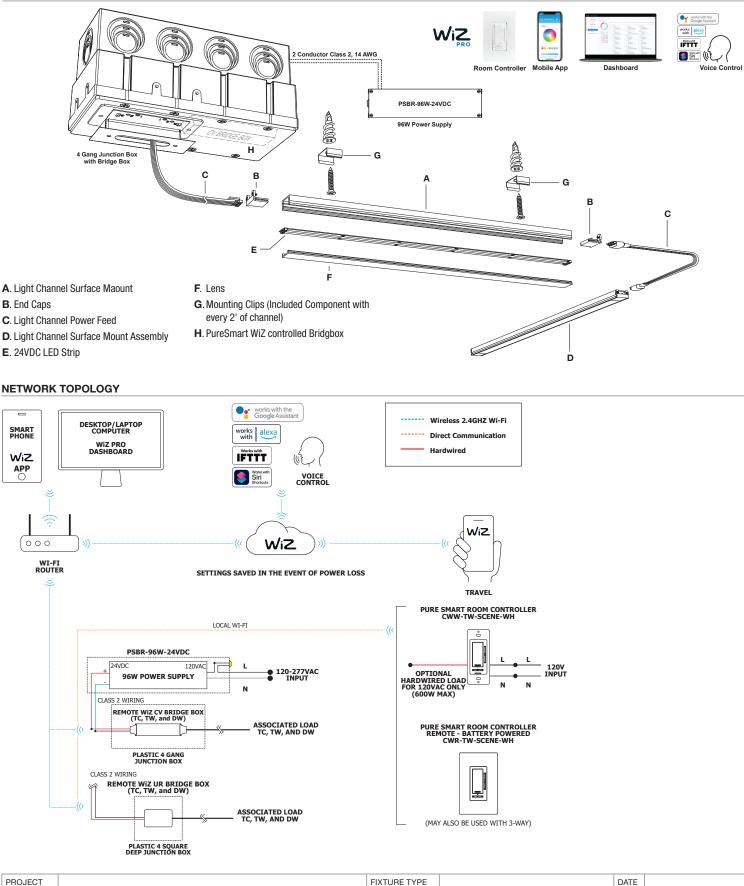

www.PureEdgeLighting.com | Phone: 773.770.1195 | 1718 W. Fullerton Ave. Chicago, IL 60614 PureEdge Lighting reserves the right to modify this specification without prior notice PSBR-96W-24VDC

96W Power Supply

3.772"

(9.4cm)

Ð

 \oplus

Å,

PURE EDGE EDGE

TRUCOLOR[™] RGBTW COMPONENTS

CV BRIDGE

7.74" (†972cm)

(19<u>7</u>, 70, m)

(19.7cm)

Ð

0

3

3 88'

(9.9cm)

4"


(10.2cm

2 Conductor Class 2 14 AWG

°®


1" RECTANGLE CANOPY WITH 4 GANG JUNCTION BOX AND PURE SMART WIZ PRO CV BRIDGEBOX


The slim profile 1RE Canopy with a 4-gang Junction Box features adjustable hanger bars and a Pure Smart WiZ Pro CV Bridgebox for wireless control of your CCT selection. It requires two Class 2, 14AWG stranded conductors from the Remote Power Supply, which can be up to 40 feet away.

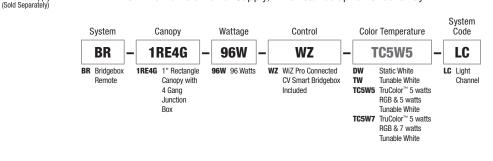

T BAR DROP CEILING SURFACE 4" SQUARE GANG JBOX AND PURE SMART WIZ PRO UR BRIDGEBOX


The 4" Square Junction Box, positioned above the T-bar ceiling, includes connectors for fast and secure connections to the fixture and the Pure Smart WiZ Pro 96 watt UR Bridgebox. Requires two Class 2, 14 AWG stranded conductors from the Remote Power Supply, which can be up to 40 feet away. Quick shipping is available for rough-in installations

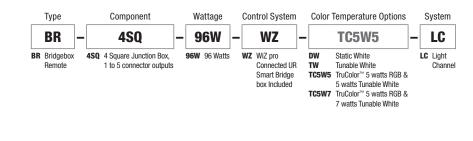



appearance. Includes a 4-gang junction box with adjustable bar hangers and a goof plate to correct any plastering imperfections around the junction box. Quick shipping is available for rough-in installations.





WiZ Pro UR Bridgebox

> 4" (10.2cm

1" RECTANGLE CANOPY & 4 GANG JUNCTION BOX

PROJECT

FIXTURE TYPE


DATE





CV BRIDGE BOX ONLY


The Pure Smart[™] Class2 wiring Type, for use in tight spaces like a cabinet. CV96W RGBTW Bridgebox enables wireless control of a constant voltage, 5 Channel RGBTW LED load with the WiZ Pro wireless control ecosystem. For use with Non-Dim PSB (PSBR-96W-24VDC).





PURE SMART/WIZ PRO UR BRIDGEBOX


The Phillips WiZ Pro Type UR RGBTW Bridgebox is a low voltage Class 2 wireless control module allowing for 5 Channel (RGBTW) full color control within the WiZ Pro wireless control ecosystem. Same as UR but with mounting holes. 24V input voltage For use with Non-Dim PSB (PSBR-96W-24VDC).



LIGHT CHANNEL 0.3" DIY SURFACE MOUNT WITH LAZER & STOMP STRIP 24VDC STATIC WHITE, MONOCHROMATIC COLOR, TUNABLE WHITE, RGB & RGBTW




Accessories: Indoor Light Channel .3 Surface Mount, order based on lighting design or as replacement parts



PIN CONNECTORS


Extra soldering pin connectors. Male and female.






LC-MCL mounting clips are provided with every two feet of Light Channel and may be ordered separately as replacement parts. The LC-MCL-075 rotates Light Channel up to 75 degrees. LC-MCL-90 mounts Light Channel at a 90 degree angle.



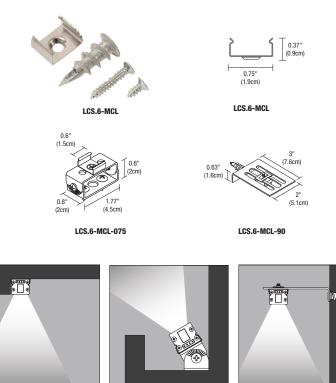

SHOWN WITH LCS.6-MCL





SHOWN WITH LCS.6-MCL-90

www.PureEdgeLighting.com | Phone: 773.770.1195 | 1718 W. Fullerton Ave. Chicago, IL 60614

LAZER STRIP COB[™]

24VDC WITH PIN CONNECTORS

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

24KZ - 2400K Amber White

27KZ - 2700K Very Warm White

30KZ - 3000K Warm White

35KZ - 3500K Neutral White

40KZ - 4000K Neutral White



 FEV 03.25.25

 #24V

 #24V

 #24V

 #6B - Red, Green and Blue (5W only)

 #24V

 </

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS

<u>Electronic Low Voltage</u> (ELV)[†] 50W (fits inside junction box)

0-10V Requires two dimmers, one for intensity and one for color

[†]ELV power supplies are not compatible with nLight, use only universal power supplies

• Industrial 3M tape lines back of strip for self-adhesion to most smooth

· Additional Connectors, Mounting Straps, and Clips may be needed for

STATIC WHITE & MONOCHROMATIC COLOR

• UNI Driver: Universal Dimming (TRIAC, ELV, 0-10V)

• Pure Smart[™] WiZ Pro Power Supplies & Controls

*In-Wall Mounting Kits available for select power supplies

some applications (sold separately)

(SOLD SEPARATELY)

Lutron Hi-Lume[®]

TUNABLE WHITE

temperature

DMX & Controls


DMX & Controls

finished surfaces

MOUNTING

RGB

Home Integration Solutions



FEATURES & BENEFITS

148 LEDs per foot provide uniform light distribution without dots and low glare

RZ - Red

BZ - Blue

GZ - Green

AZ - Ambe


- Solderless Pin Connectors reduce labor during installation
- Gold Plated Contacts prevent oxidation to ensure longevity of LEDs
- 3 oz of copper with 12 mm wide board provides better heat dissipation and less voltage drop
- 24VDC LED Lazer Strip is offered in Static White and Static Color options
- Solid State Power Supply offers 85-90% efficiency compared to magnetic at 80%.
- 50-watt power supply fits into J-Box (PS-60L-ELV-24VDC)

SPECIFICATIONS

- 24VDC LED Lazer Strip with 120° beam angle
- Available in 3.3 or 4.4 watts
- May be field-cut in 2.4" increments
- Sold in 1' long increments
- Class 2 Damp Listing; 100 watt limit per power supply

LAMP DATA

- Average life is 50,000 hours
- Operating temperature: -22°F to 140°F (-30°C to 60°C)
- Includes a 5-year pro-rated warranty

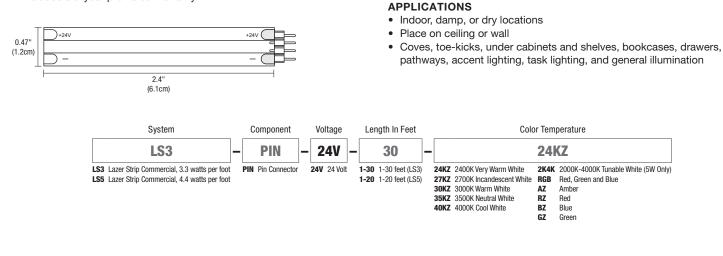


PROJECT

www.PureEdgeLighting.com | Phone: 773.770.1195 | 1718 W. Fullerton Ave. Chicago, IL 60614





ACCESSORIES Order based on your lighting design specifications or as replacement parts



LIGHT CHANNEL POWER CONNECTOR


One Female Power Connector is included with each order of channel. For jumper connections, we recommend using WAGO 221 Lever Nuts according to your specific application requirements.

STATIC WHITE/MONOCHROMATIC COLOR



LS Lazer Strip FE Feed Connector Cord CON Connector 72IN 72 Inches DW Static White

TUNABLE WHITE



LAMP DATA

			LS3			LS5						
WATTS PER FOOT			3W (3.3 watts)		5W (4.4 watts)							
COLOR TEMPERATURE	24KZ	27KZ	30KZ	35KZ	40KZ	24KZ	27KZ	30KZ	35KZ	40KZ		
LUMENS PER FOOT (Im/ft)	253	269	361	363	391	318	338	454	456	492		
LUMENS PER WATT (Im/w)	77	82	109	110	119	72	77	103	104	112		
CRI	90+	95+	95+	85+	85+	90+	95+	95+	85+	85+		

Pin Connector

+24V	+24V
D -	


WIFT WIZ STOMP STRIP, STATIC WHITE 24VDC WITH PIN CONNECTORS

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA



REV 03.25.25





Our Low Voltage LED strips are highly durable, designed to withstand the harsh elements of a job site, and precision engineered to provide superior color rendering up to 92+ CRI. Both Stomp Strip and Soft Strip are used for our **DIY** (Do-it-Yourself) fixtures and systems.

FEATURES & BENEFITS

- Offered with pin connectors reducing time and labor during installation
- Developed to meet popular demand for resilient performance without sacrificing output, color rendering and efficacy
- Tolerance: Created to resist damage in rigorous environments such as busy commercial jobsites
- Compact LED spacing: Produces uniform light distribution without visible diodes or hot spots when used within a diffused lens
- 4oz Layer of Copper Busbar: Provides superior heat dissipation and less voltage drop equivalent to 14AWG wire
- Premium Coating: Optically Clear Silicone prevents fading over time
- Mounting: Industrial 3M tape lined strip for strong, self-adhesion to most smooth, finished surfaces
- Suitable for indoor damp locations
- Warranty: Includes a 5-year pro-rated warranty

MAXIMUM LENGTHS BEFORE RE-FEEDING

- 2WDC, 2.5 watts per foot 40'
- 5WDC, 4.4 watts per foot 20'

LAMP

- Offered in multiple Static White Color Temperatures: 2400K, 2700K, 3000K, 3500K & 4000K
- Average life: 50,000 hours

SPECIFICATIONS

- 24VDC
- 2.5 or 4.4
- Sold in 1' increments
- Field-cuttable in 2.4" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)


24VDC, Class 2 wiring

- Home Integration Solutions
- Pure Smart[™] WiZ Pro <u>Power Supplies</u> & <u>Controls</u>
- UNI Driver: Universal Dimming (ELV, TRIAC, 0-10V) ELV & TRIAC <u>Smart Dimmer & Switch</u>
- DALI/DALI-2
- Lutron Hi-Lume/Ecosystem

*In-Wall Mounting and drop ceiling Kits available for select power supplies

APPROVALS

NOMINAL LAMP DATA			ST2A			ST5A						
WATTS PER FOOT			4.4W									
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K		
LUMENS PER FOOT (lm/ft)	284	287	299	343	362	525	531	553	634	669		
LUMENS PER WATT (Im/w)	114	115	120	137	145	119	121	126	144	152		
CRI	92+	92+	92+	92+	92+	92+	92+	92+	92+	92+		






DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA

PURE EDGE PureSmart Lighting

REV 03.25.25





CAN'T STOMP ME OUT

Our Low Voltage Stomp Strip is highly durable, designed to withstand the harsh elements of a job site, and precision engineered to provide superior color rendering up to 94+ CRI. Warm Dim technology (**27D** & **30D**) mimics an incandescent atmosphere by decreasing the color temperature as you dim. Our Warm Dim strips can be dimmed all the way down to a soothing amber hue at 1800K, reminiscent of candlelight along the halogen curve. Stomp Strip is used for our **DIY** (Do-it-Yourself) fixtures and systems. For custom quotes and layout assistance, send your drawings and ideas to our design team: design@PureEdgeLighting.com.

FEATURES & BENEFITS

- · Offered with pin connectors reducing time and labor during installation
- Developed to meet popular demand for resilient performance without sacrificing output, color rendering and efficacy
- Tolerance: Created to resist damage in rigorous environments such as busy commercial jobsites
- Compact LED spacing: Produces uniform light distribution without visible diodes or hot spots when used within a diffused lens
- 4oz Layer of Copper Busbar: Provides superior heat dissipation and less voltage drop equivalent to 14AWG wire
- Premium Coating: Optically Clear Silicone prevents fading over time
- Mounting: Industrial 3M tape lined strip for strong, self-adhesion to most smooth, finished surfaces
- Suitable for indoor damp locations
- Warranty: Includes a 5-year pro-rated warranty

MAXIMUM LENGTHS BEFORE RE-FEEDING

• 5WDC, 4.8 watts per foot - 20'

LAMP

- **27D** dims from 2700K down to 1800K, and **30D** dims from 3000K down to 2000K, resembling Halogen light sources.
- Average life: 50,000 hours

SPECIFICATIONS

- 24VDC
- 4.8 watts per foot
- Sold in 1' increments
- Field-cuttable in 3" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring


- Home Integration Solutions
- UNI Driver: Universal Dimming (ELV, TRIAC, 0-10V) ELV & TRIAC Smart Dimmer & Switch
- DALI/DALI-2
- Lutron Hi-Lume/Ecosystem
- *In-Wall Mounting and drop ceiling Kits available for select power supplies

MAKE IT SMART

Pure Smart[™] WiZ Pro Controls

APPROVALS

NOMINAL LAMP DATA	ST	'5A
WATTS PER FOOT	4.	8W
COLOR TEMPERATURE	27D	30D
LUMENS PER FOOT (Im/ft)	606	631
LUMENS PER WATT (Im/w)	126	131
CRI	94+	94+






PURE EDGE PureSmart Lighting

REV 03.25.25





FEATURES & BENEFITS

- Pro Dim LED Strip provides adaptable dim to warm light with 0.1% Dim to off
- High CRI LEDs, offering superior color rendering and enhanced color
- Offered in 2W & 5W watts per foot
- The 0.4" (10mm) wide strip contains 35 LEDs per foot (7 LEDs per 2.4" Increment): Tight spacing of LEDs produce uniform light distribution without visible diodes or pixelation when used within a diffused lens
- Gold Plated Contacts: Prevent oxidation ensuring longevity of the LEDs
- 4oz Layer of Copper Busbar: Provides superior heat dissipation and less voltage drop equivalent to 14AWG wire
- Premium Coating: Optically Clear Silicone prevents fading over time
- Mounting: Industrial 3M tape lined strip for strong, self-adhesion to most smooth, finished surfaces
- · Applications: Indoor, damp and dry locations
- Warranty: Includes a 5-year pro-rated warranty

MAXIMUM LENGTHS BEFORE RE-FEEDING

- 2WDC, 2.5 watts per foot 40'
- 5WDC, 5 watts per foot 20'
- 7WDC, 7.5 watts per foot 12

LAMP

- Available in 2700K 27KPD (dims down to 1800K) and 3000K (30KPD) that dims down to 2000K
- Linear Dimming Curve
- Designer Grade High CRI 92+ LEDs
- Average life: 50,000 hours

SPECIFICATIONS

- 24VDC, 120-277VAC Input
- 2.5 or 5 watts per foot
- Sold in 1' increments
- Field-cuttable in 2.4" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)


24VDC, Class 2 wiring

- Home Integration Solutions
- <u>Pro Dim Power Supplies & Controls</u>

*In-Wall Mounting Kits available for select Power Supplies

APPROVALS

NOMINAL LAMP DATA							
DESCRIPTION	ST2A	KPD	ST5A KPD				
WATTS PER FOOT	2W (2.5	5 watts)	5W (5 watts)				
COLOR TEMPERATURE	27KPD	30KPD	27KPD	30KPD			
LUMENS PER FOOT (Im/ft)	165	173	426	451			
LUMENS PER WATT (Im/w)	66	69	66	69			
CRI	92+	92+	92+	92+			




24VDC WITH PIN CONNECTORS

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA



REV 03.25.25





CAN'T STOMP ME OUT

Our Low Voltage Tunable White Stomp Strip is highly durable, designed to withstand the harsh elements of a job site, and precision engineered to provide superior color rendering up to 94+ CRI. Tunable White 2000K-6500K **(2K6K)** or 2700K-6500K **(27K6)** grants independent control and adjustment of color temperature and intensity from 2000K (Sunset) through 6500K (Day Light White). Tunable white lighting visually, biologically and emotionally contributes to human interaction with the physical world. Human centric lighting (HCL) builds on this technology bringing the dynamics of natural daylight indoors, and delivering a positive effect on human health, wellbeing and performance. Stomp Strip is used for our **DIY** (Do-it-Yourself) fixtures and systems.

FEATURES & BENEFITS

- · Offered with pin connectors reducing time and labor during installation
- Developed to meet popular demand for resilient performance without sacrificing output, color rendering and efficacy
- Tolerance: Created to resist damage in rigorous environments such as busy commercial jobsites
- Compact LED spacing: Produces uniform light distribution without visible diodes or hot spots when used within a diffused lens
- 4oz Layer of Copper Busbar: Provides superior heat dissipation and less voltage drop equivalent to 14AWG wire
- Premium Coating: Optically Clear Silicone prevents fading over time
- Mounting: Industrial 3M tape lined strip for strong, self-adhesion to most smooth, finished surfaces
- Suitable for indoor damp locations
- Warranty: Includes a 5-year pro-rated warranty

LAMP

- Tunable White: 2000K-6500K (2K6K) and 2700K-6500K (27K6) grants independent control for adjusting color temperature and intensity
- Average life: 50,000 hours

SPECIFICATIONS

- 24VDC
- 2.5 or 4.6 watts per foot
- Sold in 1' increments
- Field-cuttable in 2.4" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

- Home Integration Solutions
- Pure Smart[™] WiZ Pro Power Supplies & Controls
- <u>0-10V</u> Requires two dimmers, one for intensity and one for color temperature
- DMX & Controls
- DALI/DALI-2
- *In-Wall Mounting and drop ceiling Kits available for select power supplies

MAXIMUM LENGTHS BEFORE RE-FEEDING


- 2WDC, 2.5 watts per foot 40'
- 5WDC, 4.6 watts per foot 20'

APPROVALS

Class 2 Wiring, Indoor Damp Location Suitable, RoHS, ETL listed.

NOMINAL LAMP DATA		ST2A 2K6K								ST5A 2K6K								
WATTS PER FOOT		2.5 Watts							4.6 Watts									
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (Im/ft)	152	154	156	158	160	165	180	194	208	368	383	398	413	428	458	491	496	500
LUMENS PER WATT (Im/w)	82	77	78	79	80	82	90	97	115	80	80	83	86	89	95	102	103	109
CRI	91+	91+	91+	94+	93+	92+	92+	91+	91+	91+	91+	91+	94+	93+	92+	92+	91+	91+

NOMINAL LAMP DATA ST2A 27K6									ST5A 27K6						
			2.5 Watts							4.6 Watts					
27K	30K	35K	40K	45K	57K	65K	27K	30K	35K	40K	45K	57K	65K		
164	195	201	206	225	242	231	411	420	436	452	447	443	442		
82	78	80	82	90	97	115	103	91	95	98	97	96	110		
94+	93+	92+	92+	92+	92+	91+	94+	93+	92+	92+	92+	92+	91+		
	164 82	164 195 82 78	164 195 201 82 78 80	2.5 Watts 27K 30K 35K 40K 164 195 201 206 82 78 80 82	2.5 Watts 27K 30K 35K 40K 45K 164 195 201 206 225 82 78 80 82 90	2.5 Watts 27K 30K 35K 40K 45K 57K 164 195 201 206 225 242 82 78 80 82 90 97	2.5 Watts 27K 30K 35K 40K 45K 57K 65K 164 195 201 206 225 242 231 82 78 80 82 90 97 115	2.5 Watts 27K 30K 35K 40K 45K 57K 65K 27K 164 195 201 206 225 242 231 411 82 78 80 82 90 97 115 103	2.5 Watts 27K 30K 35K 40K 45K 57K 65K 27K 30K 164 195 201 206 225 242 231 411 420 82 78 80 82 90 97 115 103 91	2.5 Watts 27K 30K 35K 40K 45K 57K 65K 27K 30K 35K 164 195 201 206 225 242 231 411 420 436 82 78 80 82 90 97 115 103 91 95	2.5 Watts 27K 30K 35K 40K 45K 57K 65K 27K 30K 35K 40K 164 195 201 206 225 242 231 411 420 436 452 82 78 80 82 90 97 115 103 91 95 98	2.5 Watts	2.5 Watts 2.6 Watts 27K 30K 35K 40K 45K 57K 65K 27K 30K 35K 40K 45K 57K 164 195 201 206 225 242 231 411 420 436 452 447 443 82 78 80 82 90 97 115 103 91 95 98 97 96		





DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA







DESCRIPTION

PureEdge RGB Soft Strip provides dynamic color effects with red, green and blue LEDs. Our color-changing LED strip provides bright, continuous light offered in two wattage options of 3 or 5 watts per foot. PureEdge's focus on chromacity quality provides a balanced output across the color gamut, allowing the creation of millions of beautiful colors. The flexible strip is sold in 1 foot increments. RGB Soft Strip can be controlled using a compatible 24 volt DC power supply with an integrated RGB DMX driver. Includes a flexible aluminum heat sink to extend LED life. Both Stomp Strip and Soft Strip are used for our **DIY** (Do-it-Yourself) fixtures and systems.

SPECIFICATIONS

- 24VDC, Class 2
- Power Consumption: 2.6 or 5 watts per foot
- Maximum Lengths Before Re-feeding: SS3- 36', SS5- 20'
- Sold in 1' increments
- Field-cuttable in increments: SS3- 4" SS5- 2.4"
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

MAXIMUM LENGTHS BEFORE RE-FEEDING

SS3, 2.6 watts per foot - 36' SS5, 5 watts per foot - 20'

MOUNTING

Self-adhering SS6 mounts to most smooth finished surfaces with industrial strength 3M tape (provided on back of strip); some unfinished surfaces may require screw-in mounting clips **SS-MCL** (sold separately).

LAMP

- RGB: Dynamic Red, Green, and Blue
- Wattage options: 3 or 5 watts
- 50,000 Hour Lamp Life

ACCESSORIES (SOLD SEPARATELY)

- 24VDC Power Connectors and Jumpers
- Flexible Connectors
- Mounting Straps & Clips

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring


- Home Integration Solutions
- <u>DMX & Controls</u>
- DALI/DALI-2
- *In-Wall Mounting and drop ceiling Kits available for select power supplies

APPLICATIONS

Designed for any Indoor space, including Damp locations. Ideal applications in Residential, Commercial, Retail, and Hospitality environments.

APPROVALS

Class 2 Wiring, Indoor Damp Location Suitable, RoHS, ETL listed.



TRUCOLOR[™] RGB & TUNABLE WHITE LED STRIP

24VDC, 5 CHANNEL CONTROL, WITH PIN CONNECTORS

DESIGNED BY GREGORY KAY | ASSEMBLED IN AMERICA | PATENT PENDING



DESCRIPTION

PureEdge Pure Smart **TruColor**[™] technology uses five channels of tunable LEDs, composed of **RGBTW** red, blue, green, and Tunable White (**1500K-6500K**). With our precision-engineered, proprietary color mixing, we produce one of the widest, most accurate spectrums available, giving our customers access to the warm glow of the sunset (1500K-2400K golden hour) to the pure white light of the mid-day sun (5700K) and everything in between. **TruColor**[™] LED's achieve an average CRI-Color Rendering Index of 94+ and a Duv of +-0.0021 in relation to the blackbody curve at any point on the spectrum of tunable white CCT. Dynamic Color Changing functionality provides millions of possibilities for intricate customization, rich saturated or secondary colors, and unprecedented ease of installation, making **RGBTW** the ideal choice for residential and commercial applications. **TruColor**[™] **RGBTW** adds more than just decorative flexibility; it also helps to support a healthy Circadian Rhythm and well-being. Let **TruColor**[™] transform your space and the people within it. 24VDC Remote Power Supplies required.

FEATURES & BENEFITS

- State-of-the-Art TruColor[™] (1500K-6500K) spectrum offers dynamic effects with RGB and Tunable White
- Optimized for use with WiZ Pro wire control ecosystem and Pure Smart Wi-Fi Room Controller.
- · Offered with pin connectors reducing time and labor during installation
- Dims from full brightness down to 5%, and tuned anywhere from 1500K to 6500K.
- Developed to meet popular demand for resilient performance without sacrificing output, color rendering, CCT range, spectrum accuracy, or efficacy.
- Tolerance: Created to resist damage in rigorous environments such as busy commercial jobsites
- Compact LED spacing: Produces uniform light distribution without visible diodes or hot spots when used within a diffused lens
- Three 1oz Layers of Copper Busbar per foot provides superior heat dissipation and less voltage drop equivalent to 14AWG wire
- Premium Coating: Optically Clear Silicone prevents fading over time
- Mounting: Industrial 3M tape lined strip for strong, self-adhesion to most smooth, finished surfaces
- Warranty: Includes a 5-year pro-rated warranty

REV 03.25.25

LUMEN PERFORMANCE

- TruColor[™] RGBTW Red, Green, and Blue with Tunable White (1500K-6500K)
- S5W5 360lm/ft 5W @3000K
- S5W7 526m/ft 7W @3000K

AVERAGE PERFORMANCE 2000K-5500K

- Average CRI: 94+
- Average DUV: +-0.002
- Average R9: 91, RG: 103, RF:93
- Average Life: 50,000 hours

SPECIFICATIONS

- 24VDC
- S5W5: 5W RGB & 5W Tunable White
 S5W7: 5W RGB & 7W Tunable White
- S5W7: 5W RGB & 7W
- Sold in 1' increments
- Field-cuttable in 3" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

MAXIMUM LENGTHS BEFORE RE-FEEDING

- S5W5 Pure Smart[™] WiZ Pro: 20ft
- S5W7 Pure Smart[™] WiZ Pro: 12ft

REMOTE POWER SUPPLIES, DIMMERS & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring

- Home Integration Solutions
- Pure Smart[™] WiZ Pro Power Supplies
- Pure Smart[™] Wi-Fi Controllers

Features ON/OFF buttons, CCT and brightness control as well as four preset/custom scenes programmable in the WiZ app. Communicates via 2.4GHz Wi-Fi. No Hub needed. Voice control with Goggle Assistant, Alexa, Siri,Shortcuts, and IFTTT


APPLICATIONS

Designed for indoor use only. Ideal applications for residential, commercial, hospitality environments, and general human centric lighting.

APPROVALS

Class 2 Wiring up to 100 watts, Indoor Damp Location, ETL listed, RoHS.

NOMINAL LAMP DATA																		
WATTS PER FOOT	S5W5 5W RGB & 5W TUNABLE WHITE										S5W7 5W RGB & 7W TUNABLE WHITE							
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (Im/ft)	171	256	311	349	360	380	410	288	265	211	352	452	513	526	554	543	319	289
LUMENS PER WATT (Im/w)	63	56	71	82	85	87	98	98	111	63	91	73	86	86	90	93	92	96
CRI	91+	93+	94+	94+	95+	96+	97+	92+	89+	93+	95+	96+	97+	97+	98+	97+	95+	92+
Duv	-0.004	-0.0012	-0.0034	-0.0058	-0.0055	-0.0033	-0.0014	-0.0049	-0.0063	-0.003	0.0002	0.003	0.003	0.003	0.0009	0	0.003	0.003
Rf	91	93	94	94	95	94	94	92	90	92	93	95	95	95	95	94	92	91
Rg	105	101	103	105	104	102	100	102	103	104	100	102	103	103	101	100	102	103
R9	90	90	90	94	97	97	91	81	70	91	90	90	94	95	93	93	79	67
R13	92	94	95	95	94	96	99	90	87	92	95	96	96	97	99	99	91	88
R15	99	99	99	98	97	97	97	89	85	99	99	99	99	99	98	97	90	85
WIZ PRO WATTS/FOOT	2.7	4.55	4.35	4.25	4.25	4.35	4.2	2.95	2.4	3.35	3.85	6.15	5.95	6.15	6.15	5.84	3.45	3






24VDC, 5 CHANNEL CONTROL



REV 03.25.25

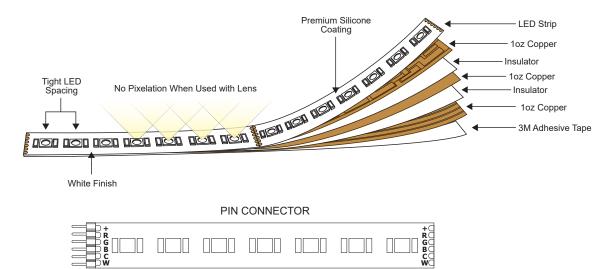


S5W5 WATTS PER FOOT											
LENGTH In feet	RGB Wattage	Tunable White Wattage	Pure Smart™ WiZ Pro Wattage								
1	5	5	5								
2	10	10	10								
3	15	15	15								
4	20	20	20								
5	25	25	25								
6	30	30	30								
7	35	35	35								
8	40	40	40								
9	45	45	45								
10	50	50	50								
11	55	55	55								
12	60	60	60								
13	65	65	65								
14	70	70	70								
15	75	75	75								
16	80	80	80								
17	85	85	85								
18	90	90	90								
19	95	95	95								
20	100	100	100								

	S5W7 WAT	TS PER FOOT	,
LENGTH IN FEET	RGB Wattage	Tunable White Wattage	Pure Smart™ WiZ Pro Wattage
1	5	7	7
2	10	14	14
3	15	21	21
4	20	28	28
5	25	35	35
6	30	42	42
7	35	49	49
8	40	56	56
9	45	63	63
10	50	70	70
11	55	77	77
12	60	84	84

SOFT STRIP, MONOCHROMATIC COLOR 24VDC WITH PIN CONNECTORS

DESIGNED BY GREGORY KAY I ASSEMBLED IN AMERICA | PATENT PENDING

REV 03.25.25

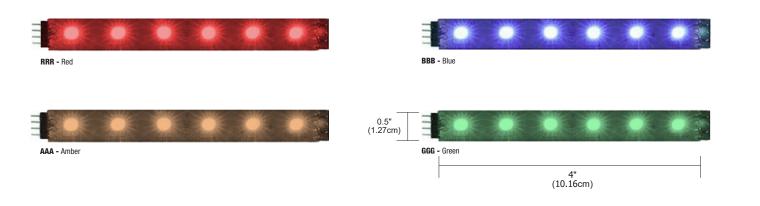

DESCRIPTION

PureEdge Monochromatic Color Soft Strip provides dynamic color effects with monochromatic color LEDs. Offered in Red, Amber, Blue, and Green. The 1/2" wide flexible copper strip, with an optically clear protective coating, is sold in 1ft increments up to 36 ft with cutting increments every 4 inches. Self-adhering, our strip mounts to most smooth finished surfaces with the industrial strength 3M tape on the back. Our Soft Strip is used for our **DIY** (Do-it-Yourself) fixtures and systems. Includes 5 year warranty.

SPECIFICATIONS

- 24VDC, Class 2
- Power Consumption: 2.6 or 5 watts per foot
- · Sold in 1' increments
- Field-cuttable in 4" increments
- Operating temperature: -22°F to 140°F (-30°C to 60°C)

MOUNTING

Industrial 3M tape lines back of strip for self-adhesion to most smooth finished surfaces Additional Connectors, Mounting Straps, and Clips may be needed for some applications (sold separately).

ACCESSORIES (SOLD SEPARATELY)

- 24VDC Power Connectors and Jumpers
- Flexible Connectors
- Mounting Straps & Clips

LAMP

- Monochromatic Red, Amber, Blue, and Green
- 18 LEDs per foot
- 50,000 Hour Lamp Life

MAXIMUM LENGTHS BEFORE RE-FEEDING

- 3WDC, 2.6 watts per foot 36'
- 5WDC, 5 watts per foot 20'

REMOTE POWER SUPPLIES*, DIMMING & CONTROLS (SOLD SEPARATELY)

24VDC, Class 2 wiring


- Home Integration Solutions
- Pure Smart[™] WiZ Pro <u>Power Supplies</u> & <u>Controls</u>
- UNI Driver: Universal Dimming (ELV, TRIAC, 0-10V) ELV & TRIAC <u>Smart Dimmer & Switch</u>
- <u>Lutron</u> Hi-Lume/Ecosystem
- DALI/ DALI 2

*In-Wall Mounting Kits available for select power supplies


APPLICATIONS

Indoor and damp locations. Applications include coves, toe-kicks, under cabinets and shelving, bookcases, drawers, pathways, accent lighting, task lighting, and general illumination.

APPROVALS








LIGHT CHANNEL POWER CONNECTOR

One Female Power Connector is included with each order of channel. For use with Soft or Stomp Strip Only, see page 9 for Lazer Strip components.





FLEXIBLE CONNECTOR

Flexible connectors link two sections of the Light Channel end to end. WAGO 221 Lever Nuts can also be used as jumper connections according to your specific application requirements. For use with Soft or Stomp Strip Only, see page 9 for Lazer Strip components.



www.PureEdgeLighting.com | Phone: 773.770.1195 | 1718 W. Fullerton Ave. Chicago, IL 60614

LIGHT CHANNEL 0.3" DIY SURFACE MOUNT WITH LAZER & STOMP STRIP 24VDC STATIC WHITE, MONOCHROMATIC COLOR, TUNABLE WHITE, RGB & RGBTW

NOMINAL DELIVERED LUMENS

					CLEAF	LENS										
DESCRIPTION			LS3					LS5								
WATTS PER FOOT			3.3 Watts					4.4 Watts								
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	30K	35K	40K						
LUMENS PER FOOT (Im/ft)	189	201	270	271	292	236	250	336	337	364						
LUMENS PER WATT (Im/w)	77	82	109	110	119	72	77	103	104	112						
CRI	90+	95+	95+	85+	85+	90+	95+	95+	85+	85+						
DESCRIPTION		90+ 95+ 95+ 85+ 85+ 90+ 95+ 95+ 85+ 85+ CLEAR LENS LSS - 2K4K														
WATTS PER FOOT					5W (4.6											
COLOR TEMPERATURE	20K		22K	24K	2	7K	30K	35K		40K						
LUMENS PER FOOT (Im/ft)	156		162	168	1	75	181	194		208						
LUMENS PER WATT (Im/w)	34		34	35	3	6	38	40		43						
CRI	91+		91+	91+	9.	+	91+	94+		94+						
					DIFFUE	ED LENS										

PURE

PureSmart Lighting

				DIFFUSI	ED LENS				
		STATIC WHITE				ST	ATIC WHITE/WARM D	MIM	
		3.3 Watts					4.4 Watts		
24K	27K	30K	35K	40K	24K	27K	30K	35K	40K
144	153	206	207	223	181	193	259	260	280
44	46	62	63	68	41	44	59	59	64
90+	95+	95+	85+	85+	90+	95+	95+	85+	85+
	144 44	144 153 44 46	3.3 Watts 24K 27K 30K 144 153 206 44 46 62	3.3 Watts 24K 27K 30K 35K 144 153 206 207 44 46 62 63	STATIC WHITE 3.3 Watts 24K 27K 30K 35K 40K 144 153 206 207 223 44 46 62 63 68	3.3 Watts 24K 27K 30K 35K 40K 24K 144 153 206 207 223 181 44 46 62 63 68 41	STATIC WHITE ST. 3.3 Watts 24K 27K 30K 35K 40K 24K 27K 144 153 206 207 223 181 193 44 46 62 63 68 41 44	STATIC WHITE STATIC WHITE/WARM ID 3.3 Watts 4.4 Watts 24K 27K 30K 35K 40K 24K 27K 30K 144 153 206 207 223 181 193 259 44 46 62 63 68 41 44 59	STATIC WHITE STATIC WHITE/WARM DIM 3.3 Watts

				DIFFUSED LENS											
DESCRIPTION				LS5 - 2K4K											
WATTS PER FOOT		5W (4.6 watts)													
COLOR TEMPERATURE	20K														
LUMENS PER FOOT (Im/ft)	79.0	112.0	145.1	178.1	211.2	172.8	134.5								
LUMENS PER WATT (Im/w)	31.1	35.9	39.3	41.7	43.5	46.8	53.0								
CRI	93.5	83+	92+	92+	95.5	94+	92.6								

						DIFFUS	ED LENS					
DESCRIPTION			STATIC WHITE					STAT	IC WHITE/WARM	DIM		
WATTS PER FOOT			2.5W						5W (4.4 watts)			
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D*	30K	30D*	35K	40K
LUMENS PER FOOT (Im/ft)	120	121	127	145	153	222	225	256	234	267	268	283
LUMENS PER WATT (Im/w)	48	49	51	58	61	51	51	53	53	56	61	64
CRI	90+	95+	95+	85+	85+	90+	95+	92+	95+	92+	85+	85+

						CLEAR FRO	STED LENS					
DESCRIPTION			STATIC WHITE					STAT	TIC WHITE/WARM	DIM		
WATTS PER FOOT			2.5W						5W (4.4 watts)			
COLOR TEMPERATURE	24K	27K	30K	35K	40K	24K	27K	27D*	30K	30D*	35K	40K
LUMENS PER FOOT (Im/ft)	141	142	148	170	179	260	263	300	274	313	315	332
LUMENS PER WATT (Im/w)	56	57	59	68	72	59	60	63	62	65	71	75
CRI	90+	95+	95+	85+	85+	90+	95+	92+	95+	92+	85+	85+

									DIFFUS	ED LENS								
DESCRIPTION					2K6K									2K6K				
WATTS PER FOOT				2	W (2.5 watts	S)							5	5W (4.6 watt	5)			
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (Im/ft)	64									156	162	168	175	181	194	208	210	212
LUMENS PER WATT (Im/w)	35	33	33	33	34	35	90	41	49	34	34	35	36	38	40	43	44	46
CRI	91+	91+	91+	91+	91+	94+	94+	94+	91+	91+	91+	91+	91+	91+	94+	94+	94+	91+

									CLEAR FRO	STED LENS								
DESCRIPTION					2K6K									2K6K				
WATTS PER FOOT				2	W (2.5 watts	S)							5	W (4.6 watts	5)			
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (Im/ft)	75	76	77	79	80	82	89	96	103	182	190	197	205	212	227	243	246	248
LUMENS PER WATT (Im/w)	41	38	39	39	40	41	90	48	57	40	40	41	43	44	47	51	51	54
CRI	91+	91+	91+	91+	91+	94+	94+	94+	91+	91+	91+	91+	91+	91+	94+	94+	94+	91+

							DIFFUS	ED LENS						
DESCRIPTION				27K6							27K6			
WATTS PER FOOT				2W (2.5 watts)							5W (4.6 watts)			
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (Im/ft)	70	83	85	87	95	102	98	218	225	231	238	229	226	219
LUMENS PER WATT (Im/w)	35	33	34	35	38	41	49	55	56	56	55	56	57	56
CRI	93+	93+	94+	94+	94+	93+	93+	93+	93+	94+	94+	94+	93+	93+

							CLEAR FRO	STED LENS						
DESCRIPTION				27K6							27K6			
WATTS PER FOOT				2W (2.5 watts)							5W (4.6 watts)			
COLOR TEMPERATURE	27K	30K	35K	40K	45K	57K	65K	27K	30K	35K	40K	45K	57K	65K
LUMENS PER FOOT (Im/ft)	82	97	99	102	112	120	114	256	263	271	279	268	265	257
LUMENS PER WATT (Im/w)	41	39	40	41	45	48	57	64	66	66	65	65	66	65
CRI	93+	93+	94+	94+	94+	93+	93+	93+	93+	94+	94+	94+	93+	93+

PROJECT

FIXTURE TYPE DATE www.PureEdgeLighting.com | Phone: 773.770.1195 | 1718 W. Fullerton Ave. Chicago, IL 60614





									DIFFUS	ED LENS								
DESCRIPTION			5	W5 5W RGE	3 & 5W TUN	IABLE WHIT	E					5	W7 5W RGE	3 & 7W TUN	ABLE WHIT	E		
WATTS PER FOOT				5	W Maximui	m							7	W Maximui	m			
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (Im/ft)	84	155	161	170	179	190	199	145	130	90	206	216	227	239	255	271	168	146
LUMENS PER WATT (Im/w)	73	34	88	40	42	103	47	116	47	27	54	35	38	39	41	46	49	45
CRI	93	94	95	93	96	96	94	93	93	93	94	96	95	96	96	94	93	93
Duv	-0.0030	-0.0005	-0.0021	-0.0037	-0.0041	-0.0029	-0.0006	-0.0002	0.0000	-0.0030	0.0003	0.0020	0.0002	0.0001	0.0020	0.0025	0.0000	0.0076
Rf	91	93	93	93	93	93	91	91	87	90	93	93	93	93	93	91	91	91
Rg	93	98	101	102	102	100	99	100	96	99	98	101	102	102	100	98	100	99
R9	79	64	69	75	78	76	69	95	95	79	75	68	74	76	76	68	94	95
R13	92	94	95	95	94	96	99	90	87	92	95	96	96	97	99	99	91	88
R15	99	99	99	98	97	97	97	89	85	99	99	99	99	99	98	97	90	85
WATTS/FOOT	2.7	4.55	4.35	4.25	4.25	4.35	4.2	2.95	2.75	3.35	3.85	6.15	5.95	6.15	6.15	5.84	3.45	3.2

									CLEAR FRO	STED LENS								
DESCRIPTION			5	W5 5W RGI	3 & 5W TUN	ABLE WHIT	E					5	W7 5W RGI	3 & 7W TUN	ABLE WHIT	re.		
WATTS PER FOOT				5	W Maximu	n							7	W Maximu	m			
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K	20K	22K	24K	27K	30K	35K	40K	57K	65K
LUMENS PER FOOT (Im/ft)	98	182	189	199	209	223	233	170	153	106	242	253	266	280	299	317	196	171
LUMENS PER WATT (Im/w)	73	40	88	47	49	103	55	116	56	32	63	41	45	46	49	54	57	53
CRI	93	94	95	93	96	96	94	93	93	93	94	96	95	96	96	94	93	93
Duv	-0.0030	-0.0005	-0.0021	-0.0037	-0.0041	-0.0029	-0.0006	-0.0002	0.0000	-0.0030	0.0003	0.0020	0.0002	0.0001	0.0020	0.0025	0.0000	0.0076
Rf	91	93	93	93	93	93	91	91	87	90	93	93	93	93	93	91	91	91
Rg	93	98	101	102	102	100	99	100	96	99	98	101	102	102	100	98	100	99
R9	79	64	69	75	78	76	69	95	95	79	75	68	74	76	76	68	94	95
R13	92	94	95	95	94	96	99	90	87	92	95	96	96	97	99	99	91	88
R15	99	99	99	98	97	97	97	89	85	99	99	99	99	99	98	97	90	85
WATTS/FOOT	2.7	4.55	4.35	4.25	4.25	4.35	4.2	2.95	2.75	3.35	3.85	6.15	5.95	6.15	6.15	5.84	3.45	3.2

www.PureEdgeLighting.com | Phone: 773.770.1195 | 1718 W. Fullerton Ave. Chicago, IL 60614








Indoor 24VDC LED Stomp Strip Compatible Channels: 24VDC LED Stomp Strips can be installed as a single strip or installed within a compatible channel with lens. See Light Channel spec sheets at www.pureedgelighting.com/product/cabinet_lighting_shelf_lighting/surface_mount.


C Clear Lens D Diffused Lens Linear Frost Lens G Gel Color Filter Suitable

 $\textbf{SURFACE MOUNT LIGHT CHANNELS:} Recommended applications^{\star} - Cove, pathway, toe-kick, undercabinet, and shelves$

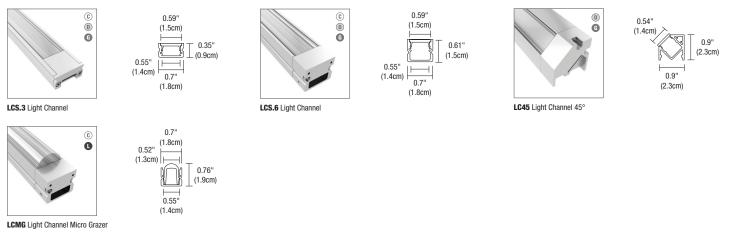


RECESSED LIGHT CHANNELS: Recommended applications* (Recessed into drywall or wood)** — Coves, pathways, toe-kicks, undercabinets, and shelves





0

TTL1.6 TruLine Trim 1.6




LCMW.6 Light Channel Millwork

LGWW.O LIGHT GHANNEI WINW



TM-30-15 DATA: The data below is for LS3 and LS5 bare Lazer Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 90.1 | Rg: 99.9 Color Vector Graphic




		GRAPHIC SHIFTS %		
HUE BIN	Rf	CHROMA	HUE	
1	87.8	-5.8%	-0.5%	
2	88.6	-4.7%	3.9%	
3	85.2	-1.1%	6.5%	
4	92.1	1.4%	3.8%	
5	94.6	3.0%	3.2%	
6	92.7	4.5%	0.4%	
7	91.3	0.7%	-4.7%	
8	95.7	0.3%	-2.3%	
9	94.8	-2.2%	-0.8%	
10	93.1	-2.5%	2.2%	
11	91.7	1.0%	4.7%	
12	88.4	3.0%	0.4%	
13	87.6	4.3%	-9.4%	
14	81.0	3.1%	-11.6%	
15	89.8	-0.8%	-6.7%	
16	83.9	-4.9%	-9.7%	

3000K | Rf: 90.7 | Rg: 99.7 Color Vector Graphic

Test Reference


			GRAPHIC SHIFTS %		
	HUE BIN	Rf	CHROMA	HUE	
-	1	89.6	-5.1%	-0.6%	
	2	90.8	-3.7%	2.9%	
	3	87.7	-1.3%	5.6%	
	4	92.7	-0.1%	3.1%	
	5	94.3	1.7%	3.1%	
	6	94.2	3.0%	-0.3%	
	7	92.6	-0.7%	-3.4%	
	8	97.1	-0.3%	-1.4%	
-	9	94.6	-2.4%	1.0%	
	10	90.4	-2.1%	4.8%	
	11	87.6	0.5%	7.9%	
	12	88.6	4.7%	2.0%	
	13	91.4	3.6%	-4.1%	
	14	86.8	4.6%	-8.4%	
	15	91.0	-0.7%	-4.9%	
	16	84.1	-2.5%	-11.0%	

2700K | Rf: 92.4 | Rg: 98.0 Color Vector Graphic



GRAPHIC SHIFTS %			
HUE BIN	Rf	CHROMA	HUE
1	90.6	-4.5%	-0.4%
2	92.6	-3.4%	1.4%
3	91.9	-2.2%	3.0%
4	94.6	-2.3%	1.2%
5	95.3	-1.1%	2.6%
6	96.9	0.4%	0.9%
7	94.7	-2.2%	-1.1%
8	97.9	-0.5%	0.7%
9	95.0	-2.1%	1.4%
10	91.7	-1.5%	4.4%
11	90.2	0.4%	6.4%
12	90.5	3.6%	0.5%
13	92.4	2.0%	-4.6%
14	88.7	2.9%	-7.5%
15	92.4	-1.6%	-3.4%
16	86.4	-2.6%	-9.0%

3500K | Rf: 92.5 | Rg: 101.2 Color Vector Graphic



		GRAPHIC SHIFTS %		
HUE BIN	Rf	CHROMA	HUE	
1	94.2	-2.3%	-0.8%	
2	95.6	-1.8%	0.9%	
3	92.1	-0.7%	3.3%	
4	93.8	-0.5%	2.5%	
5	93.2	-0.6%	2.3%	
6	95.0	2.6%	0.5%	
7	96.2	-0.2%	-1.0%	
8	97.3	-0.1%	-1.4%	
9	95.1	-1.7%	1.9%	
10	89.5	-2.4%	5.7%	
11	85.0	1.2%	8.4%	
12	89.8	4.8%	4.1%	
13	94.8	3.0%	-0.1%	
14	90.9	5.9%	-3.3%	
15	91.8	2.1%	-4.3%	
16	89.1	1.1%	-6.2%	


PROJECT	
TICOLOI	




TM-30-15 DATA: The data below is for bare LED Static White Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2400K | Rf: 84.5 | Rg: 94.4

Color Vector Graphic




3000K | Rf: 88.1 | Rg: 99.7 Color Vector Graphic




			GRAPHIC	GRAPHIC SHIFTS %		
	HUE BIN	Rf	CHROMA	HUE		
-	1	92.5	-3.1%	0.3%		
	2	93.3	-2.3%	1.9%		
	3	90.9	-0.8%	3.9%		
	4	94.3	-1.1%	1.4%		
	5	92.5	-2.6%	1.5%		
	6	96.4	1.2%	-0.3%		
	7	92.6	-2.5%	-0.0%		
	8	96.9	-1.4%	0.2%		
-	9	92.3	-1.8%	4.3%		
	10	86.6	-0.7%	7.0%		
	11	86.5	2.4%	8.2%		
	12	89.8	5.9%	1.7%		
	13	93.9	2.6%	-2.7%		
	14	89.4	5.1%	-5.8%		
	15	90.1	-0.1%	-4.7%		
	16	86.5	0.3%	-9.7%		

4000K | Rf: 87.6 | Rg: 96.8 Color Vector Graphic




			GRAPHIC SHIFTS %		
	HUE BIN	Rf	CHROMA	HUE	
Ì	1	88.9	-2.4%	2.5%	
Ì	2	93.3	-0.4%	0.8%	
- (3	94.8	-1.0%	-0.6%	
[4	87.9	-4.9%	-3.6%	
	5	85.3	-9.4%	-2.6%	
	6	90.2	-6.0%	0.2%	
	7	85.3	-7.6%	4.6%	
	8	83.7	-4.1%	8.2%	
	9	79.5	-1.1%	13.8%	
	10	78.6	1.5%	12.1%	
	11	83.5	6.4%	7.8%	
[12	90.9	3.6%	-1.1%	
[13	88.3	1.7%	-6.3%	
	14	91.9	-0.4%	-2.2%	
Ì	15	84.5	-0.9%	-5.5%	
	16	84.7	-1.1%	-4.4%	

2700K | Rf: 87.7 | Rg: 96.1 Color Vector Graphic



			GRAPHIC SHIFTS %		
	HUE BIN	Rf	CHROMA	HUE	
_	1	88.0	-4.3%	2.6%	
	2	91.6	-2.4%	2.0%	
	3	93.7	-1.4%	1.9%	
	4	88.9	-5.6%	-3.1%	
	5	92.3	-5.5%	-0.5%	
	6	92.9	-3.5%	0.1%	
	7	84.5	-7.5%	4.6%	
	8	90.8	-3.0%	4.4%	
	9	84.5	-1.3%	8.3%	
	10	83.9	2.0%	9.8%	
	11	87.2	5.3%	7.1%	
	12	89.2	5.4%	-2.6%	
	13	88.7	0.3%	-7.8%	
	14	86.8	1.7%	-9.3%	
	15	87.6	-5.4%	-1.3%	
	16	83.6	-3.3%	-9.5%	

3500K | Rf: 86.1 | Rg: 95.5 Color Vector Graphic



			GRAPHIC SHIFTS %		
	HUE BIN	Rf	CHROMA	HUE	
	1	90.8	-3.8%	0.3%	
	2	92.3	-2.8%	2.1%	
	3	89.7	-1.0%	4.3%	
	4	92.6	-1.4%	1.7%	
	5	91.8	-3.1%	1.3%	
	6	96.2	0.8%	-0.4%	
	7	92.9	-3.2%	0.2%	
	8	94.3	-2.5%	1.5%	
	9	90.4	-2.5%	5.2%	
10.00	10	84.3	-1.4%	9.5%	
	11	83.1	3.5%	9.8%	
	12	88.2	4.8%	3.4%	
	13	94.0	2.7%	-2.0%	
	14	88.7	5.9%	-5.8%	
	15	88.7	0.7%	-5.9%	
	16	86.8	-0.7%	-6.7%	


FIXTURE TYPE



TM-30-15 DATA: The data below is for Tunable White bare LED Strip. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2000K ONLY (2K6K/27K6) | Rf: 90.6 | Rg: 98.5

Color Vector Graphic




4000K ONLY (2K6K/27K6) | Rf: 86.4 | Rg: 96.1

Color Vector Graphic

			GRAPHIC	SHIFTS %
	HUE BIN	Rf	CHROMA	HUE
	1	86.5	-5.5%	1.3%
	2	90.4	-3.0%	2.3%
	3	89.8	-2.1%	3.6%
	4	89.1	-3.4%	0.4%
	5	88.5	-5.9%	0.1%
	6	93.6	-3.0%	-0.4%
	7	88.9	-6.2%	1.7%
	8	87.3	-5.0%	4.9%
	9	82.4	-3.6%	11.3%
	10	77.4	-1.8%	12.7%
	11	79.8	4.9%	11.4%
	12	88.7	4.4%	2.7%
	13	88.7	4.0%	-5.1%
	14	91.2	2.2%	-3.8%
	15	82.7	-0.1%	-9.2%
Test Reference	16	82.8	-2.2%	-7.6%

3000K (2K6K/27K6) | Rf: 90.5 | Rg: 100.7

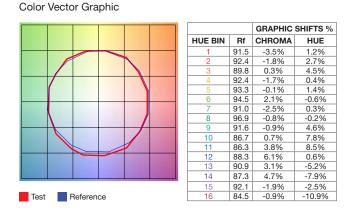


www.PureEdgeLighting.com | Phone: 773.770.1195 | 1718 W. Fullerton Ave. Chicago, IL 60614




TM-30-15 DATA: The data below is for LS3 and LS5 bare Lazer Strips. Consistent color temperatures throughout a single strip and among multiple strips is possible through a 3 phase binning process in which each order is inspected with a color meter to ensure uniformity.

2000K (TruColor[™] RGBTW)




2700K (TruColor[™] RGBTW)




4000K (TruColor[™] RGBTW)


2200K (TruColor[™] RGBTW)




3000K (TruColor[™] RGBTW)




5700K (TruColor[™] RGBTW)




2400K (TruColor[™] RGBTW)



3500K (TruColor[™] RGBTW)



6500K (TruColor[™] RGBTW)



PROJECT

 FIXTURE TYPE
 DATE

 www.PureEdgeLighting.com
 Phone: 773.770.1195
 1718
 V. Fullerton Ave. Chicago, IL 60614

 PureEdge Lighting reserves the right to modify this specification without prior notice
 DATE