

PURE SMART TRUCOLOR™ A21-E26-13W-RGBTW

120V, 13 WATT, WI-FI ENABLED SMART LAMP





REV 11.20.23



DESCRIPTION

The Pure Smart Wi-Fi enabled A21 smart lamp uses TruColor™ RGBTW Technology – With 5 channels (Red, Green, and Blue + Tunable White) of proprietary color mixing we create over 16 million vivid saturated colors and pastels along with 85,000 tunable white tones. Promote a healthy Circadian rhythm and experience the beauty of natural white in its purest form. Tunable White ranges from 1500K-6500K. Bring out the best of your world by saturating it in 97 CRI light with TruColor™ Technology. Dial in just the right ambiance for any occasion just by changing the preset color mode. Harness the beauty of the sunset and paint your living room with the amber glow of the golden hour. Experience life in TruColor™.

- Controls Easily control from anywhere with the WiZ app or with the WiZ Pro Dashboard on your computer. At home, experience the convenience of voice control with Alexa or Google Home. Take control to the next level by utilizing the available Pure Smart wall controls.
- Wall Controller On/Off, Dimming, CCT selection, and scene control.
 Must use Pure Smart CWW-TW-SCENE-WH wall controller or Wall/Table
 Battery Remote Controller CWR-TW-SCENE-WH (Sold Separately).
- WiZ SpaceSense[™] Wi-Fi sensing technology that detects motion from disruptions in the Wi-Fi signal and triggers the lights to turn on or off when you enter or exit the room.
- Schedule & Automation Customizable schedules, circadian rhythm, vacation mode, energy monitoring, and predictive maintenance.
- Wi-Fi/Bluetooth Easily setup over Wi-Fi or Bluetooth. No hub required.
- Title 20 Compliances Meets Title 20 regulations and standards for efficiency. Suitable for use in California.
- 3rd party log-in and cloud security provide a safe and protected connection. WiZ does not store nor share any personal information.

For custom quotes and layout assistance, send your drawings and ideas to our design team: design@PureEdgeLighting.com.

SMART DIMMING & CONTROLS (SOLD SEPARATELY)

- Pure Smart™ 5 Channel Wi-Fi Controller
- Pure Smart™ Battery Remote Wi-Fi Controller


Features an ON/OFF buttons, CCT and brightness control rockers, and preset scene selections. Wi-Fi, 2.4 GHz.

SPECIFICATIONS

APP	WiZ Mobile App
WI-FI/BLUETOOTH	Easily setup over Wi-Fi or Bluetooth. No hub required. 2.4GHz 802.11b/g/n WPA3 Personal
BULB SHAPE	A21
BASE TYPE	E26
WATTAGE	13 Watts
WATTAGE EQUIVALENCY	100 watt Incandescent
INPUT VOLTAGE	120 Volt
FREQUENCY	60 Hz
COLOR TEMPERATURE	RGBTW: Red, Blue, Green, Tunable White from 1500K-6500K
LUMENS	1262 Lumens at 3000K
CRI	97 CRI at 3000K
EFFICACY	107 lumens per watt at 3000K
DUV	.00028 average across 2000K-5500K
RF	91.8 average across 2000K-5500K
RG	102 average across 2000K-5500K
R9	92 average across 2000K-5500K
SCHEDULES & AUTOMATION	Customizable schedules, circadian rhythm, vacation mode, energy monitoring, and predictive maintenance
LOCATION	Indoor, damp location. Suitable for use in enclosed and open fixtures
MATERIAL	Polycarbonate
OPTICAL	320 degrees through a frosted lens
L70 LIFESPAN	30,000 Hours
TITLE 20 COMPLIANCE	Meets Title 20 regulations and standards for efficiency. Suitable for use in California
WARRANTY	3 years/30,000 hours

APPLICATIONS

Ideal applications in residential, commercial, retail, and hospitality environments. For use with E26 Medium Base Sockets.



PROJECT FIXTURE TYPE DATE






REV 11.20.23

2

NOMINAL LAMP DATA

						,					
DESCRIPTION	A21 LAMP										
WATTS	13W										
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K		
LUMENS (Im)	553	623	817	1029	1262	1436	1609	1321	1122		
LUMENS PER WATT (Im/w)	56	62	76	91	107	122	135	121	109		
CRI	94	92	95	96	97	98	97	96	94		
Duv	0.0003	0.0015	-0.0003	-0.0011	-0.0017	-0.0004	-0.0008	-0.0042	-0.0037		
Rf	91	89	94	94	94	93	92	92	92		
Rg	98	97	101	102	102	101	100	104	104		
R9	93	97	94	93	90	92	90	91	80		
R13	92	91	94	96	98	98	99	95	94		
R15	99	96	98	99	99	98	97	93	90		
WATTS	9.9	10.1	10.8	11.3	11.8	11.8	11.9	10.9	10.3		

R1-R15 CRI CHART @ 3000K 97 CRI

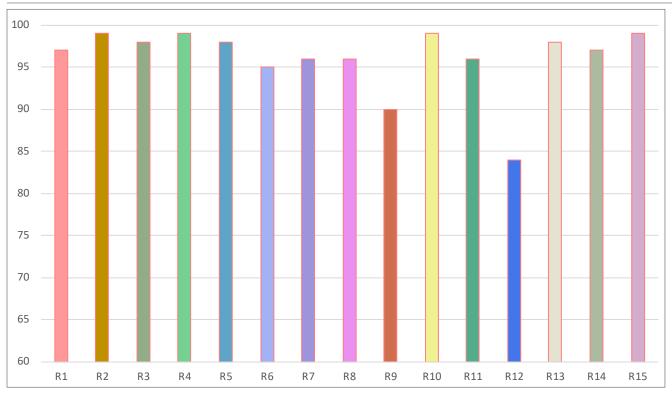







REV 11:20:23

TM-30-15 DATA: The data below is for Pure Smart TruColor™ RGBTW Lamps.


2000K (TruColor™ RGBTW) View Angle: 2 Deg



2200K (TruColor™ RGBTW) View Angle: 2 Deg




2400K (TruColor™ RGBTW) View Angle: 2 Deg




2700K (TruColor™ RGBTW)

View Angle: 2 Deg




3000K (TruColor™ RGBTW)

View Angle: 2 Deg




3500K (TruColor™ RGBTW)

View Angle: 2 Deg




4000K (TruColor™ RGBTW)

View Angle: 2 Deg




5700K (TruColor™ RGBTW)

View Angle: 2 Deg



6500K (TruColor™ RGBTW) View Angle: 2 Deg



PROJECT FIXTURE TYPE DATE