

PURE SMART DISK 12 INCH TRUCOLOR™ RGBTW 120V. 18 WATT WI-FI ENABLED CEILING FLUSH/WALL MOUNT FIXTURE





REV 02.20.24



DESCRIPTION

Pure Smart Disk is a Wi-Fi enabled, 12-inch round ceiling flush mount. The integral, 18-watt Wi-Fi-enabled WiZ Pro Driver offers seamless connectivity and control, bringing convenience and efficiency to installation and setup. The comprehensive suite of features includes CCT selection, custom color mixing, dimming, scene creation, grouping, zoning, scheduling, and personalized circadian rhythm settings. Pure Smart TruColor™ technology uses five channels of tunable LEDs, composed of RGBTW red, blue, green, and Tunable White (1500K-6500K). With our precision-engineered, proprietary color mixing, we produce one of the widest, most accurate spectrums available, giving our customers access to the warm glow of the sunset (1500K-2400K golden hour) to the pure white light of the midday sun (5700K) and everything in between. TruColor™ LED's achieve an average CRI-Color Rendering Index of 93+ and a Duv of +-.0028 in relation to the blackbody curve at any point on the spectrum of tunable white CCT. Dynamic Color Changing functionality provides millions of possibilities for intricate customization, rich saturated secondary colors, and unprecedented ease of installation, making RGBTW the ideal choice for residential and commercial applications. TruColor™ RGBTW adds more than just decorative flexibility; it also helps to support a healthy Circadian Rhythm and well-being. Let **TruColor™** transform your space and the people within it. TruColor™ RGBTW is optimized for control with WiZ Pro Wi-Fi based smart control system.

- Controls Easily control from anywhere with the WiZ app or with the WiZ Pro Dashboard on your computer. At home, experience the convenience of voice control with Alexa or Google Home. Take control to the next level by utilizing the available Pure Smart wall controls.
- Wall Controller On/Off, Dimming, CCT selection, and scene control.
 Must use Pure Smart CWW-TW-SCENE-WH wall controller or Wall/Table
 Battery Remote Controller CWR-TW-SCENE-WH (Sold Separately).
- WiZ SpaceSense™ Wi-Fi sensing technology that detects motion from disruptions in the Wi-Fi signal and triggers the lights to turn on or off when you enter or exit the room.
- Schedule & Automation Customizable schedules, circadian rhythm, vacation mode, energy monitoring, and predictive maintenance.
- Wi-Fi/Bluetooth Easily setup over Wi-Fi or Bluetooth. No hub required.
- Title 20 Compliances Meets Title 20 regulations and standards for efficiency. Suitable for use in California.
- 3rd party log-in and cloud security provide a safe and protected connection. WiZ does not store nor share any personal information.

For custom quotes and layout assistance, send your drawings and ideas to our design team: design@PureEdgeLighting.com.

SPECIFICATIONS

APP	WiZ Mobile App
WI-FI/BLUETOOTH	Easily setup over Wi-Fi or Bluetooth. No hub required. 2.4GHz 802.11b/g/n WPA3 Personal
WATTAGE	18 Watts
INPUT VOLTAGE	120 Volt
FREQUENCY	60 Hz
COLOR TEMPERATURE	RGBTW: Red, Blue, Green, Tunable White from 1500K-6500K
LUMENS	834 lumens at 3000K
CRI	93+ CRI at 3000K
EFFICACY	94 lumens per watt at 3000K
DUV	0.004 average across 2000K-5500K
RF	91 average across 2000K-5500K
RG	103 average across 2000K-5500K
R9	67 average across 2000K-5500K
SCHEDULES & AUTOMATION	Customizable schedules, circadian rhythm, vacation mode, energy monitoring, and predictive maintenance
LOCATION	Indoor, damp location.
MATERIAL	Polycarbonate
OPTICAL	120 degrees through a frosted lens
L70 LIFESPAN	30,000 Hours
TITLE 20 COMPLIANCE	Meets Title 20 regulations and standards for efficiency. Suitable for use in California
WARRANTY	3 years/30,000 hours

SMART DIMMING & CONTROLS (SOLD SEPARATELY)

- Pure Smart[™] 5 Channel Wi-Fi Controller
- Pure Smart™ Battery Remote Wi-Fi Controller

Features an ON/OFF buttons, CCT and brightness control rockers, and preset scene selections. Wi-Fi, 2.4 GHz.

APPLICATIONS

Applications, indoor for residential, commercial, retail, and hospitality.

	Product		Type		W	attage		Po	wer			Color Temperature		Fir	nish	
	DK	-	12R	_	1	8W	_	12	20V	-		TC	_	W	/Н	
Ì	DK Disk Ceiling or Wall Mount	12R	12 Inch Round	,	18W	18 Watts		120V	120 Volt		TC	TruColor™ RGB & Tunable White (1500K-6500K)		WH	White	

PROJECT FIXTURE TYPE DATE



PURE SMART DISK 12 INCH TRUCOLOR™ RGBTW 120V, 18 WATT WI-FI ENABLED CEILING FLUSH/WALL MOUNT FIXTURE






REV 02.20.24

2

NOMINAL DELIVERED LUMENS

DESCRIPTION	DISK											
WATTS	18W											
COLOR TEMPERATURE	20K	22K	24K	27K	30K	35K	40K	57K	65K			
LUMENS (Im)	214	546	660	742	834	966	603	203	119			
LUMENS PER WATT (Im/w)	89	64	67	71	74	78	76	78	54			
CRI	89	91	92	93	94	95	95	95	95			
Duv	0.0054	0.0042	0.005	0.0057	0.0049	0.0025	0.0032	0.002	0.0067			
Rf	67	55	59	64	65	62	65	93	97			
Rg	86	89	90	91	92	93	92	93	92			
R9	106	103	103	104	103	101	101	103	102			
R13	92	98	97	97	98	99	99	93	93			
R15	95	90	92	94	94	93	94	96	94			
WATTS	2.4	8.5	9.9	10.5	11.3	12.4	7.9	2.6	2.2			

R1-R15 CRI CHART @ 3000K CRI 96+

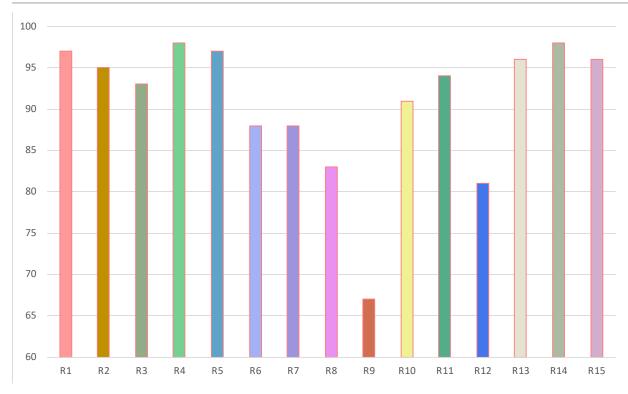




PURE SMART DISK 12 INCH TRUCOLOR™ RGBTW 120V, 18 WATT WI-FI ENABLED CEILING FLUSH/WALL MOUNT FIXTURE





REV 02.20.24

NETWORK TOPOLOGY

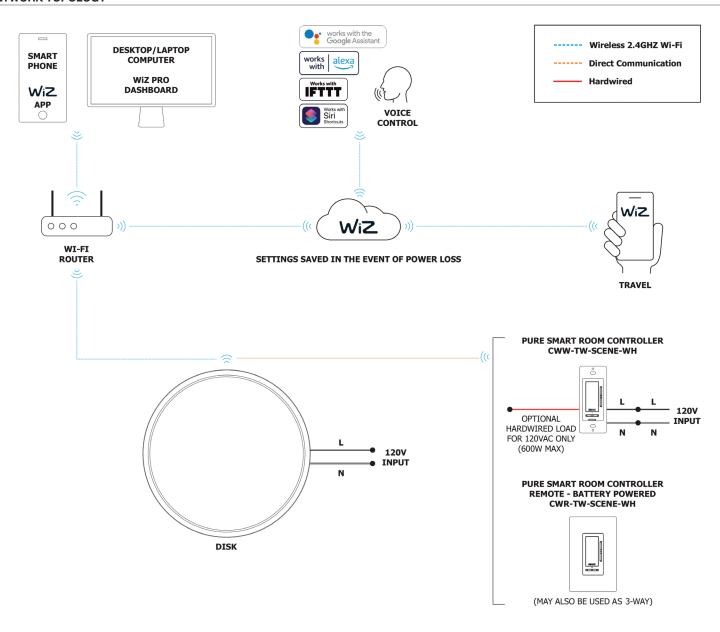







REV 02.20.24

TM-30-15 DATA: The data below is for Pure Smart TruColor™ RGBTW Lamps.


2000K (TruColor™ RGBTW)



2200K (TruColor™ RGBTW) View Angle: 2 Deg




2400K (TruColor™ RGBTW) View Angle: 2 Deg




2700K (TruColor™ RGBTW)






3000K (TruColor™ RGBTW)






3500K (TruColor™ RGBTW)

View Angle: 2 Deg




4000K (TruColor™ RGBTW)






5700K (TruColor™ RGBTW)





6500K (TruColor™ RGBTW)

View Angle: 2 Deg



PROJECT FIXTURE TYPE DATE