




SLICK LINEAR LED OUTDOOR

24VDC, 3 WATTS PER FT, STATIC WHITE AND STATIC COLOR



REV 08.19.21

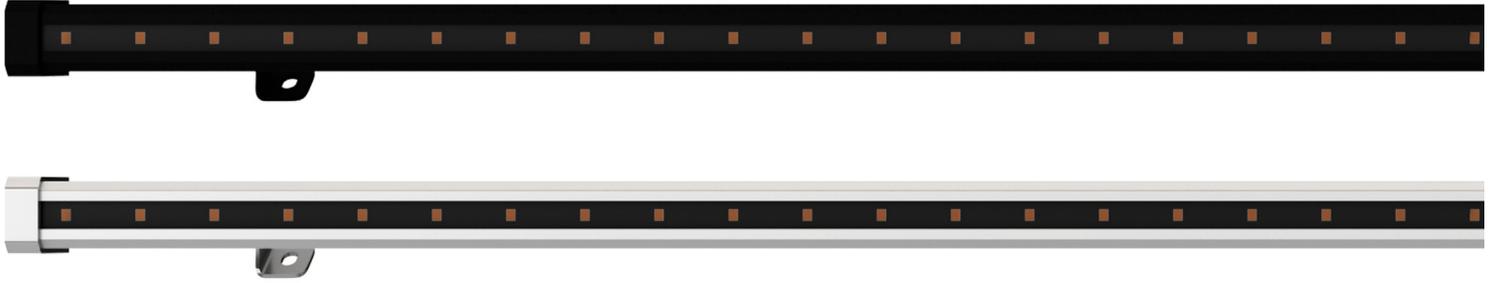

DESCRIPTION

The rugged design of the Slick Linear Static White and Static Colors lighting system is ready for the harsh environments of mother nature. The Slick Linear is a clean budget-minded fixture at less than 1 inch wide will fit in small spaces. Can be Ceiling, floor, or wall-mounted with 3 watts of power per foot and 120 degree beam spread of LED light. The Slick Linear is manufactured with adjustable mounting clips that allow the fixture to be mounted in various outdoor applications. Power the Slick Linear IP66 Rated fixture with PureEdge's Wet Rated Universal Dimming (**ELV, 0-10, TRIAC**) Power Supply or from a remote indoor location (Sold Separately). Multiple fixtures can be Ganged together, up to 100 watts before re-feeding.

ELECTRICAL

- Input Voltage: 24VDC
- Universal Power Supply 120/277VAC-24VDC, Sold Separately SKU: **PSB-96W-UNI-24VDC-W**
- Class 2 Power Supply
- Power Consumption of 3 watts per foot
- LED's/ft: 15
- Order in 4 Wattage/Length options, and gang multiple fixtures together, up to 100 watts before re-feeding.
- Cable Connector: **OC-CFX-2CON-(12IN or 96IN)-W** Cord conductors can be ordered to gang multiple fixtures together for a watertight connection
- Dimming: Universal (**ELV, 0-10, TRIAC**)

FINISHES



Black Powder Coat **BK**
Satin Aluminum **SA**

FEATURES & BENEFITS

- 4 Standard Lengths: 24" or 48" at 3W per foot
- Static White Color Temperature Options: 2200K / 2700K / 3000K / 4000K or 5000K
- Static Color Options: Red, Green, Blue, Amber
- Adjustable Mounting Clips: Innovative mounting clips are attached to Ground Level, Ceiling, or Wall mounting options, for Wall Grazing, Wall Washing, and general outdoor lighting applications
- Easy Installation: Push-In Water Tight Barrel Connectors
- 120 Degree Beam Spread
- 2 Finish Options: Silver or Black Powder Coated Finish

LUMEN PERFORMANCE DATA

Based on 3000K 24" at 6 Watts

- Lumen: 426.3
- Efficiency: 71.5 LM/W
- CRI: 83

PHYSICAL

- Material: Low Copper Aluminum Die Casting with High Pure Aluminum Alloy Extrusion, High Weather Resistant Outdoor Powder Coated Finish, Tempered Optical Glass Diffuser 1.25" thick LED COB
- Sizes: **6W24** (24" x 0.9" x 1.3) or **14W48** (48" x 0.9" x 1.3)
- Operating Temperature: -4F to 113F
- Average LED Life: 50,000 Hours

COMPLIANCE

- Class 2 Power Supply
- ETL Listed
- IP66 Wet Rated

WARRANTY

5 Year Pro-rated Warranty from Time of Purchase

APPLICATIONS



Outdoor wet location. Designed for wall, floor or ceiling mounted applications. Ideal environments include sculptures, public art installations, Pathways, Accent Walls, Restaurant Patios and Hotels. IP66 Rated.

System	Wattage & Length	Beam Spread Lens	Color Temperature	Finish
SLLO-24V	14W48	120	30K	SA
SLLO-24V Slick Linear Outdoor 24 Volt	6W24 6 Watts, 24" 14W48 14 Watts 48"	120 120° Lens	22K 2200K Amber White 27K 2700K Incandescent White 30K 3000K Warm White 40K 4000K Cool White 50K 5000K Daylight White RRR Red BBB Blue GGG Green AAA Amber	BK Powder Coated Black SA Satin Aluminum

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

SLICK LINEAR LED OUTDOOR

24VDC, 3 WATTS PER FT, STATIC WHITE AND STATIC COLOR

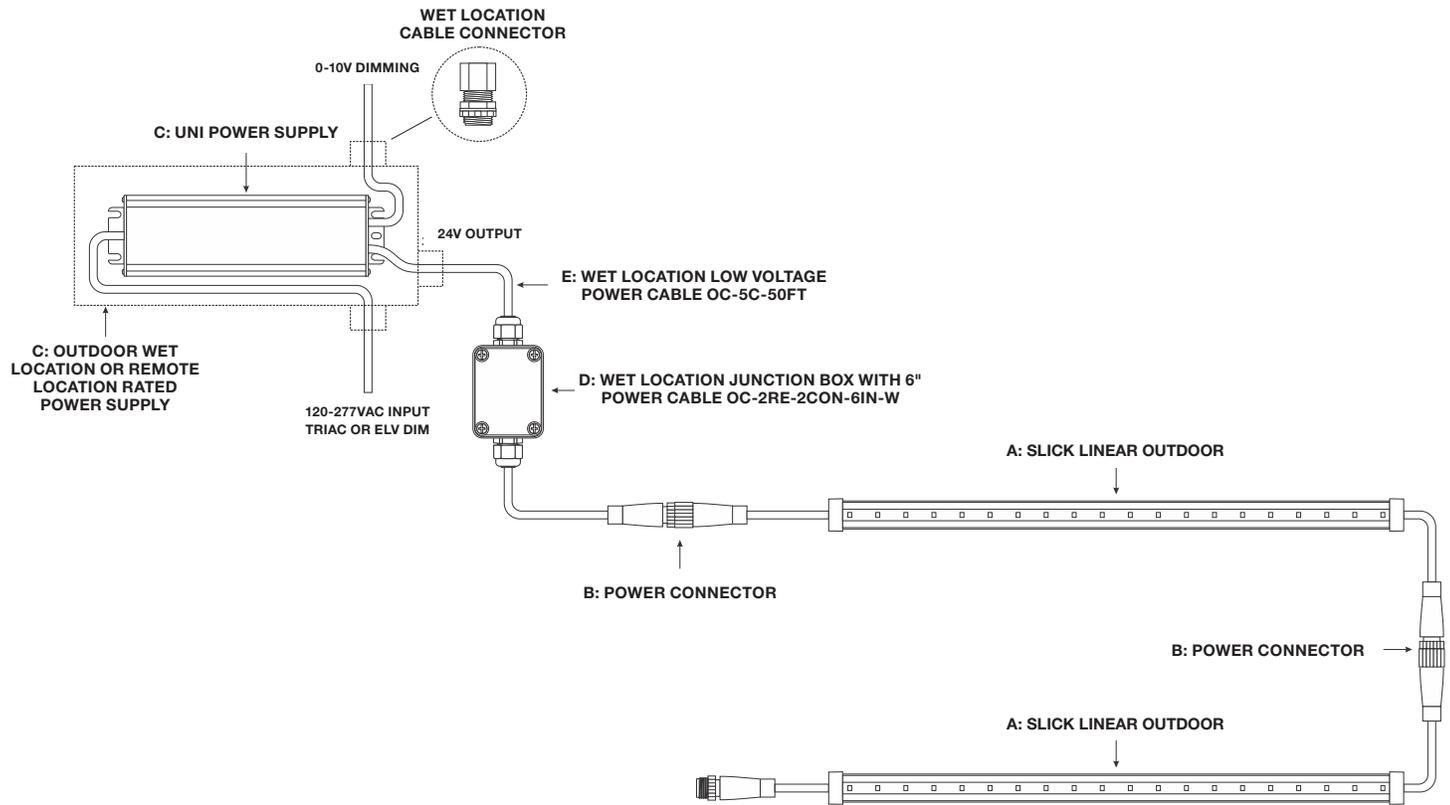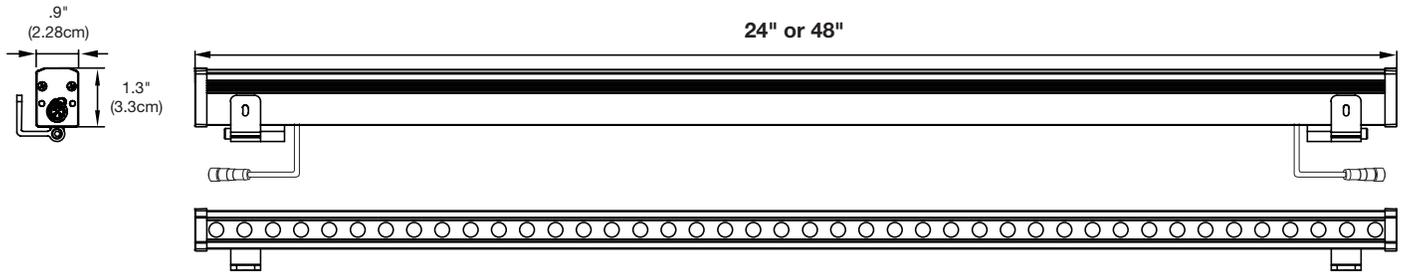

A. SLICK LINEAR OUTDOOR RGB

The rugged design of the Slick Linear is ready for the harshest of environments.

B. POWER CONNECTOR

Power Connector connects the LED Flex Neon to remote power supply. Comes with connects to each end of fixture

C. UNI DRIVER POWER SUPPLY

Outdoor-rated Universal power supply may be dimmed with ELV, Triac or 0-10. Input voltage 120/277v, Output 24VDC sold separately.

D. WET RATED OUTDOOR JUNCTION BOX ENCLOSURE

This watertight Junction Box may be ordered with a 6" Flexible Cable providing easy, safe, and reliable connections for 24V low voltage fixtures.

E. OUTDOOR CABLE

5 Conductor, 14 Gage Cable is a suitable for transmitting 24VD power, control, and switching to outdoor and wet location fixtures (Sold Separately, See page 3).

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------



SLICK LINEAR LED OUTDOOR

24VDC, 3 WATTS PER FT, STATIC WHITE AND STATIC COLOR



REV 08.19.21

Components: Components for the Slick Linear Fixture

DIRECT BURIAL LOCATION CABLE ORDER PER FOOT


Our Direct Burial, 2 Conductor Plus ground, 12 Gauge Cable is a durable and adaptable cable suitable for transmitting power, control, and switching in outdoor wet and in ground environments. Keep within 60 ft between fixture and power supply. Cable sold by the foot, simply specify the length needed by the foot.



Product	Gauge	Cable
DB	12G	2C
DB Direct Burial	12G 12 Gauge	2C 2 Conductor

WET AND DAMP LOCATION CABLE ORDER PER FOOT



Our Wet Location, 5 Conductor, 14 Gauge Cable is a durable and adaptable cable suitable for transmitting power, control, and switching in indoor and outdoor wet and damp environments. Cable sold by the foot, simply specify the length needed by the foot. Keep within 50 ft between fixture and power supply. Cable sold by the foot, simply specify the length needed by the foot.

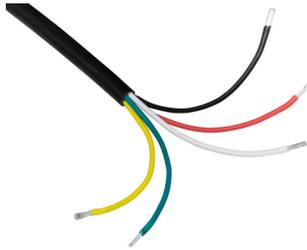

Product	Gauge	Cable
OC	14G	5C
OC Outdoor Cable	14G 14 Gauge	5C 5 Conductor

WET LOCATION JUNCTION BOX

Wet-rated low voltage Splice Box with connectors.

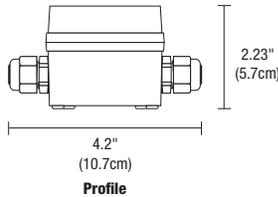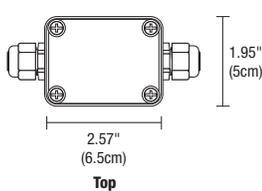

Product	Type	Option
2RE	JBOX	W
2RE 2" Rectangle	JBOX Junction Box	W Wet Location

WET LOCATION JUNCTION BOX WITH 6" POWER CABLE


This watertight, multi-fixture Junction Box is especially designed for lighting in wet and damp locations. This Junction Box comes standard with a 6" Flexible Cable providing easy, safe, and reliable connections for 24V low voltage luminaires. This box is approved for indoor and outdoor usage and complies with all the requirements of UL1241 and the National Electric Code.



Product	Canopy	Product	Size	Option
OC	2RE	2CON	6IN	W
OC Outdoor Cable	2RE 2" Rectangle	2CON 2 Pin Connector	6IN 6"	W Wet Location

WET LOCATION POWER/JUMPER CABLE

This Flexible Connector is designed to work with all of our Linear Outdoor Systems in outdoor damp and wet environments. This Flexible Connector is easy to install and configure, helping you create innovative lighting designs. Length 12" or 96" .

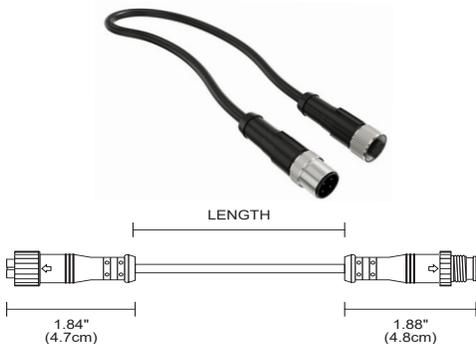

Product	Type	Product	Size	Option
OC	CFX	2CON	12IN	W
OC Outdoor Cable	CFX Flexible Connector	2CON 2 Pin Connector	12IN 12" 96IN 96"	W Wet Location

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------





Con-1-2CORD-O Cord conductors included

UNI STATIC WHITE POWER SUPPLY

Universal Power Supply: 120/277VAC-24VDC with Universal dimming ELV, Triac or 0-10V dimmers. 100-0% Flicker free dimming. Aluminum casing for optimal heat dissipation. Isolated output power per NEC and UL safety requirements. UL & ETL recognized/ listed, meets UL8750, 1310 requirement. Auto-reset; short circuit, overload and thermal protection. Class 2 power supply. Efficient, High power factor > 0.90. Exceeds California Title 24 Requirements AAA rating. Efficiency > 84% Power Factor > 0.90. Case TC 90C° Max. Protection Input / Output Storage -30°C / +90°C Humidity 95% RH Max. Class 2 Power Supply Dimming ELV, Triac, 0-10V IP Rating IP20, IP67



Product	Wattage	Type	Voltage	Option
PSB	60W	UNI	24VDC	W
PSB Power Supply with Junction Box	60Watts 96Watts	UNI Uni Driver	24VDC 24VDC	W Wet Location

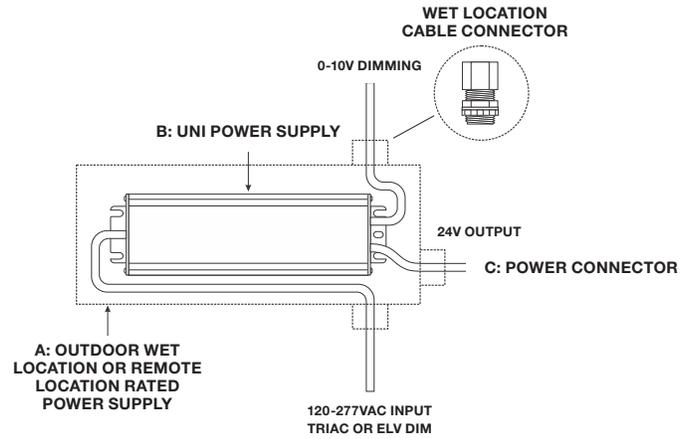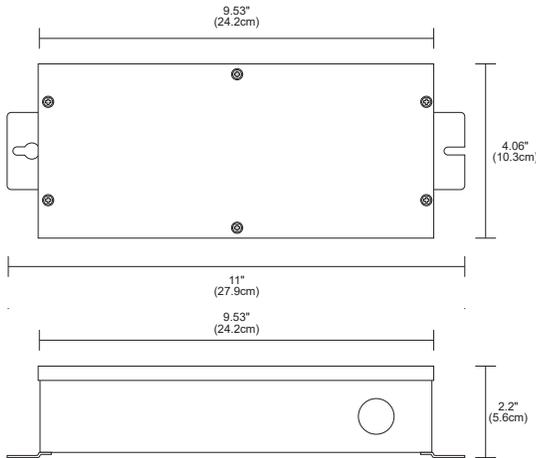

A. WET RATED OUTDOOR POWER SUPPLY ENCLOSURE

Use of Slick Linear Outdoor requires a Wet Location Junction Box to house the wire connection from the Power Supply. The Outdoor Connection Box is sold separately.

B. UNI STATIC WHITE POWER SUPPLY

Outdoor-rated Power Supplies are required for use with Slick Linear Outdoor, and are sold separately. Slick Linear Outdoor has a maximum run length of 40' at 2 watts per foot or 20' at 5 watts.

C. POWER CONNECTOR

Power Connector connects to the remote power supply. Comes connected to each end of the fixture.


TRIAC DIMMING & CONTROLS	
LUTRON SKYLARK: S2-L-WH	LUTRON MALV-600-WH
LUTRON DVLV-600P-WH	LUTRON MALV-1000-WH
LUTRON DVLV-603P-WH	LUTRON MA-R-XX

ELV DIMMING & CONTROLS	
LUTRON DIVA: DVELV-300P	LUTRON MAESTRO: MAELV-600
LUTRON SKYLARK: SELV-300P	LEGRAND ADORNE: ADTP-703TUM4
LUTRON RADIO RA2: RRD-6NA	

0-10 DIMMING & CONTROLS		
PHILIPS SUNRISE: SR1200ZTUNV	LUTRON GRAFIK EYE QS: QSGRJ-XP	LEVITON IP710-LFZ
LUTRON DIVA: DVTV-WH, DVSTV-WH	LUTRON RADIO RA2: RRD-10ND	LEGRAND: ADPD4FBL3P2W4
LUTRON NOVA T: NTSTV-DV-XX	LEVITON: LEV40050	

- Flicker free dimming
- Class 2 power supply
- Efficient, High power factor > 0.90
- Aluminum casing for optimal heat dissipation
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements
- Auto-reset; short circuit, overload and thermal protection
- The Solid State Constant Voltage Uni-Power Supply is compatible with most commercially available Dimmers:

- Triac Dimmer: (Forward Phase) Typically used for the dimming of Incandescent and Low Voltage Magnetic Transformers
 - ELV Dimmer: (Reverse Phase) Dimming of Electronic Low Voltage Transformers and Power Supply's used for LED lighting
 - 0-10 Dimmer: Dims the Low Voltage side of a 0-10 volt power supply commonly used in large scale lighting or commercial applications.
- The Uni-Power Supply is recommended with any Siemens/Murray brand of arc fault breaker to overcome the issues with tripping the breakers with an ELV LED Low Voltage Drivers.

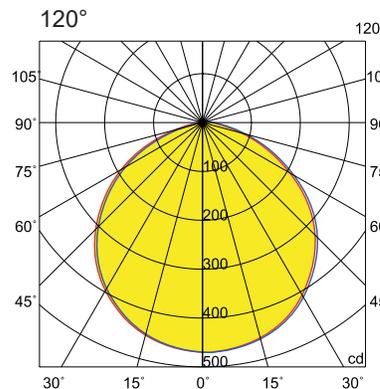

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

INDOOR CONSTANT VOLTAGE REMOTE POWER SUPPLIES

24VDC, UNIVERSAL DIMMING WITH ELV, TRIAC, & 0-10V FOR STATIC WHITE, WARM DIM

UNIVERSAL POWER SUPPLIES & RECOMMENDED DIMMERS

ORDERING CODE	PSB-40W-UNI-24VDC	PSB-60W-UNI-24VDC	PSB-2X40W-UNI-24VDC	PSB-2X60W-UNI-24VDC
SPECIFICATIONS				
MAXIMUM LOAD	40W	60W	2X40W	2X60W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 3.12" X 2.18"	12.4" X 3.12" X 2.18"	12.15" X 6.48" X 2.18"	12.15" X 6.48" X 2.18"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
T-BAR MOUNTING	PSB-40W-UNI-24VDC-TB	PSB-60W-UNI-24VDC-TB	PSB-2X40W-UNI-24VDC-TB	PSB-2X60W-UNI-24VDC-TB
IN-WALL MOUNTING	PSB-40W-UNI-24VDC-IW	PSB-60W-UNI-24VDC-IW	PSB-2X40W-UNI-24VDC-IW	PSB-2X60W-UNI-24VDC-IW

UNIVERSAL POWER SUPPLIES & RECOMMENDED DIMMERS

ORDERING CODE	PSB-96W-UNI-24VDC	PSB-2X96W-UNI-24VDC	PSB-3X96W-UNI-24VDC	PSB-4X96W-UNI-24VDC
SPECIFICATIONS				
MAXIMUM LOAD	96W	2X96W	3X96W	4X96W
INPUT VOLTAGE	120-277VAC	120-277VAC	120-277VAC	120-277VAC
OUTPUT VOLTAGE	24VDC	24VDC	24VDC	24VDC
DIMENSIONS	12.4" X 3.12" X 2.18"	12.15" X 6.48" X 2.18"	14" X 10" X 3"	17" X 13" X 3"
CLASSIFICATION	CLASS 2	CLASS 2	CLASS 2	CLASS 2
T-BAR MOUNTING	PSB-96W-UNI-24VDC-TB	PSB-2X96W-UNI-24VDC-TB	PSB-3X96W-UNI-24VDC-TB	PSB-4X96W-UNI-24VDC-TB
IN-WALL MOUNTING	PSB-96W-UNI-24VDC-IW	PSB-2X96W-UNI-24VDC-IW	NA	NA

ELV DIMMING & CONTROLS

LUTRON DIVA: DVELV-300P	•	•	•	•
LUTRON SKYLARK: SELV-300P	•	•	•	•
LUTRON RADIO RA2: RRD-6NA	•	•	•	•
LUTRON MAESTRO: MAELV-600	•	•	•	•
LEGRAND ADORNE: ADTP-703TUM4	•	•	•	•

0-10 DIMMING & CONTROLS

PHILIPS SUNRISE: SR1200ZTUNV	•	•	•	•
LUTRON DIVA: DVTV-WH, DVSTV-WH	•	•	•	•
LUTRON NOVA T: NTSTV-DV-XX	•	•	•	•
LUTRON GRAFIX EYE QS: QSGRJ-XP	•	•	•	•
LUTRON RADIO RA2: RRD-10ND	•	•	•	•
LEVITON: LEV40050	•	•	•	•
LEVITON IP710-LFZ	•	•	•	•
LEGRAND: ADPD4FBL3P2W4	•	•	•	•

TRIAC DIMMING & CONTROLS

LUTRON SKYLARK: S2-L-WH	•	•	•	•
LUTRON DIVA DVLV-600P-WH	•	•	•	•
LUTRON DIVA DVLV-603P-WH	•	•	•	•
LUTRON MAESTRO MALV-600-WH	•	•	•	•
LUTRON MAESTRO MALV-1000-WH	•	•	•	•
LUTRON MAESTRO MA-R-XX	•	•	•	•

- Flicker free dimming
- Aluminum casing for optimal heat dissipation
- Isolated output power per NEC and UL safety requirements
- UL & ETL recognized/ listed, meets UL 8750, 1310 requirements
- Auto-reset; short circuit, overload and thermal protection
- Class 2 power supply
- Efficient, High power factor > 0.90



*Title 24 with JAB listed PureEdge products and systems

*Tunable White requires Dual power Supplies and Controls. For single control use with our proprietary Tunable White Controller CDMX-1, refer to Universal Tunable White Power Supply Specifications. Up + Down Light fixtures and Systems can be controlled individually or together depending on the power supply selection.

- The Solid State Constant Voltage Uni-Power Supply is compatible with most commercially available Dimmers:
 - Triac Dimmer: (Forward Phase) Typically used for the dimming of Incandescent and Low Voltage Magnetic Transformers
 - ELV Dimmer: (Reverse Phase) Dimming of Electronic Low Voltage Transformers and Power Supplies used for LED lighting
 - 0-10 Dimmer: Dims the Low Voltage side of a 0-10 volt power supply commonly used in large scale lighting or commercial applications.
- The Uni-Power Supply is recommended with any Siemens/Murray brand of arc fault breaker to overcome the issues with tripping the breakers with an ELV LED Low Voltage Drivers.

T-BAR Mounting Kit: Includes power supply, box cover, and T-bar hangers for installing Junction Box above ceiling with in easy reach. Comes with 4' of 14 gauge pair Teflon cables with quick secure connectors.

Ordering Codes : PSB-40W-UNI-24VDC-TB, PSB-60W-UNI-24VDC-TB, PSB-96W-UNI-24VDC-TB, PSB-2X40W-UNI-24VDC-TB, PSB-2X60W-UNI-24VDC-TB, PSB-2X96W-UNI-24VDC-TB, PSB-3X96W-UNI-24VDC-TB, PSB-4X96W-UNI-24VDC-TB



In-Wall Mounting Kit: Includes power supply, box cover and stud hangers for installing Junction Box in wall. Select "IW" in the options section of compatible power supply ordering codes if an In-Wall Mounting Kit is needed.

Ordering Codes 5.1" x 14.25": PSB-40W-UNI-24VDC-IW, PSB-60W-UNI-24VDC-IW, PSB-96W-UNI-24VDC-IW


Ordering Codes 8.5" x 14.25": PSB-2X40W-UNI-24VDC-IW, PSB-2X60W-UNI-24VDC-IW, PSB-2X96W-UNI-24VDC-IW

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

WIRING DIAGRAMS UNIVERSAL POWER SUPPLY


Application: ELV dimming for Static White

Dimming: Dimmable with ELV dimmer: Legrand, Adorne ADTP703TU; Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

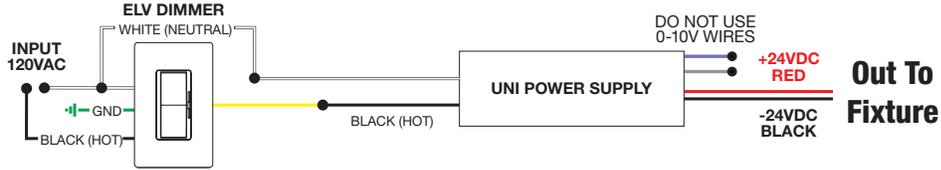

Application: 0-10V dimming for Static White

Dimming: Dimmable with 0-10V dimmer: Philips Sunrise: SR1200ZTUNV; Lutron Diva: DVTV-WH, DVSTV-WH; Lutron Nova T: NTSTV-DV-XX; Lutron Grafix EYE QS: QSGRJ-XP; Lutron Radio Ra2: RRD-10ND; Leviton: LEV40050; Leviton IP710-LFZ; Legrand: ADPD4FBL3P2W4

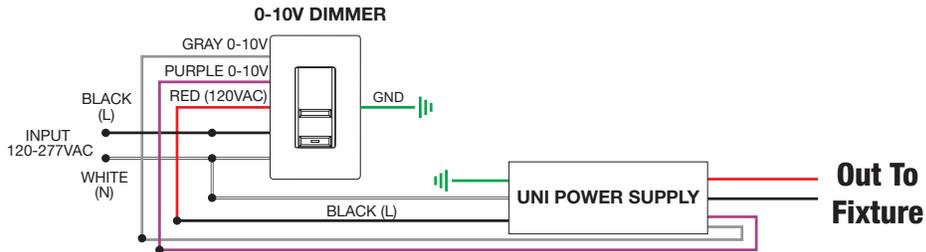

PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--