



DESCRIPTION

LEDs are field replaceable. Fixture is Non-IC rated. Suitable for new residential, new commercial, and remodel. Lights textured walls up to 30' high. Mounts flush to ceilings or recessed within a pocket cove for the most dramatic effect. Link multiple Stratus fixtures to create long runs. Includes one internal LED Power Supply per unit. (0-10V for WW and CW; DMX for RGB). Feed fixture with 120-277VAC. Coordinate installation with electrician and drywall contractors.

INCLUDED COMPONENTS

Wall Mounting Bracket, Housing, Joiner Bracket, Reflector, LED Panel, Power Supply, and Louver

ACCESSORIES

End Caps

APPLICATIONS

Indoor or Outdoor under Awning. Wall Grazer, General Lighting, and Retail applications.

LAMP

- 3000K and 4200K color temperatures
- Lumen values are based on the Warm White 3000K test.
- 50,000 Hour Lamp Life

DIMMING & CONTROLS

- Dimmable Power Supply included (0-10V) for WW and CW; (DMX) for RGB. Controllers sold separately
- [Lutron](#) Hi-Lume/Ecosystem

MAKE IT SMART

- [Pure Smart™ WIZ Pro Controls](#)

APPROVALS

Damp Location, Class 2 wiring, ETL Listed, RoHS, Made in America, Patent Pending JA8 listed with universal power supplies in 27K> CCT. Click the link to access our full Title 24 compliance listings: pureedgelighting.com/resources

COMPLIANCE

ETL, RoHS, Class 2, Damp Location, Made in USA.

[IES Files](#) | [Revit Files](#) | [Sketchup Files](#)


INDOOR
120V-277V STANDARD POWER SUPPLY

Stratus Housing	Stratus LED Panel	Color Temperature
SH4	SP4	WW
SH1 1'	SP1 1' Indoor	WW 3000K Warm White
SH4 4'	SP4 4' Indoor	CW 4200K Cool White
		RGB Red, Green, & Blue

OUTDOOR - UNDER AWNING
120V-277V STANDARD POWER SUPPLY

Stratus Housing	Stratus LED Panel	Color Temperature
SH4	SP40D	WW
SH1 1'	SP10D 1' Outdoor	WW 3000K Warm White
SH4 4'	SP40D 4' Outdoor	CW 4200K Cool White
		RGB Red, Green, & Blue


PROJECT		FIXTURE TYPE		DATE	
---------	--	--------------	--	------	--

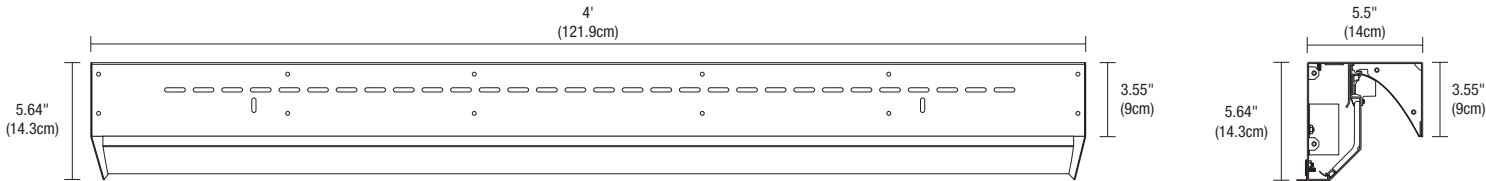

NOMINAL DELIVERED LUMENS

STATIC WHITE			
WATTS PER FOOT	15W		
COLOR TEMPERATURE	30K		42K
LUMENS PER FOOT (lm/ft)	56		67
LUMENS PER WATT (lm/w)	832		1005
CRI	90+		90+

INCLUDED COMPONENTS

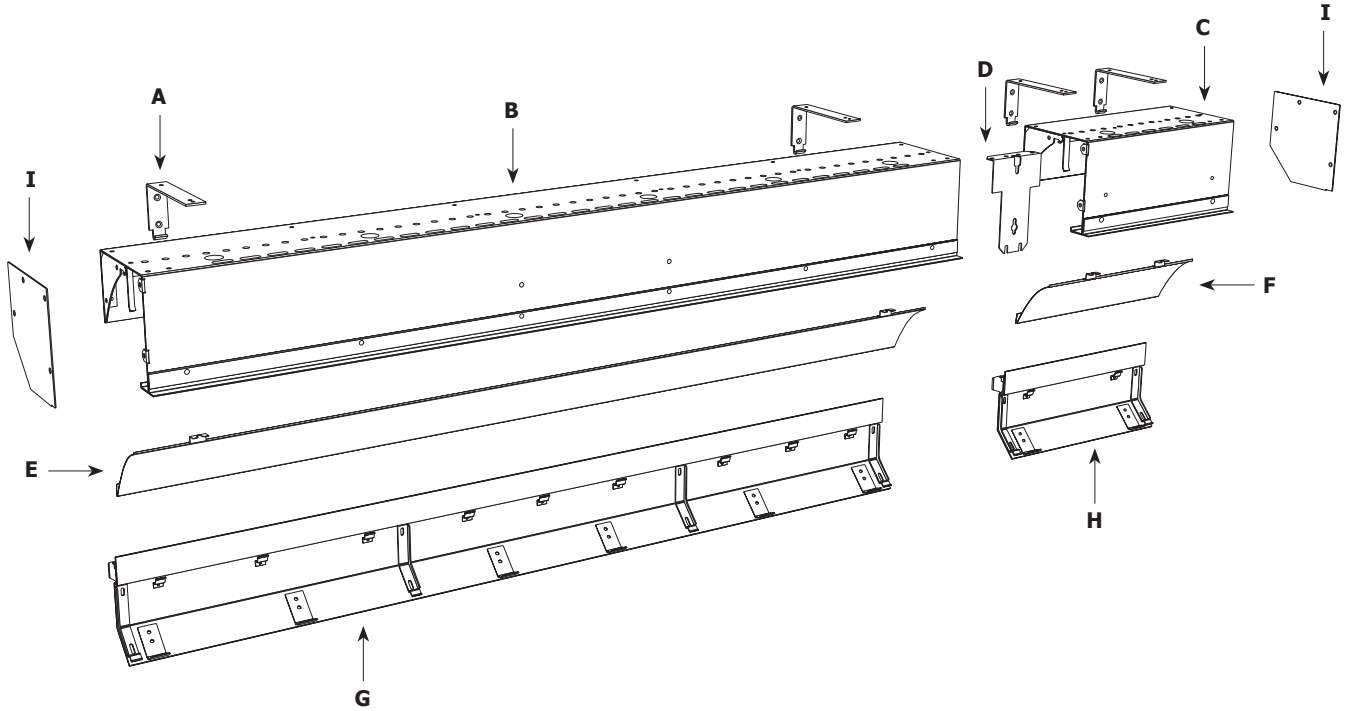

A. WALL MOUNTING BRACKET

For all three types of installation conditions: new residential, new commercial, and remodel.

B. 4' HOUSING

Non-IC, 0.08" thick die-formed aluminum.

C. 1' HOUSING

Non-IC, 0.08" thick die-formed aluminum.

D. JOINER BRACKET

Joins multiple lengths of Stratus fixture.

E. 4' REFLECTOR

Precision-cut aluminum.

F. 1' REFLECTOR

Precision-cut aluminum.

G. 4' LED PANEL

Integrated 3000K, 42000K, or RGB LEDs.


H. 1' LED PANEL

Integrated 3000K, 42000K, or RGB LEDs.

I. END CAP

Sold in pairs. Required at end of run.

EXTRA COMPONENTS






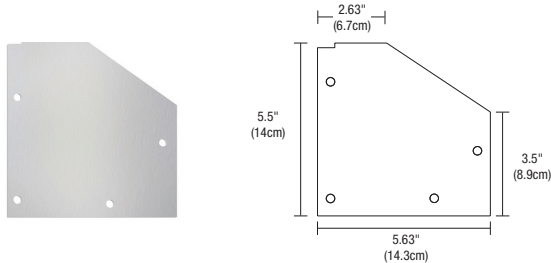


END CAP

Sold in pairs. Required at end of run.

Product	Type
SG	CAP
SG Stratus Wall Grazer	CAP End Cap

PROJECT	FIXTURE TYPE	DATE
---------	--------------	------

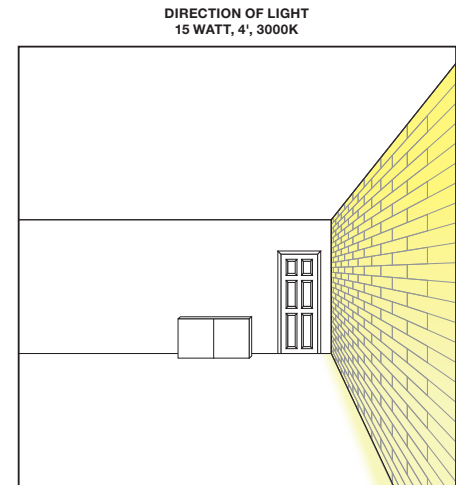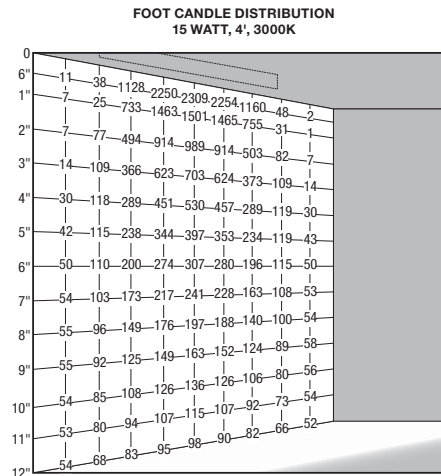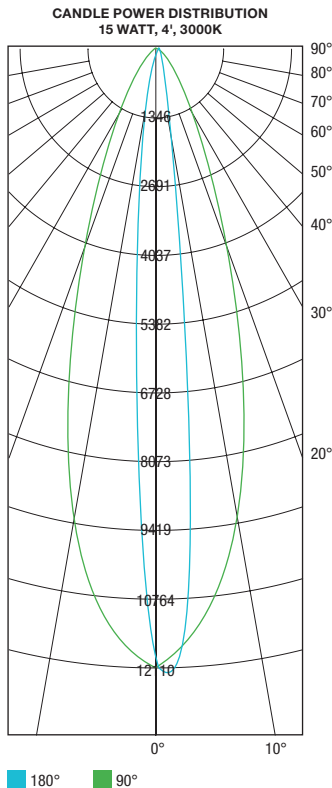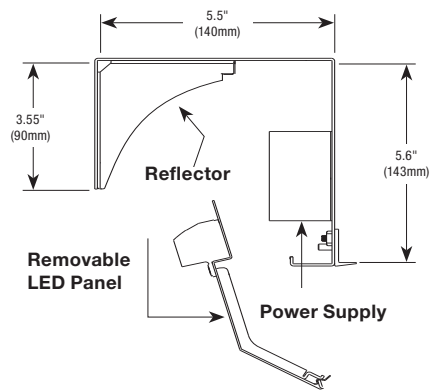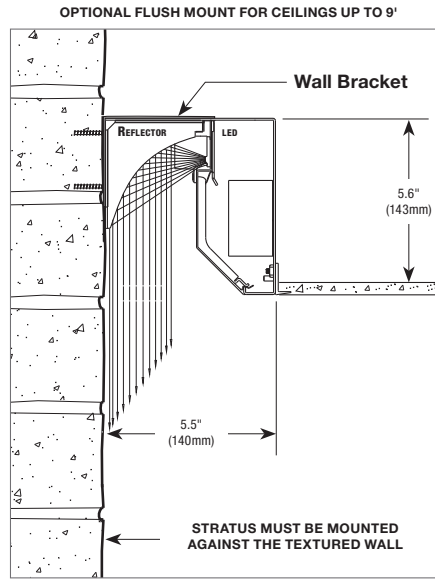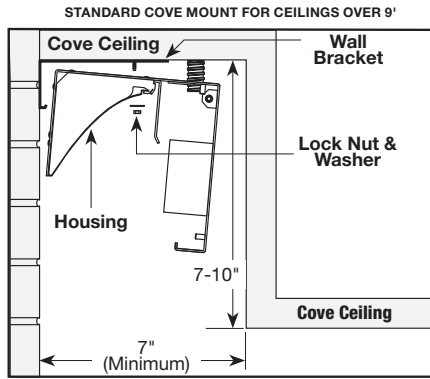

UNIFIED GLARE RATING	
1 FOOT	3.4
4 FOOT	5.2