

AETHER 2" - Round Adjustable Trim

R2ARAT

WAC®



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Shallow housing that is designed to fit in tight plenum spaces without sacrificing lumen output.

FEATURES

- Designed to fit in tight plenum
- 2" trim aperture, 2" housing height
- Damp Location Trims: 0-30° vertical and 365° horizontal adjustment
- Wet Location Trims: 0-25° vertical and 365° horizontal adjustment
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction:	Die-cast aluminum trim with die-cast aluminum heat sink
Dimming:	100% - 5% with 0-10V 100% - 5% with Electronic Low Voltage (ELV)/ TRIAC
Input:	120V-277V AC
Power	9W, 15W, power factor 0.9
Mounting:	Retention clips firmly hold trim to housing
Finish:	Powder Coated White, Black/White, Haze/White, Black
Ceiling thickness:	½" - 1"
Standards:	UL & cUL Damp Listed, UL & cUL Wet Listed (Lensed options only), Title 24 JA8 Compliant

Trim (See next page for housing)	Model	Beam	Color Temp	CRI	Lumens*	CBCP*	Finishes
	R2ARAT Round, 0-30° Adjustable Damp Location	S 15°	827 2700K	85	835	8045	BK Black BKWT Black/White HZWT Haze/White WT White
			830 3000K	85	885	8535	
			835 3500K	85	905	8740	
			840 4000K	85	915	8810	
			927 2700K	90	690	6625	
		N 26°	930 3000K	90	720	6935	
			827 2700K	85	1270	4270	BK Black BKWT Black/White HZWT Haze/White WT White
			830 3000K	85	1345	4525	
			835 3500K	85	1375	4635	
			840 4000K	85	1390	4675	
		F 40°	927 2700K	90	1050	3535	
			930 3000K	90	1095	3680	
			827 2700K	85	1260	2515	BK Black BKWT Black/White HZWT Haze/White WT White
			830 3000K	85	1335	2670	
			835 3500K	85	1370	2735	
			840 4000K	85	1380	2755	
			927 2700K	90	1045	2085	
			930 3000K	90	1090	2170	
	R2ARAT Round, 0-25° Adjustable Lensed, Wet Location	S 16°	827 2700K	85	765	6215	LBK Lensed Black LBKWT Lensed Black/White LHZWT Lensed Haze/White LWT Lensed White
			830 3000K	85	810	6590	
			835 3500K	85	830	6750	
			840 4000K	85	840	6805	
			927 2700K	90	630	5115	
		N 28°	930 3000K	90	660	5355	
			827 2700K	85	1175	3680	LBK Lensed Black LBKWT Lensed Black/White LHZWT Lensed Haze/White LWT Lensed White
			830 3000K	85	1245	3905	
			835 3500K	85	1275	4000	
			840 4000K	85	1285	4030	
		F 40°	927 2700K	90	970	3050	
			930 3000K	90	1015	3175	
			827 2700K	85	1160	2220	LBK Lensed Black LBKWT Lensed Black/White LHZWT Lensed Haze/White LWT Lensed White
			830 3000K	85	1230	2355	
			835 3500K	85	1260	2415	
			840 4000K	85	1270	2430	
			927 2700K	90	960	1840	
			930 3000K	90	1000	1915	

R2ARAT-_____ - _____

Example: **R2ARAT-N930-WT**

Please see next page for housing (required)

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761

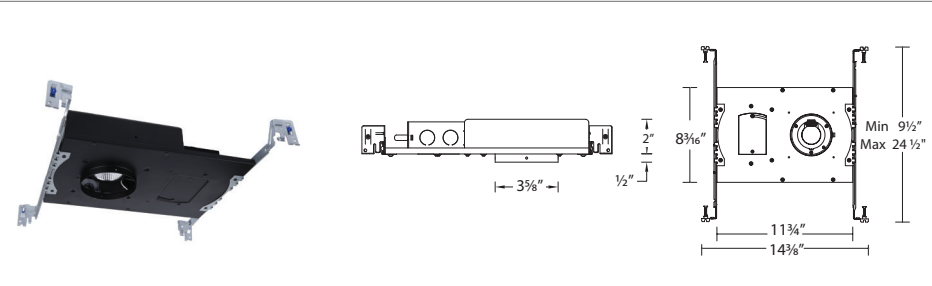
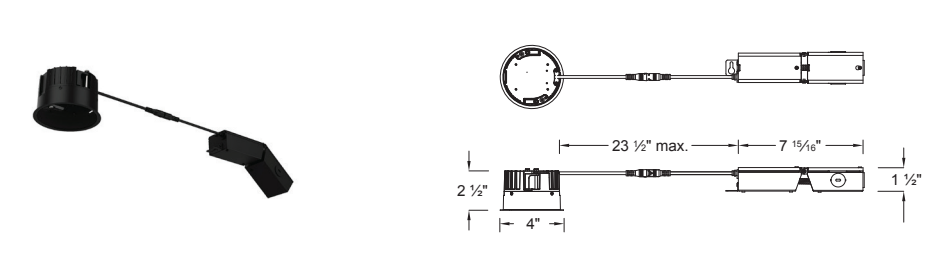
AETHER 2" - Round Adjustable Trim Housing



*Lumen and CBCP data are shown for 15W (HR-2LED-H13A, HR-2LED-H13AC, HR-2LED-R15A) housings.
Use 0.66 multiplier to determine data for 9W (HR-2LED-R10A) housing.

Example: R2ARAT-F840-LWT with 9W housing: 1270 lm x 0.66 = 838 lm

$$2430 \text{ CBCP} \times 0.66 = 1604 \text{ CBCP}$$

Housing	Model
	HR-2LED-H13A New Construction (15W) IC-rated, Airtight
	HR-2LED-H13AC New Construction (15W) IC-rated, Airtight Chicago Plenum
	HR-2LED-R10A Remodel (9W) IC Rated, Airtight
	HR-2LED-R15A Remodel (15W) Non-IC Rated, Airtight

HR-2LED-_____

Example: **HR-2LED-H13A**