

AETHER 2" - Round Downlight Trim

R2ARDT

WAC®



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

Shallow housing that is designed to fit in tight plenum spaces without sacrificing lumen output.

FEATURES

- Designed to fit in tight plenum
- Wet location listed for trims
- 2" trim aperture, 2" housing height
- 35° cut-off angle
- Universal input voltage (120V-277V)
- 5 year WAC Lighting product warranty

SPECIFICATIONS

Construction:	Die-cast aluminum trim with die-cast aluminum heat sink
Dimming:	100% - 5% with 0-10V 100% - 5% with Electronic Low Voltage (ELV)/ TRIAC
Input:	120V-277V AC
Power	15W, power factor 0.9
Mounting:	Retention clips firmly hold trim to housing
Finish:	Powder Coated White, Black and White, Enamel Coated Haze
Ceiling thickness:	½" - 1"
Standards:	UL & cUL Listed, wet location listed trims, Title 24 JA8 Compliant

Trim (See next page for housing)	Model	Beam	Color Temp	CRI	Lumens*	CBCP*	Finishes
	R2ARDT Round, Downlight Lensed, Wet Location	S 17°	827 2700K	85	1230	6000	BK Black BKWT Black/White HZWT Haze/White WT White
			830 3000K	85	1295	6310	
			835 3500K	85	1320	6440	
			840 4000K	85	1335	6500	
			927 2700K	90	1030	5000	
			930 3000K	90	1065	5185	
		N 24°	827 2700K	85	1230	3860	BK Black BKWT Black/White HZWT Haze/White WT White
			830 3000K	85	1295	4060	
			835 3500K	85	1320	4140	
			840 4000K	85	1335	4180	
			927 2700K	90	1025	3215	
			930 3000K	90	1065	3335	
		F 40°	827 2700K	85	1210	2125	BK Black BKWT Black/White HZWT Haze/White WT White
			830 3000K	85	1275	2235	
			835 3500K	85	1300	2280	
			840 4000K	85	1310	2300	
			927 2700K	90	1010	1770	
			930 3000K	90	1045	1835	
		W 50°	827 2700K	85	1135	1390	BK Black BKWT Black/White HZWT Haze/White WT White
			830 3000K	85	1195	1460	
			835 3500K	85	1220	1490	
			840 4000K	85	1230	1505	
			927 2700K	90	950	1155	
			930 3000K	90	985	1200	

R2ARDT-_____ - _____

Example: R2ARDT-N930-HZWT

Please see next page for housing (required)

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

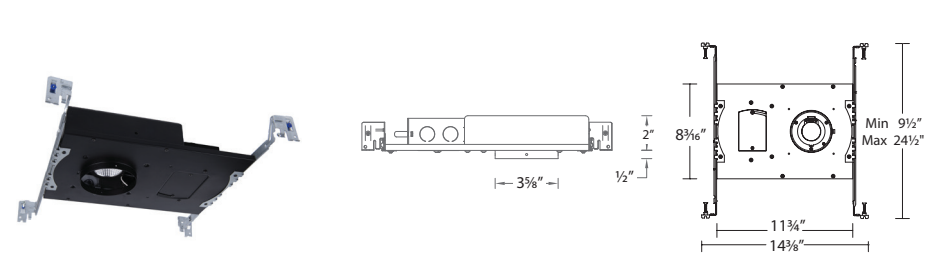
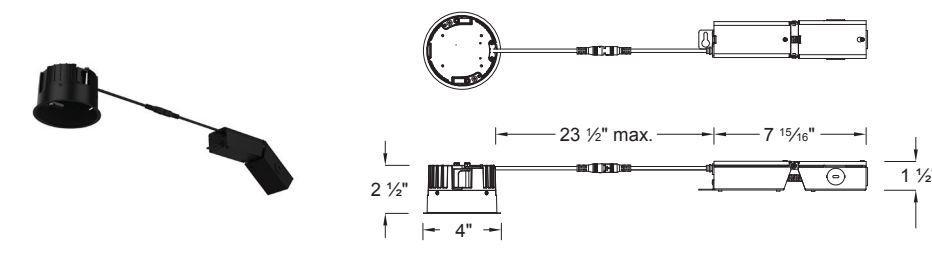
Ontario, CA 91761

AETHER 2" - Round Downlight Trim Housing



* Lumen and CBCP data are shown for 15W (HR-2LED-H13A, HR-2LED-H13AC, HR-2LED-R15A) housings.
 Use 0.66 multiplier to determine data for 9W (HR-2LED-R10A) housing.

Example: R2ARDT-F840-WT with 9W housing: 1310 lm x 0.66 = 865 lm
 2300 CBCP x 0.66 = 1518 CBCP

Housing	Model
	HR-2LED-H13A New Construction (15W) IC-rated, Airtight
	HR-2LED-H13AC New Construction (15W) IC-rated, Airtight Chicago Plenum
	HR-2LED-R10A Remodel (9W) IC Rated, Airtight
	HR-2LED-R15A Remodel (15W) Non-IC Rated, Airtight

HR-2LED-_____
 Example: **HR-2LED-H13A**