

R2FBRT, R2FBR2T

2" FQ Remodel Housing

WAC

SPECIFICATIONS

Input Universal 120-277V AC 50/60 Hz

Standards: ETL & cETL

Dimming: Electronic Low Voltage (ELV): 100%-1%
TRIAC: 100%-1%
0-10V: 100-1%

Mounting: Ceiling thickness: 1/2"- 1"
Ceiling cutout: Ø 3 1/2"

Construction: 20 Gauge galvanized sheet
Die-cast spackle flange included

Warranty 5 year WAC Lighting product warranty



Fixture Type:

Catalog Number:

Project: _____

Location: _____

Remodel Non-IC





Model		Power	Rating
R2FBRT <i>Round and Square Trim</i>	1	15W	Non-IC
	2	21W	Non-IC
	3	25W	Non-IC

R2FBRT-___

Example: **R2FBRT-2**

Remodel IC Airtight

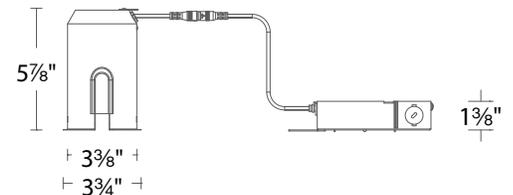

Model		Power	Rating
R2FBR2T <i>Round and Square DL Trim</i>	1	15W	IC

R2FBR2T-___

Example: **R2FBR2T-1**

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters/Eastern Distribution Center

44 Harbor Park Drive

Port Washington, NY 11050

Central Distribution Center

1600 Distribution Ct

Lithia Springs, GA 30122

Western Distribution Center

1750 Archibald Avenue

Ontario, CA 91761