### R2FSW1L

## FQ 2" Shallow - Square Wall Wash Trimless





Fixture Type:	
Catalog Number:	
Project:	
Location:	

### **PRODUCT DESCRIPTION**

The FQ Recessed series offers a complete line of high performance LED luminaires that provide outstanding functionality and quality. The series features superlative glare control with 30° shielding, 35° vertical tilting and uniform floor-to-ceiling wall washing. Multiple power level options and a full line of round and square, trimmed and trimless luminaires offer versatile solutions for various lighting applications. Easy to order, install, and service.

#### **FEATURES**

- Two-piece die-cast construction, compact size suitable for shallow ceiling plenum
- · Light engine mounted on trim with springs for easy replacement
- · Designed for even wall illumination both vertically and horizontally
- 5 year WAC Lighting product warranty

### **SPECIFICATIONS**

**Construction:** Durable die-cast aluminum construction

Input Universal 120-277V AC 50/60 Hz

**Dimming:** Electronic Low Voltage (ELV): 100%-1%

TRIAC: 100%-1% 0-10V: 100-1%

**Light Source:** High output 3-step Mac Adam Ellipse COB

Rated life of 50,000 hours at L70

**Mounting:** Heavy gauge retention clips support trim firmly.

Safety cabling standard. Ceiling cutout: Ø 3 1/2" Accomodates 1/2 "- 1 " ceiling thickness

**Finish:** Electrostatically powder coated White, Black, Dark

Bronze. Enamel coated Haze.

Standards: ETL & cETL Wet Location Listed,

Title 24 JA8 Compliant.

	Model	Beam	*Lumens	CBCP	Color Temp	CRI	Finishes	Reflector/Trim
			865	N/A	<b>927</b> 2700K	90		
TI II	<b>R2FSW1L</b> Square Trimless	A Asym	910	N/A	<b>930</b> <i>3000K</i>	90	BK DB HZ WT	Black Dark Bronze Haze White
├ 2¼" ┤			930	N/A	<b>935</b> <i>3500K</i>	90		

R2FSW1L - \_\_\_-Example: R2FSW1L-930-WT

Please see next page for housing units (required)

## R2FSW1L

# FQ 2" Shallow - Square Wall Wash Trimless



HOUSING (Required)		Model	Power
New Construction IC Airtight	63/8"	R2FSN1L	<b>1</b> 15WIC
Remodel Non-IC	5½" — 1¾" 5¾" — 5¾" — 2"	R2FSRL	<b>1</b> 15WIC

R2FS \_\_\_\_-

Example: R2FSN1L-1

### R2FSW1L-WD

# FQ 2" Shallow - Square Wall Wash Trimless (Dim-To-Warm)





DD	NICT	DES	CDI	DTI	$\sim$ NI

The FQ Recessed series offers a complete line of high performance LED luminaires that provide outstanding functionality and quality. The series features superlative glare control with 30° shielding, 35° vertical tilting and uniform floor-to-ceiling wall washing. Multiple power level options and a full line of round and square, trimmed and trimless luminaires offer versatile solutions for various lighting applications. Easy to order, install, and service.

### **FEATURES**

- Two-piece die-cast construction, compact size suitable for shallow ceiling plenum
- · Light engine mounted on trim with springs for easy replacement
- · Designed for even wall illumination both vertically and horizontally
- 5 year WAC Lighting product warranty

Fixture Type:	
Catalog Number:	
Project:	
Location:	

#### **SPECIFICATIONS**

**Construction:** Durable die-cast aluminum construction

Input Universal 120-277V AC 50/60 Hz

**Dimming:** Electronic Low Voltage (ELV): 100%-1%

TRIAC: 100%-1% 0-10V: 100-1%

**Light Source:** High output 3-step Mac Adam Ellipse COB

Rated life of 50,000 hours at L70

**Mounting:** Heavy gauge retention clips support trim firmly.

Safety cabling standard. Ceiling cutout: Ø 3 1/2" Accomodates 1/2 "- 1 " ceiling thickness

**Finish:** Electrostatically powder coated White, Black, Dark

Bronze. Enamel coated Haze.

Standards: ETL & cETL Wet Location Listed,

Title 24 JA8-2019 Compliant.

	Model	Beam	Lumens	CBCP	Color Temp	CRI	Finishes	Reflector/Trim
35/8"  - 21/4" -	<b>R2FSW1L</b> Square Trimless	A Asym	675	N/A	<b>WD</b> 3000K-1800K	90	BK DB HZ WT	Black Dark Bronze Haze White

R2FSW1L- -


Example: R2FSW1L-WD-WT

Please see next page for housing units (required)

## R2FSW1L-WD



# FQ 2" Shallow - Square Wall Wash Trimless (Dim-To-Warm)

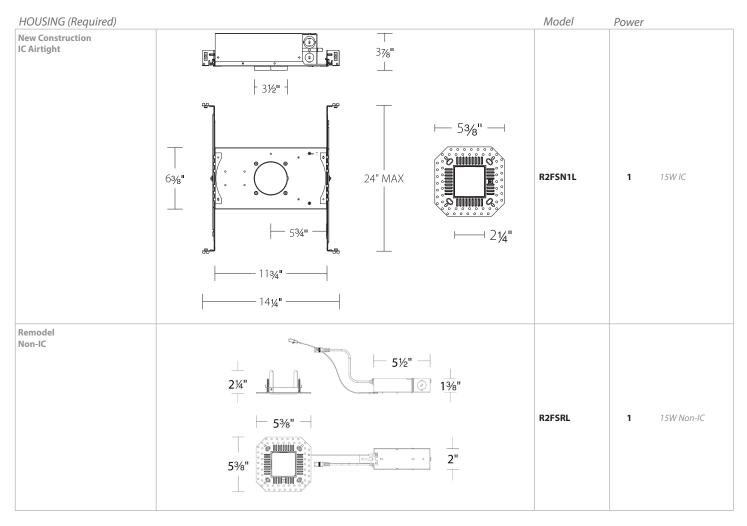

R2FS\_\_\_-

Example: R2FSN1L-1