



R3-GUICRAT

3" LINE VOLTAGE REMODEL HOUSING

RECESSED HOUSING

Project		
Customer		Date
Address		

Features

Body

IC Rated when using an LED bulb only (Max. 10 Watts)
Can have direct contact with insulation.

Non IC Rated when using a Halogen bulb (Max. 50 Watts)
Must have 3" clearance on all sides from insulation

Airtight in compliance with the WSEC-Washington state energy code

Approved Bulb

Trim accommodates one MR-16 or GU-10 based bulb.

Location

Suitable for dry or damp locations

Air Flow Restriction

Airtight models are designed to restrict air flow from room into plenums in compliance to the WSEC-Washington State Energy Code (less than 2.0 CFM)

Mounting

Supplied with (3) high tension remodeling clips designed to secure the housing to an existing sheet rock ceiling.

Junction Box

Pre-wired, galvanized steel J-box (25 cubic-inch) with (4) knockouts. Strain clamps and ground wire. Equipped with safety standard thermal protector rated for 90°C.
LABELS: ETL/CETL listed (ETL listed number: 4005878) ETL listed for throughbranch wiring (4) No. 12 AWG 900C and damp locations.





Description

The Beach Lighting 3" remodel recessed housing is suitable for most indoor locations.


SPECIFICATION

Application	Recessed Housing
Approved Location	Dry or Damp
Finish	
Bulb	MR-16 or GU-10
Warranty	3 years

Dimensions

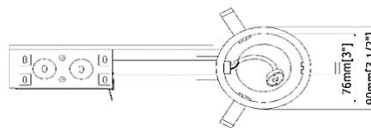

H: 4 1/4"



D: 3 1/4"



Due to our continued efforts to improve our products, products specifications are subject to change without notice.