



R3.5R-12W-5CCT-D90-MW

3.5" ROUND REGRESSED DOWNLIGHT

RECESSED LIGHT

Project		
Customer		Date
Address		

Features

Body
Diecast aluminum construction with high quality, heat resistant finish. New Construction plate is sold separately.

Beam Spread
The fixture lens provides a 38° beam spread

LED Specifications
This general application light fixture is equipped with a 12 watt LED module that sustains constant efficiency by producing up to 885 lumens; with a typical CRI of 90 and a 50,000 hour life span. Available in 2700K TO 5000K Via Switch at heat sink.

Location
Suitable for damp locations

SPECIFICATION	
Application	Ceiling Surface Mount
Approved Location	Damp
Beam Angle	38°
CCT	2700K TO 5000K
Certification	cETLus
Class II	Yes
Color	Matte White
CRI	90
Dimming	10%-100% (120V only)
Input	AC120V 50/60HZ
LM79	Yes
LM80	Yes
Lumens	885
Lumens per Watt	73
Power Factor	>0. 98
Projected Life	70% @ 50, 000 hrs
Warranty	3 years
Wattage	12W



Description

The Beach Lighting 3.5" 12W LED regressed down light is suitable for most Damp locations



Accessories

R3.5-NC
New Construction Plate Sold Separately



Due to our continued efforts to improve our products, products specifications are subject to change without notice.

Photometry LIGHT DISTRIBUTION CURVE

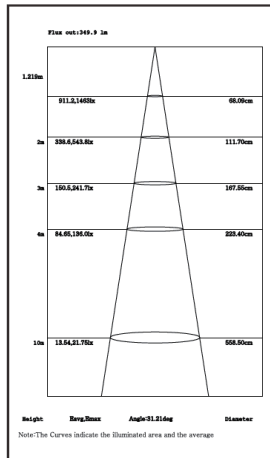

Dimensions

