

OCULARC 3.0 DIM-TO-WARM

0 -35° Adjustable - R3BRAN-WD, B3BSAN-WD

WAC



Fixture Type:

Catalog Number:

Project:

Location:

PRODUCT DESCRIPTION

The brilliant LED recessed downlight that gradually changes to a warmer color temperature as you dim. Great for new construction projects or remodels.

FEATURES

- Dim-to-Warm color temperature range: 3000K - 1800K
- Title 24 Compliant
- IC-rated Remodel and New Construction
- Airtight in New Construction and remodel
- Shallow housing under 4" depth
- Cutout 4 1/4"

SPECIFICATIONS

Construction: Die-cast aluminum trim and heat sink

Dimming: ELV or TRIAC or 0-10V dimming compatible

Input: 120-277V

Light Source: 11W 95 CRI Single LED Module. Rated Life: 50,000 hours


Mounting: Retention clips firmly hold trim to housing.

Finish: Powder coated

Ceiling thickness: 1/2" - 1 1/2"

Standards: ETL&cETL listed, Damp location listed

Operating Temperature: -4°F to 104°F (20°C to 40°C)

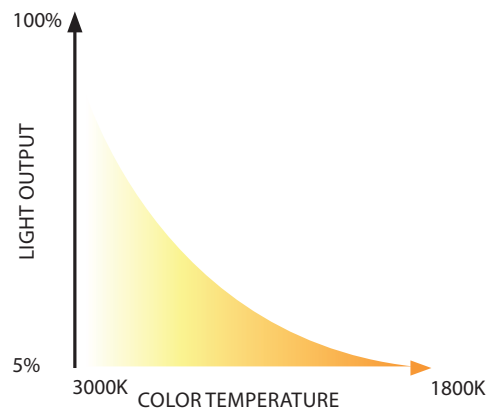

	Model	Beam	Max Lumens	Max CBCP	Color Temp	Finish
	R3BRAN Round	S 19° N 27° F 50°	745	2820	WD 3000K - 1800K	WT White BK Black
	0 - 35° Adjustable					
	R3BSAN Square	S 19° N 27° F 50°	745	2820	WD 3000K - 1800K	WT White BK Black
	0 - 35° Adjustable					

R3B__ - __WD-__

Example: **R3BRAN-SWD-WT**

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761