

# OCULARC 3.0 DIM-TO-WARM

0 -35° Adjustable - R3BRA, R3BSA

# WAC



Fixture Type:

Catalog Number:

Project:

Location:

## PRODUCT DESCRIPTION

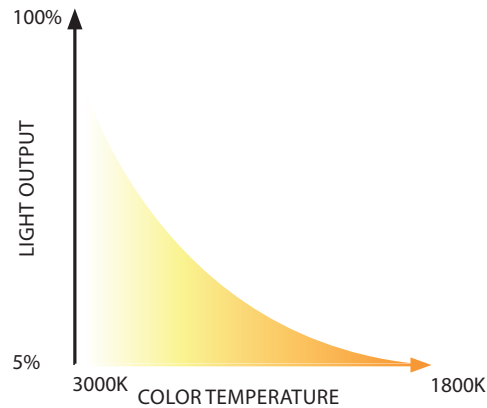
The brilliant LED recessed downlight that gradually changes to a warmer color temperature as you dim. Great for new construction projects or remodels.

## FEATURES

- Dim-to-Warm color temperature range: 3000K - 1800K
- Energy Star® Rated
- Title 24 Compliant
- IC-rated Remodel and New Construction
- Airtight in New Construction and remodel
- Shallow housing under 4" depth
- Cutout 4¼"

## SPECIFICATIONS

- Construction:** Die-cast aluminum trim and heat sink
- Dimming:** ELV or TRIAC or 0-10V dimming compatible
- Input:** 120V for R3BNICA-10, R3BBRT-10; 120-277V for R3BNICA-10U
- Light Source:** 11W 95 CRI Single LED Module. Rated Life: 50,000 hours
- Mounting:** Retention clips firmly hold trim to housing.
- Finish:** Powder coated
- Ceiling thickness:** ½" - 1"
- Standards:** ETL&cETL listed, Damp location listed
- Operating Temperature:** -4°F to 104°F (20°C to 40°C)



Trims (Order Housing Separately)	Model	Beam	Max Lumens	Max CBCP	Color Temp	Finish
	<b>R3BRA</b> Round 0 - 35° Adjustable	<b>S</b> 19° <b>N</b> 27° <b>F</b> 50°	745	2820	<b>WD</b> 3000K - 1800K	<b>WT</b> White <b>BK</b> Black
	<b>R3BSA</b> Square 0 - 35° Adjustable	<b>S</b> 19° <b>N</b> 27° <b>F</b> 50°	745	2820	<b>WD</b> 3000K - 1800K	<b>WT</b> White <b>BK</b> Black

## R3BRA-\_\_WD-WT

Example: R3BRA-SWD-WT

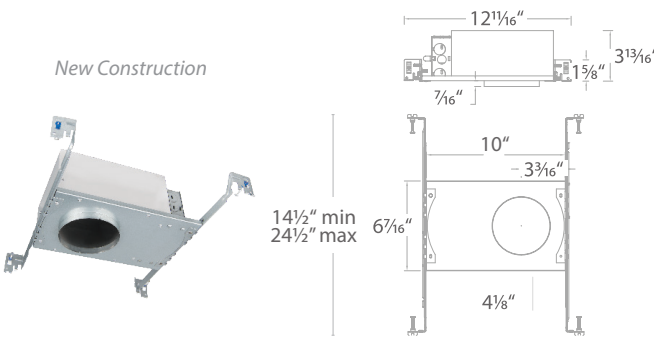
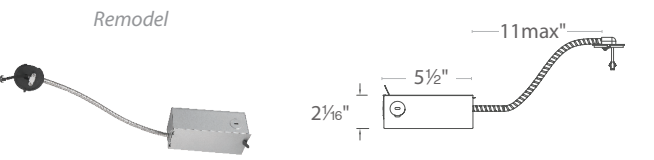
wacighting.com	Headquarters, East Manufacturing Facility	South East Manufacturing Facility	Central Manufacturing Facility	West Manufacturing Facility
Phone (800) 526.2588	44 Harbor Park Drive	1600 Distribution Ct	1700 South J Elmer Freeway, Ste 100	1750 S Archibald Ave
Fax (800) 526.2585	Port Washington, NY 11050	Lithia Springs, GA 30122	Cedar Hill, TX 75104	Ontario, CA 91761

# OCULARC 3.0 DIM-TO-WARM

0 -35° Adjustable - R3BRA, R3BSA



Housings (Required) - Order separately from trims

	Model	Input	Dimming	Notes
<p><i>New Construction</i></p>  <p>12<sup>1</sup>/<sub>16</sub>" 7<sup>1</sup>/<sub>16</sub>" 3<sup>13</sup>/<sub>16</sub>" 1<sup>1</sup>/<sub>8</sub>" 10" - 3<sup>3</sup>/<sub>16</sub>" 6<sup>7</sup>/<sub>16</sub>" 4<sup>1</sup>/<sub>8</sub>" 14<sup>1</sup>/<sub>2</sub>" min 24<sup>1</sup>/<sub>2</sub>" max</p>	<p><b>R3BNICA-10</b> IC-Rated, Airtight</p>	120V	100% - 5% TRIAC, ELV, 0-10V	Less than 4" plenum depth Allows adjustment in any direction when used with adjustable trims
	<p><b>R3BNICA-10U</b> IC-Rated, Airtight</p>	120V - 277V	<p><b>120V</b> 100% - 5% TRIAC, ELV, 0-10V</p> <p><b>277V</b> 100% - 1% 0-10V</p>	Ceiling thickness: 1/2" - 1"
<p><i>Remodel</i></p>  <p>11max" 5<sup>1</sup>/<sub>2</sub>" 2<sup>1</sup>/<sub>16</sub>"</p>	<p><b>R3BBRT-10</b> IC Rated</p>	120V	100% - 5% TRIAC, ELV, 0-10V	Allows adjustment in any direction when used with adjustable trims Ceiling thickness: 1/2" - 1"

Example: **R3BNICA-10**

wacighting.com

Phone (800) 526.2588

Fax (800) 526.2585

Headquarters, East Manufacturing Facility

44 Harbor Park Drive

Port Washington, NY 11050

South East Manufacturing Facility

1600 Distribution Ct

Lithia Springs, GA 30122

Central Manufacturing Facility

1700 South J Elmer Freeway, Ste 100

Cedar Hill, TX 75104

West Manufacturing Facility

1750 S Archibald Ave

Ontario, CA 91761