



# R4-G19IC-SRAT

## 4" REMODEL SHALLOW HOUSING

### HOUSING

Project		
Customer		Date
Address		

## Features

### Body

Remodel housing features low 3 1/2" profile for ceilings. Pre-wired .037" steel housing adjusts up to 1 3/4" ceiling thickness. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in remodel applications. IC Rated: Can have direct contact with insulation.

### Air Flow Restriction

Airtight models are designed to restrict air flow from room into plenums in compliance to the WSEC-Washington State Energy Code (less than 2.0 CFM-Cubic feet per minute)

### Mounting

Supplied with (4) high tension remodeling clips designed to secure housing to an existing sheet rock ceiling of 1/2" or 5/8".

### Location

Suitable for damp locations  
Meets Title24 requirement

### Lighting Specifications

This housing is designed for IC rated ceilings. Accommodates one up to 25W GU-10 base bulb.

### Junction Box

Pre-wired, galvanized steel J-Box (25 cubic inch) with (4) knock-outs. Strain clamps and ground wire included. Equipped with safety standard thermal protector rated for 90°C. 3 quick connects provided on J-Box.


SPECIFICATION	
Application	Housing
Approved Location	Damp
Beam Angle	N/A
CCT	N/A
Certification	cETLus
Class II	N/A
Color	Silver
CRI	N/A
Dimming	10%-100% (120V only)
Input	AC120V 50/60HZ
LM79	N/A
LM80	N/A
Lumens	N/A
Lumens per Watt	N/A
Power Factor	>0.98
Projected Life	N/A
Warranty	3 years
Wattage	up to 25W



## Description

The Beach Lighting 4" remodel shallow housing is suitable for most indoor and outdoor locations.

## Dimensions

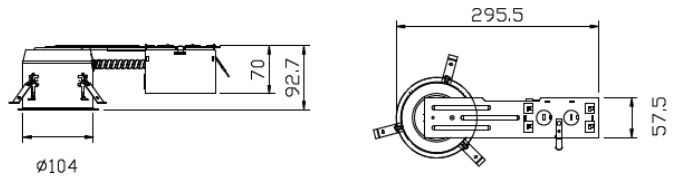

Ø104  
Diameter: 4 1/8"  
Depth: 3 1/2"



Cut Out: 4 1/4"

Beach Lighting housings are certified to be used only with Beach Lighting trims. Any Beach Lighting housing used with a different manufacturer's trim will void our certification and our warranty.



Due to our continued efforts to improve our products, product specifications are subject to change without notice.