WAC LIGHTING

Pop-In 4" Round 5CCT

Remote Remodel Downlight

Fixture Type:

Catalog Number:

Project:

Location:

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R4DRDR2	F 45°	9CS 2700K/3000K/3500K/4000K/5000K - 90	1000	1093	BK Black WT White

Example: **R4DRDR2-F9CS-BK**

DESCRIPTION

Minimum profile downlight with remote driver for easy remodel or new construction installation.




FEATURES

- 5-CCT Switchable between 2700K and 5000K
- Remote driver box allows easy installation into shallow plenums
- Sold as remodel, but new construction frame available
- Driver included
- 5 year warranty

SPECIFICATIONS


Construction	Die-cast Aluminum
Power:	12W
Input:	120-277 VAC,50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Light Source:	Integrated LED
Lens:	Frosted TIR lens
Rated Life:	50,000 Hours
Mounting:	Heavy gauge retention clips secures fixture to ceiling
Cut Out:	4"
Finish:	Electrostatically Powder Coated: Black, White
Ceiling Thickness:	1/2" - 1 1/2"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Title 24 JA8 Compliant, Airtight, IC

FINISHES:



Black White

LINE DRAWING

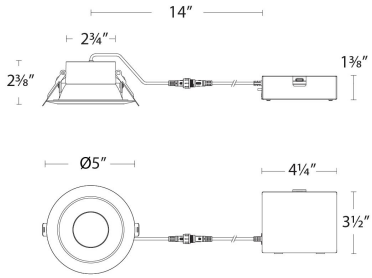

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. May 2026

WAC LIGHTING

Pop-In 4" Round 5CCT

Remote Remodel Downlight

Fixture Type:

Catalog Number:

Project:

Location:

ACCESSORIES

	Model	*Description*	*Finish*
	R4DRDN-FRAME	Pop-In 4"	

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. May 2026

WAC LIGHTING

Pop-In 4" Round 5CCT

Remote New Construction Downlight

Fixture Type:

Catalog Number:

Project:

Location:

Model	Beam	Color Temp & CRI	Lumens	CBCP	Finish
R4DRDN2	F 45°	9CS 2700K/3000K/3500K/4000K/5000K - 90	1000	1093	BK Black WT White

Example: **R4DRDN2-F9CS-BK**

DESCRIPTION

Minimum profile downlight with remote driver for easy remodel or new construction installation.




FEATURES

- 5-CCT Switchable between 2700K and 5000K
- Remote driver box allows easy installation into shallow plenums
- Sold as new construction, may be configured in field for remodel
- Driver included
- 5 year warranty

SPECIFICATIONS


Construction	Die-cast Aluminum
Power:	12W
Input:	120-277 VAC,50/60Hz
Dimming:	ELV: 100-5% , TRIAC: 100-5%
Light Source:	Integrated LED
Lens:	Frosted TIR lens
Rated Life:	50,000 Hours
Mounting:	New construction housings included with hanger bars
Cut Out:	4 1/8"
Finish:	Electrostatically Powder Coated: Black, White
Ceiling Thickness:	1/2" - 1 1/2"
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	ETL, cETL, Wet Location Listed, Title 24 JA8 Compliant, Airtight, IC

FINISHES:



Black White

LINE DRAWING

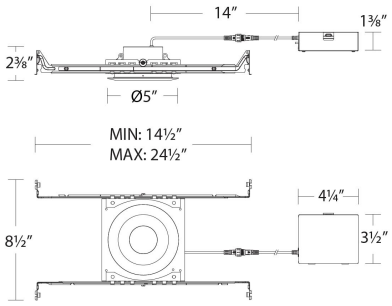

WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. May 2026