WAC LIGHTING

# Lotos Adj – Fire Rated

Adjustable Downlight 5CCT

Fixture Type:

Catalog Number:

Project:

Location:

| Model | Beam | Color Temp & CRI | Lumens | Watt | Finish |
|---|---|---|---|---|---|
| ❍ R4ERAR | ❍ W 45 | 2700K/3000K/3500K/4000K/5000K - 90 | 800 | 9W | ❍ FWT White (Fire Rated) |

Example: **R4ERAR-W9CS-FWT**
For custom requests please contact customs@waclighting.com

## DESCRIPTION

Fire rated to reduce the spread of flames and maintain the integrity of the ceiling.

## FEATURES

• Fire Rated - ASTM E119, UL 263, ULC S101 and tested and certified for 2 hours
• 5-CCT Switchable between 2700K and 5000K
• Multiple LED array for uniform illumination
• Rotatable multi-axis gimbal ring
• Minimum Plenum Space Required: 4 1/2"
• Driver included
• 5 year warranty



## SPECIFICATIONS


| | |
|---|---|
| **Color Temp:** | 2700K/3000K/3500K/4000K/5000K |
| **Input:** | 120-277 VAC,50/60Hz |
| **CRI** | 90 |
| **Dimming:** | ELV: 100-5% , TRIAC: 100-5% |
| **Rated Life:** | 50,000 Hours |
| **Mounting:** | Heavy gauge retention clips secures fixture to ceiling |
| **Standards:** | ETL, cETL, Title 24 JA8 Compliant, Wet Location Listed |
| **Construction** | Steel with frosted TIR lens |

## FINISHES:



White (Fire Rated)

## LINE DRAWING

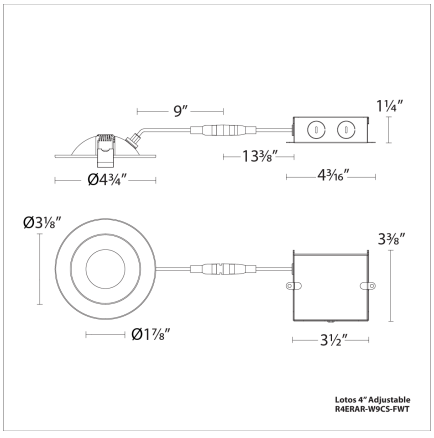




*WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. January 2026*

WAC LIGHTING

# Lotos Adj – Fire Rated

Adjustable Downlight 5CCT

Fixture Type:

Catalog Number:

Project:

Location:

| Model | Beam | Color Temp & CRI | Lumens | Watt | Finish |
|---|---|---|---|---|---|
| ❍ R6ERAR | ❍ W 45 | 2700K/3000K/3500K/4000K/5000K - 90 | 1320 | 15W | ❍ FWT White (Fire Rated) |

Example: **R6ERAR-W9CS-FWT**
For custom requests please contact customs@waclighting.com

## DESCRIPTION

Fire rated to reduce the spread of flames and maintain the integrity of the ceiling.

## FEATURES

• Fire Rated - ASTM E119, UL 263, ULC S101 and tested and certified for 2 hours
• 5-CCT Switchable between 2700K and 5000K
• Multiple LED array for uniform illumination
• Rotatable multi-axis gimbal ring
• Minimum Plenum Space Required: 4 1/2"
• Driver included
• 5 year warranty




## SPECIFICATIONS

| | |
|---|---|
| **Color Temp:** | 2700K/3000K/3500K/4000K/5000K |
| **Input:** | 120-277 VAC,50/60Hz |
| **CRI** | 90 |
| **Dimming:** | ELV: 100-5% , TRIAC: 100-5% |
| **Rated Life:** | 50,000 Hours |
| **Mounting:** | Heavy gauge retention clips secures fixture to ceiling |
| **Standards:** | ETL, cETL, Title 24 JA8 Compliant, Wet Location Listed |
| **Construction** | Steel with frosted TIR lens |

## FINISHES:

White (Fire Rated)

## LINE DRAWING

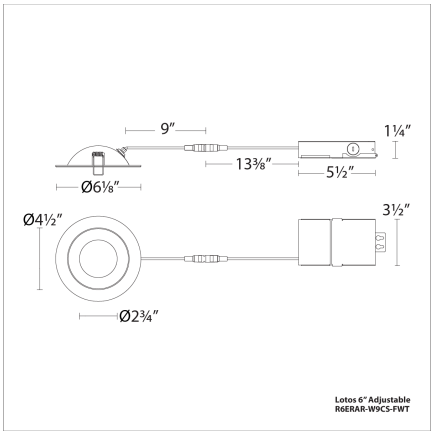




*WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. January 2026*

Fixture Type:
Catalog Number:
Project:
Location:

**ACCESSORIES**

| | *Model* | *Description* | *Finish* |
|---|---|---|---|
|  | RER-FRAME | Lotos | |


*WAC Lighting retains the right to modify the design of our products at any time as part of the company's continuous improvement program. January 2026*