Ra Wall
Assembly instructions

Attention: Read and understand these instructions before installing fixture. This fixture is intended for installation in accordance with National Electric Code and local regulation : to assure full compliance with local code and regulations, check with your local electric inspector before installation. This equipment is guaranteed only when used as indicated in the instructions; therefore they should be kept for future reference. Install where luminaire will be protected from likely damage. This fixture is ceiling mounted only.

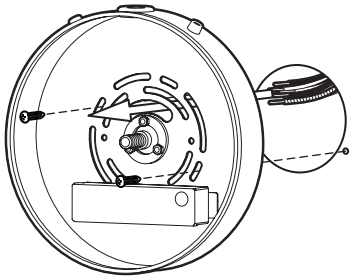## Your box should contain

1x disc

1x LED tube

1x canopy

2x cotton gloves

Tools needed, not included

-Junction box and screw
-Philips screwdriver
-Wire connectors
-Level

1 Attache ceiling's ground wire to canopy ground screw. Make sure other wires go thru canopy center hole as illustrated.

Screw canopy to junction box with the 2 required screws (not included) without fully tightening it up.
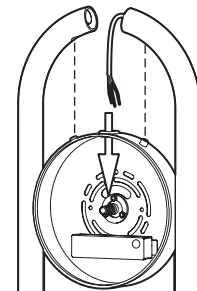
(Shut off main power at the circuit breaker panel)

2 Make appropriate connextions with wire bundle provided to ceiling wiring.
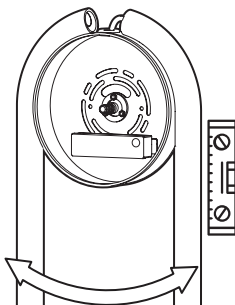
| Ceiling wires	Fixture wires		For DALI dimming 220V only	
	120V	220V		
Live	Black	Brown		
Neutral	White	Blue	Purple +	DC+
Ground	Green screw		Grey –	DC-

3 Gently install the LED tube on the canopy. Align the holes in the glass tube with the rubber bumpers on the canopy. Pass the LED tube wire connector through the top hole in the canopy.
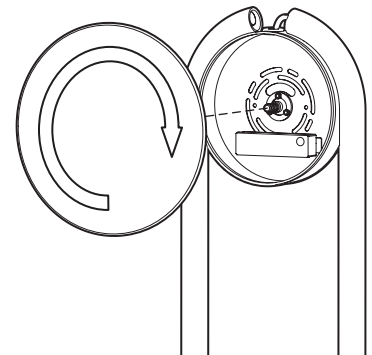
5 Adjust with level and secure by screwing in place.

6 Push the matching color wire in the proper connector, and flip the lever down.

7 Carefully screw the disk in the center of the canopy. Place a hand under the disk to avoid any falls while installing.

Use cotton gloves provided to avoid marking with fingerprints