
SHAYD PENDANT



WARNING:


Turn off power at circuit before wiring. Always consult a licensed electrician.





INSTALLATION INSTRUCTIONS


- Unroll the SHAYD shade and let it rest until completely flat, approx. 24–48 hrs, weighing it down if needed.
- 2 Unscrew the brass screw at the bottom of the diffuser, separating it from the LED board.
- 3 Remove brass screw and diffuser, set aside.
- Pull the LED board out of ceramic shade so it is approx 2 ft away from ceramic shade.
- Insert the LED board through cut-out hole in shade, aligning markings with the diagram.
- Gently fold the shade using notches as guides, DO NOT press hard or creases may form.
- Shape shade to match the shape of the ceramic form, then slide it inside the ceramic shade.

















SHAYD PENDANT



WARNING:


Turn off power at circuit before wiring. Always consult a licensed electrician.


INSTALLATION INSTRUCTIONS (CONT.)

- 8 Slide the LED board into place so it rests in the cone, with the shade positioned between the ceramic and the board.
- Adjust the placement of the LED board as needed to follow the shape of the interior of the shade.
- Insert the diffuser so it fits snugly in the fixture, with the hole aligned to the metal standoff. Secure it in place with the brass screw.
- Adjust placement of the diffuser as needed so it follows the shape of the interior of shade.





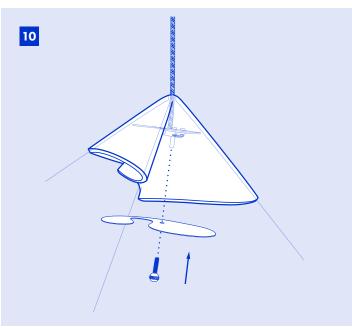

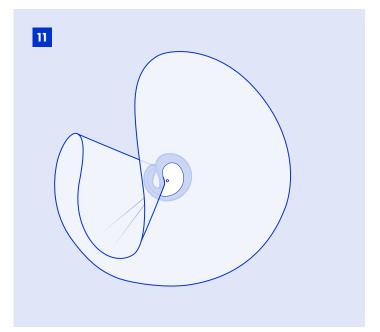

SHAYD PENDANT



WARNING:

Turn off power at circuit before wiring. Always consult a licensed electrician. Thread cord through canopy and crossbar, make electrical connections, and place driver into J-box. Attach crossbar to J-box, and attach canopy.

