



PONTE 7 TASK SCONCE

SLTS678

General Product Information



Please Note:
This fixture should not be used with a standard wall switch or dimmer.

Suggested/Required Tools




Safety Information

CAUTION-RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.



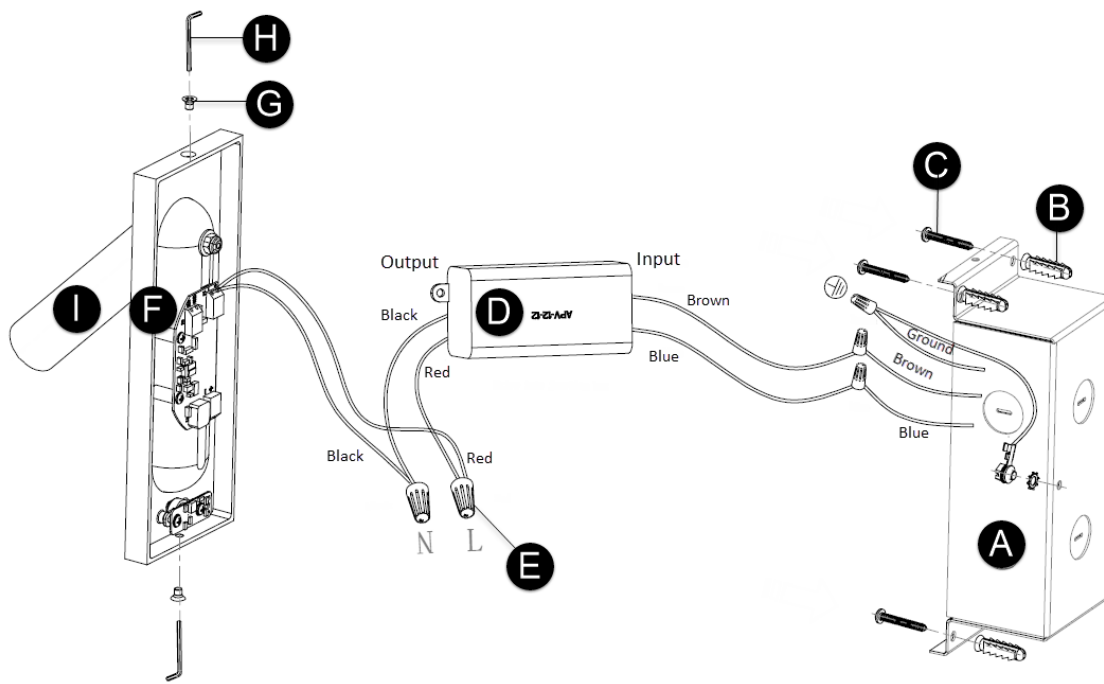

FIXTURE PARTS

- A. Junction Box with Attached Mounting Plate (Included)
- B. Anchors
- C. Anchor Screws
- D. Driver
- E. Wire Nuts/Wire Nut Connections
- F. Fixture Backplate/Base
- G. Fixture Screws
- H. Allen Wrench
- I. Fixture Head

INSTRUCTIONS

I. Preparing for Installation

1. Carefully unbox and examine all items included in the fixture's packaging.
2. Separate the mounting plate from the fixture's backplate by removing the fixture screws.

II. Wiring the Fixture & Installing the Mounting Plate

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits, ensuring there's no electricity running through the wiring.
2. To install a junction box with an attached mounting plate, do the following:
 - a) Mark the anchor locations on the wall.
 - b) Drill holes at the marked locations and install the anchors.
 - c) Align the junction box and secure it with anchor screws, ensuring it is level and tightly fixed in place.
3. Connect the LED driver input wires to the local power line wires. Twist the bare ends of the following pairs of wires together using a wire nut to secure the connection:
 - a) Neutral driver wire (blue) to neutral power line wire.
 - b) Hot driver wire (brown) to hot power line wire.
4. Place the driver in the junction box, ensuring the output driver wires are accessible.
5. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to a suitable ground. This may be a green ground screw on the mounting plate, to which the ground wire should be tightly wrapped, or to a house wire (green or bare copper wire without insulation).
6. Twist the bare ends of the following pairs of wires together using a wire nut to secure the connection:
 - a) Black (negative) driver wire (output) to black fixture wire.
 - b) Red (positive) driver wire (output) to red fixture wire.
7. Carefully tuck all the wires into the junction box.

III. Installing the Fixture

1. Place the fixture backplate/base onto the mounting plate portion of the junction box and secure it in place with the fixture screws.
2. Pivot the fixture head (up and down: up to 90°/right and left: 60°) to direct the light as desired.