Solis Flush Installation Guide

Pablo[®]

PAGE 1/2

CAUTION - We recommend this fixture be installed by a licensed Electrician.

Before assembling and installing this product, carefully read the following:

- When installing multiple lamps; these fixtures must be wired in parallel in order to achieve the best possible light quality from each lamp. Wiring in series will result in the progressive loss of performance as the lamps move further away from the building power.
- Switch off power to the junction box before installing the lamp.
- Move light switch into the OFF position.
- When mounting to the ceiling, always use appropriate anchoring hardware.
- We recommend reading the guide before you begin installation.
- Installation Guides can be downloaded from Pablodesigns.com in the case this document is lost or damaged.
- Do not dissassemble, modify or try to repair this fixture! In order to recieve technical assistance contact Pablo Designs. Any modification to the fixture will nulify the manufacturer's warranty.

CLEANING INSTRUCTIONS:

 Use only a soft cloth to clean this fixture, dampened with water or mild cleanser if required, DO NOT use alcohol, solvents, or other abraisive cleaners, as this could damage the lamp finish.


TECHNICAL SPECIFICATIONS

BULB TYPE: E26/PAR30 LED

11 Watt 3000K 1000 Lumens

Contents

SOLIS FLUSH SHIPS IN MULTIPLE BOXES IN ORDER TO ENSURE THE SAFETY OF ALL COMPONENTS.

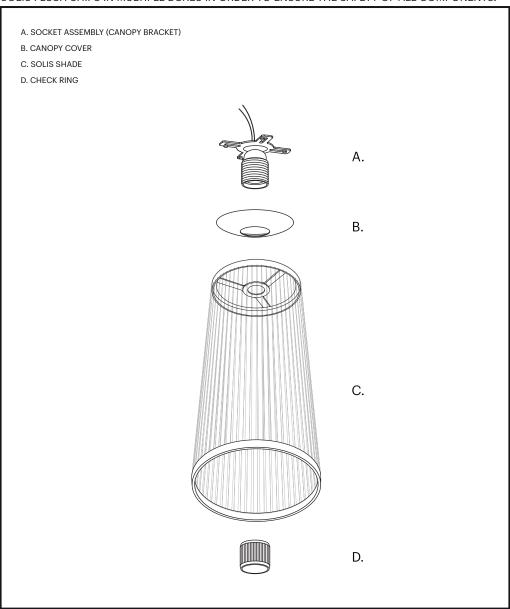

IF THERE ARE MISSING OR DAMAGED PARTS, PLEASE CONTACT US AS SOON AS POSSIBLE TO FILE A REPORT. CLEAR PHOTOS AND DESCRIPTIONS WILL ENABLE OUR CUSTOMER SERVICE TEAM TO QUICKLY AND EFFECTIVELY ADDRESS YOUR CLAIM.


(415) 865-5000 888 MARIN STREET SAN FRANCISCO, CA 94124 INFO@PABLODESIGNS.COM [INFO@PABLODESIGNS.EU]

Solis FlushInstallation Guide


Pablo[®]

PAGE 2/2

Secure CANOPY BRACKET to junction box using the appropriate hardware.




Wire SOCKET to BUILDING:
[BLACK TO BLACK - LINE]
[WHITE TO WHITE - NEUTRAL]




NOTE! NEATLY TUCK WIRES AND CONNECTORS UP INTO THE JUNCTION BOX.

3 Secure CANOPY COVER to CANOPY BRACKET via magnetic connection.



4 Secure SHADE to SOCKET using the CHECK RING. Install the bulb.

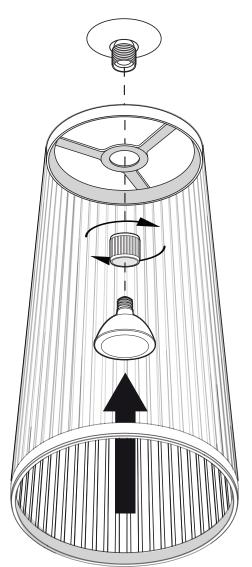

SOLIS FLUSH







24 48

