

Project:


# ALC LED Pendant Spec Sheet

SKU: 3056.25-GK25

A classic modern architectural lighting form, Architectural Lighting Cylinders are available in a [surface mount](#) configuration as well as a [sconce](#) and pendant in a variety of sizes and finishes, with multiple beam spread options and a number of glass and metal trims.

Learn more: <https://sonnemanlight.com/alc-led-pendant>

Type #:

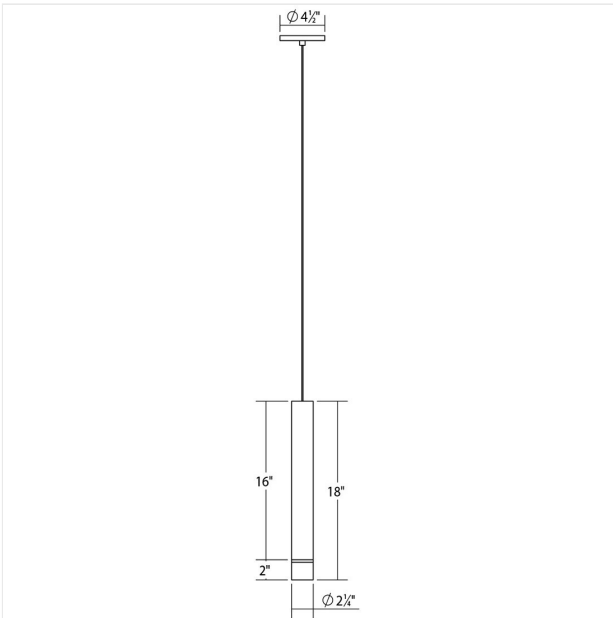

## Dimensions

Height:	18"
Diameter:	2"
Canopy/Backplate/Base:	4.5"
Hanging Details:	10' Adjustable Cord
Shape:	Etched Glass Trim
Size:	2" Tall
Canopy/Backplate/Base Height:	0.5"

## Electrical Specs

Bulb(s) Included?:	Yes
Bulb 1 Type:	Integral LED
Bulb Quantity:	1
Input Voltage:	120VAC
Wattage:	10
Initial Lumens:	1060
Delivered Lumens:	800
Kelvin:	3000K
CRI:	90
Power Supply Type:	Driver
Power Supply Quantity:	1
Power Supply Location:	Outlet Box
Dimming Type:	TRIAC/ELV
Bulb Max Wattage:	10

## Installation

Installation:	Licensed electrician required
Sloped Ceiling Compatible?:	Compatible up to 45°
Cord Length:	10 ft
Minimum Hanging Height:	18.5"
Maximum Hanging Height:	138.5"

## Shade

Lens Type:	25 Narrow Flood Lens
Shade Material:	Etched Glass

## General Listings

Features:	Damp Rated
Certification:	C-ETL-US
Color/Finish:	Satin Black (.25)

## Available Finishes

Available Finishes:	Polished Chrome w/Etched Glass Trim, Satin Black w/Bezel Trim, Satin Black w/Clear Ribbon Glass Trim, Satin Black w/Etched Glass Trim, Satin Black w/Etched Ribbon Glass Trim, Satin Black w/Snoot Trim
---------------------	---

## Available Color Temperatures

Available Color Temperatures:	3000k
-------------------------------	-------

## Options In This Family

SKU	Size	Wattage	CRI	Delivered Lumens
3055.XX-BK25	2" Small	10	90	800
3057.XX-SK25	3" Small	20	90	1400
3057.XX-SK25-J20	3" Small w/20" Cord			
3058.XX-FK25	3" Medium	20	90	1400
3058.XX-FK55	3" Medium	20	90	1400
3059.XX-CK25	3" Tall	20	90	1400
3059.XX-GC25	3" Tall	20	90	1400
3059.XX-GC25-J20	3" Tall w/20" cord	20	90	1400