



Levels Ceiling 2 Bodies Ø320mm + Ø220mm

Typology: Surface-mounted ceiling light

Designed by: Nahtrang Studio

Surface-mounted ceiling light Levels Ceiling 2 Bodies Ø320mm + Ø220mm LED 28W SW 2700-3000-4000K
PHASE CUT/O-10V/ELV Black 1850lm

Technical features

Lampholder: LED

Total power consumption of light (W): 28

Delivered lumens: 2035 (3000K)

Correlated Colour Temperature (CCT):

SW 2700-3000-4000K

Lens / Reflector Angle: HORIZONTAL 101°

Structure Material: Steel

Structure Finish: Black 

Diffuser Material: Glass

Diffuser Finish: Green 

Voltage / Frequency: 110-277V ~ 50/60Hz

Useful life: 50,000h L80B20

Dimming protocol: PHASE CUT/O-10V/ELV

Warranty: 5 years

Easily recyclable luminaire

Lampholder	Quantity	Light source power (W)
LED	1	24.4W

Logistics

Net weight (lb): 9


Packaged weight (lb): 12

Packaging (in): 18 7/8" x 18 7/8" x 16"

IP20 CRI92



Export date: 09/24/26

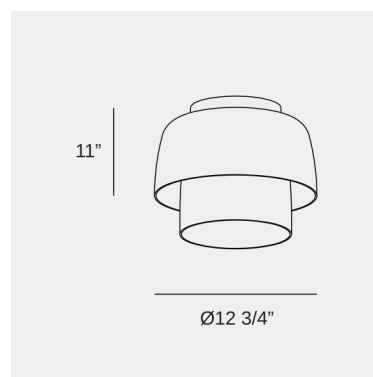



Levels Ceiling 2 Bodies Ø420mm + Ø320mm

Typology: Surface-mounted ceiling light

Designed by: Nahtrang Studio

Surface-mounted ceiling light Levels Ceiling 2 Bodies Ø420mm + Ø320mm LED 28W SW 2700-3000-4000K
PHASE CUT/O-10V/ELV Black 1850lm

Technical features

Lampholder: LED

Total power consumption of light (W): 28

Delivered lumens: 2035 (3000K)

Correlated Colour Temperature (CCT):

SW 2700-3000-4000K

Lens / Reflector Angle: HORIZONTAL 101°

Structure Material: Steel

Structure Finish: Black 

Diffuser Material: Glass

Diffuser Finish: Green 

Voltage / Frequency: 110-277V ~ 50/60Hz

Useful life: 50,000h L80B20

Dimming protocol: PHASE CUT/O-10V/ELV

Warranty: 5 years

Easily recyclable luminaire

Lampholder	Quantity	Light source power (W)
LED	1	24.4W

Logistics

Net weight (lb): 11

Packaged weight (lb): 15

Packaging (in): 40 1/8" x 24" x 16 1/2"

IP20 CRI92



Export date: 09/24/26

