


## ASSEMBLY INSTRUCTION MODEL # TAL-9404-MT




All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate Local electrical codes.




You will need 5 -Candelabra Base Bulb  
40 Watts recommended 60 Watts Max.  
USE LED BULBS FOR EXTENDED USE  
THIS FIXTURE IS DAMP RATED

### How to Install

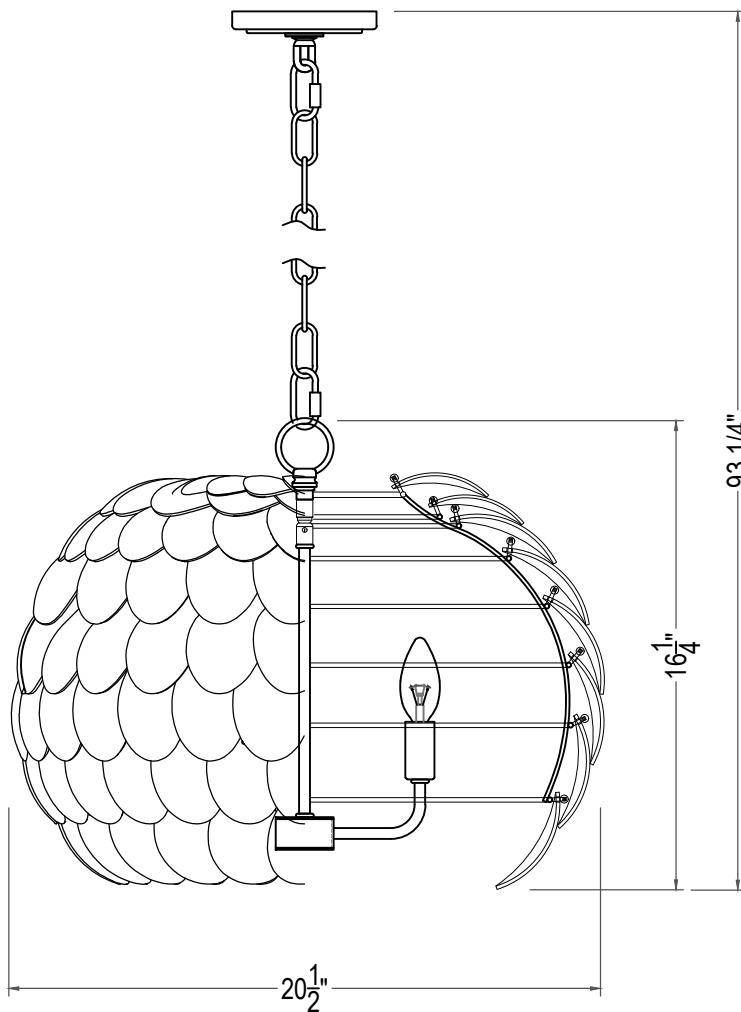


1. Decide the preferred hanging height and choose the correct chain length needed.
2. Screw the loop onto the top of the fixture.
3. Feed the wire through the chain links. Using the quick links, attach one end of the chain link to the collar loop and the other end to the loop.
4. Raise the fixture up and do the wire connection. Secure the canopy with the collar ring.
5. Starting from the bottom (Tier#1) , insert Coco Shell (H) onto the frame stud and secure in place using a ball nut. Continue until you are completed with Tier#6.
6. At the top of the frame (Tier #7 and #8), Insert Coco shell (I) onto the frame stud and secure in place using a ball nut.

PART NUMBER MODEL # TAL-9404-MT

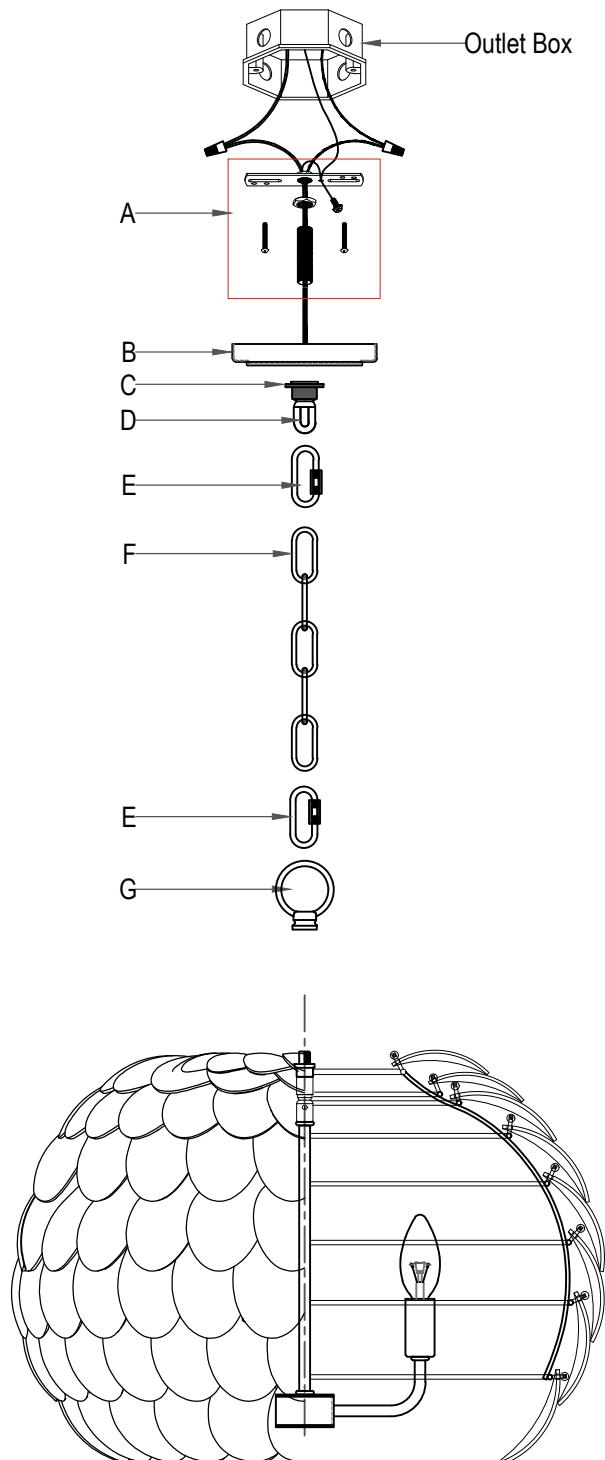

## Part Number

- A. (1) - Mounting Hardware
- B. (1) - Canopy(W5.0",H0.8") #XLF9404MTCAN5IN
- C. (1) - Collar Ring
- D. (1) - Collar Loop
- E. (2) - Quick Link(5mm)
- F. (1) - Hanging Chain(72",4.5mm) #XLF9404CHA4.5MM
- G. (1) - Loop - #XLF9404MTLOOP
- H. (152) - Coco shell (W2.75",L4.0")#XLF9404SHELL4IN
- I. (32) - Coco shell(W2.375",L3.375")#XLF9404SHELL3.375IN

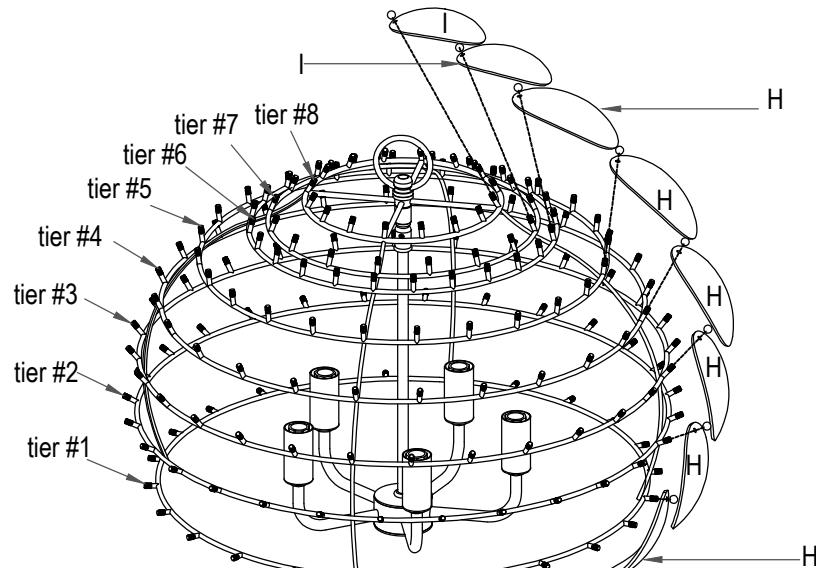

 **WARNING:** This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).