





LIGHTING THE WAY FOR SIXTY YEARS



ASSEMBLY INSTRUCTION MODEL #TRL-2805-LG

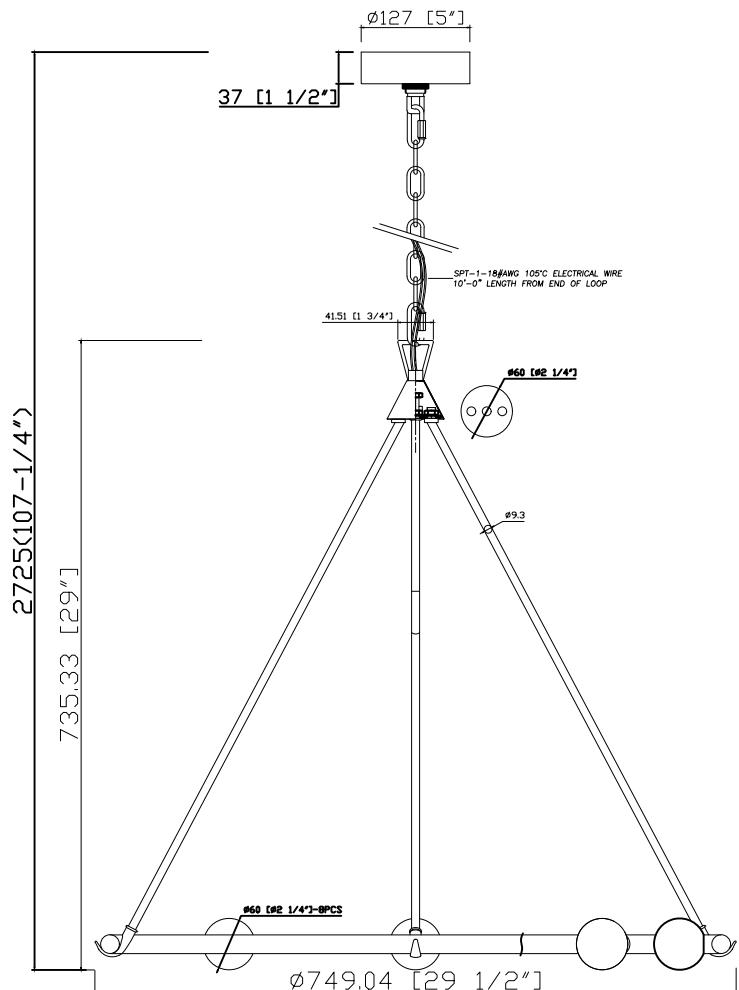

All electrical components must be installed by a licensed electrician in accordance with the National Electric Code and the appropriate local electrical codes.




You will need 8 - 1.5Watts G4 LED bulb included

THIS FIXTURE IS Damp RATED

How to Install

1. Remove the loop to take the distributor box cover off.
2. Take one long rod , locate the side with the threaded nipple.and insert it over the metal plate on the distributor box. Secure with the hex nut.(Please do not tighten it until the rod is attached onto the frame ring.)
3. Take one short rod and screw it onto the cluster underneath the distributor box.Repeat this process for another short rod.
4. Spread all four rods out at equal spacing and remove the flat head screws from the hook end of the rods.Set them aside for use on the next steps.
5. Slide the frame ring over the distributor box and let the raised stud on the hook of the rod insert into the ring. Secure the rod with the flat head screws. Please be careful not to damage the wire in the process of fixing the rod.
6. Tighten the hex nuts to fix the rods and put the distributor box cover back.Secure with the fixture loop.
7. Decide the preferred hanging height and choose the correct length of chain needed.
8. Install the mounting bracket onto the outlet box.
9. Raise the fixture up and do the wire connection as illustrated.Insert the driver carefully on the mounting bracket to prevent the wires from disconnecting.Secure the face plate and canopy with the collar loop ring.
10. Install the bulb onto the socket.
11. Place the glass over the socket and push it inwards to snap on. Please make sure the glass is snapped on by gently pulling it.If it stays in place, the installation is completed.

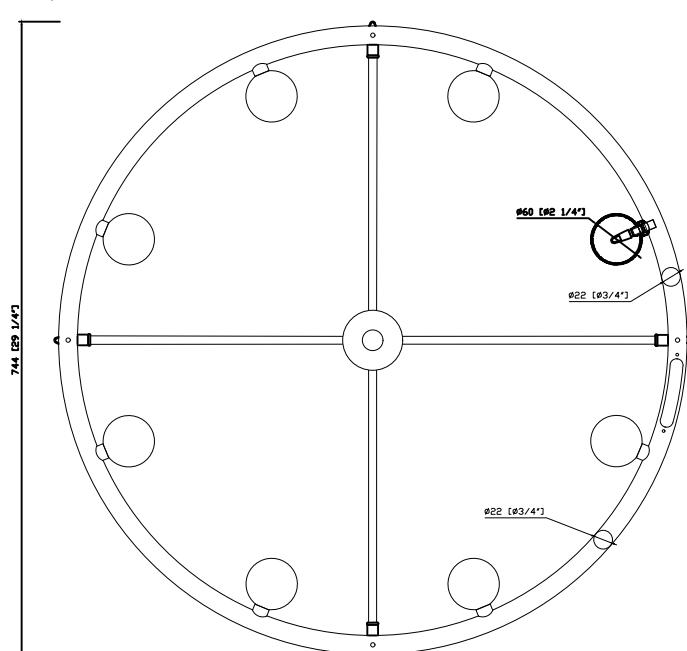


WARNING: This product can expose you to Lead, which is known to the State of California to cause cancer and/or birth defects or reproductive harm. For more information go to www.P65Warnings.ca.gov



LIGHTING THE WAY FOR SIXTY YEARS



ASSEMBLY INSTRUCTION MODEL #TRL-2805-LG

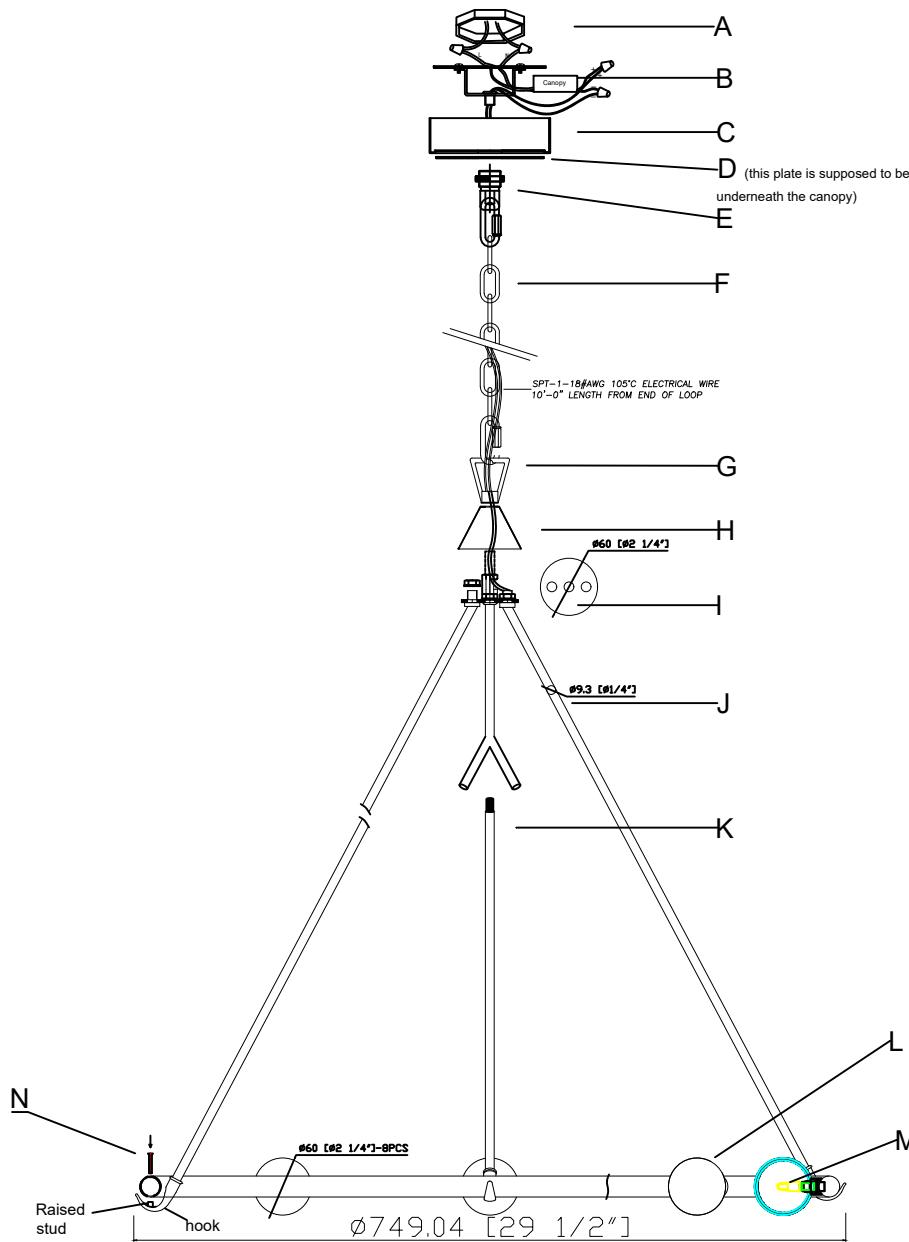


Part Number

Part Numbers

- A. (1)-Mounting hardware
- B. (1)-Driver (AC110V-DC12V-20W)
- C. (1)-Canopy(XAR2805LGCAN5IN)
- D. (1)-face plate(XAR2805LGCAN4.5IN)
- E. (1)-Collar loop and ring
- F. (1)-Chain (XAR2805LGCHA4MM)
- G. (1)-Loop(XAR2805LGCHA1.75IN)
- H. (1)-Distributor box cover
- I. (1)-Metal plate
- J. (2)-Long Rod (XAR2805LGHAL28.25IN)
- K. (2)-Short Rod (XAR2805LGHAL21IN)
- L. (8)-Glass(XAR2805LGGLA2.25IN)
- M. (8)-G4 LED bulb
- N. (4)-Flat head screws

Wiring Diagram

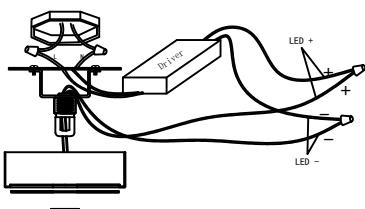

Assembly Diagrams of Rods

