

4" FreeJack Canopy**700FJ4SQ_220, 700FJ4RF_220** 1.2**VISUAL COMFORT & CO.**

MODERN COLLECTION

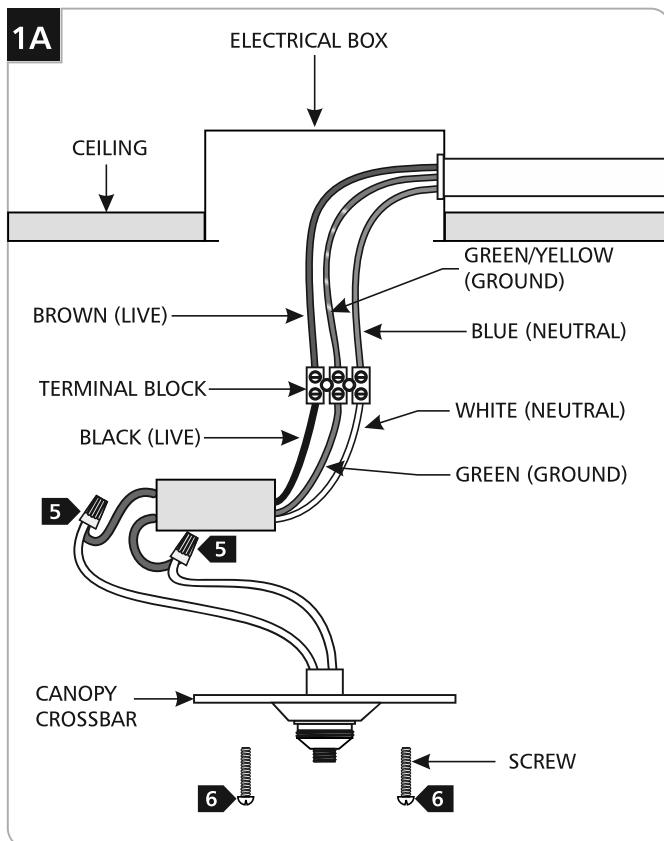
GENERAL PRODUCT INFORMATION:

This product meets CE IP20 requirements.

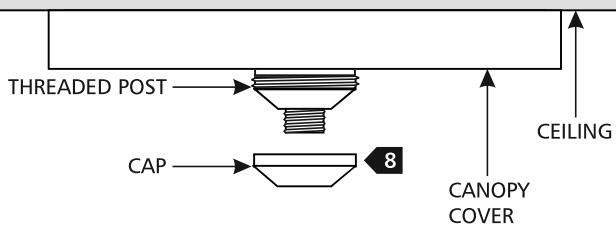
This product must be installed using an electrical box. Minimum volume of the electrical box must be 6 cubic inches (98 cubic centimeters).

This product can be dimmed with a low-voltage electronic dimmer and has a rated maximum output of 60 watts.

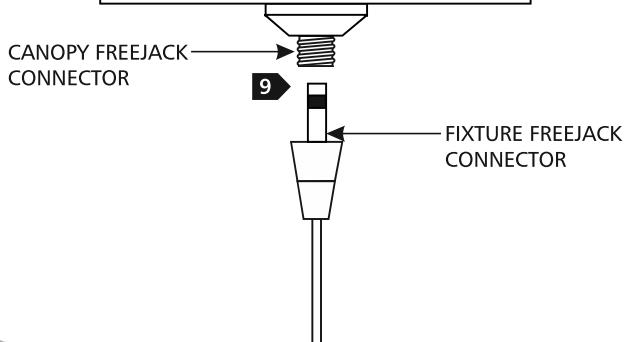
For Wood Canopies: Do not install any head or pendant closer than 12 inches to this canopy the lamp may damage the wood finish.



- 1 Connect the green/yellow (ground) wire to the green wire by using a port on the terminal block.
- 2 Connect the blue (neutral) 220-240V wire to the white wire by using a port on the terminal block.
- 3 Connect the brown (live) 220-240V wire to the black wire by using a port on the terminal block.
- 4 Place the transformer and all the wires inside the electrical box.
- 5 Connect the canopy wires to the other two transformer wires with wire nuts.
- 6 Mount the canopy crossbar to the electrical box with the two screws.

1B

8 ► Place the canopy cover over the crossbar and screw the cap onto the threaded crossbar post.

1C

9 ► Screw the Fixture FreeJack male connector into the FreeJack female connector.

SAVE THESE INSTRUCTIONS!**VISUAL COMFORT & CO.****7400 Linder Ave, Skokie, IL 160077****800.969.3347****www.visualcomfort.com**

©2023 Visual Comfort & Co.. All rights reserved. The Visual Comfort & Co. logo is a registered trademark of Visual Comfort & Co. Visual Comfort & Co. reserves the right to change specifications for product improvements without notification