

ENTRA™ 3" LED

REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH

The ENTRA 3" Remodel Adjustable LED downlight offers a cost-effective alternative to meet residential and commercial specifications on budget-sensitive projects. Custom engineered for high performance and reliability, ENTRA is easy to configure with a complete feature set that offers flexibility without an overwhelming list of options. ENTRA LED modules are available in high or low output, with 4 color temperatures and include 20°, 40°, and 65° interchangeable optics with hot-aiming (30° tilt; 359° rotation). Flanged or Flangeless (includes mud plate), round or square, flat or beveled die-cast trims in Black and a paintable White finish.

- Hot-aiming (30° tilt; 359° rotation)
- Flanged or flangeless ceiling appearance
- 20°, 40°, and 65° interchangeable optics (all included)
- Accepts 2 optical controls
- Warm color dimming 3000K-1800K
- 1-step static white and 2-step warm dim color binning
- Standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming down to 1%



3" REMODEL ADJUSTABLE

LUMEN MULTIPLIER (CRI/CCT)

CCT	90 CRI MULTIPLIER
2700K	0.95
3000K	1.00
3500K	1.05
4000K	1.07

SPECIFICATIONS

	HIGH OUTPUT	LOW OUTPUT	WARM DIM	
			HIGH OUTPUT	LOW OUTPUT
DELIVERED LUMENS	1311	980	925	715
WATTS	18	12	18	12
EFFICACY	73	82	49	59
CRI	90			
CBCP (AT 3000K)	20° - 4,994 40° - 2,544 65° - 1,091			
CCT	2700K, 3000K, 3500K, or 4000K		3000K - 1800K	
COLOR CONSISTENCY	1-step		2-step	
VOLTAGE	Universal 120V or 277V			
DIMMING¹	Standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming down to 1%			
POWER SUPPLY	Constant current driver with +.9 power factor and >87% efficiency			
OPTICS	20°, 40°, and 65° (all included)			
ADJUSTABILITY	0-30° tilt, 359° rotation			
CEILING APPEARANCE	Flanged or flangeless			
CEILING THICKNESS	Flanged or flangeless: 1/2" to 1"			
CEILING APERTURE	4" ceiling cutout			
HOUSING	Non-IC			
CONSTRUCTION	Trim: Die-cast aluminum			
FINISH	Housing: Black powder coat Trim: Black or White (paintable)			
GENERAL LISTINGS	ETL Listed. Damp Location. Shower version Wet Listed.			
L70	50,000 hours min			
WARRANTY²	5 years			

Data in chart reflect 3000K/90 CRI values unless noted.

Ordering grids available on page 2.

Accepts two optical controls and an optional trim-mounted lens.

¹See visualcomfort.com for dimmer compatibility.

²Visit visualcomfort.com for specific warranty limitations and details.



©2023 Visual Comfort & Co. All rights reserved. The Visual Comfort & Co. logo is a registered trademark.
Visual Comfort & Co. reserves the right to change specifications for product improvements without notification.

UPDATED 11/15/23

ENTRA™ 3" LED

REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH

ORDERING GRIDS

HOUSING

PRODUCT	LAMP	CRI	TEMPERATURE	BEAM	FUNCTION	HOUSING RATING	VOLTAGE
EN3RR ENTRA 3" ROUND REMODEL	-LH HIGH OUTPUT	9 90 CRI	27 2700K, 1-STEP STATIC WHITE	A 20° - 40° - 65°¹	A ADJUSTABLE²	N NON-IC	120 VOLT (LEAVE BLANK)
EN3SR ENTRA 3" SQUARE REMODEL	-LO LOW OUTPUT		30 3000K, 1-STEP STATIC WHITE				-277 277 VOLT
			35 3500K, 1-STEP STATIC WHITE				
			40 4000K, 1-STEP STATIC WHITE				
			WD WARM DIM (3000K-1800K), 2-STEP				
	-	9		A	A	N	

Includes an LED driver with universal input 120V-277V, dimmable by reverse-phase, forward-phase, TRIAC, or 0-10V controls. 277V is only compatible with 0-10V dimming. Housing ships with plaster plate for use on flangeless installation. Do not use plate for flanged installs. Trims are required and must be ordered separately. ¹A - LED module ships with 40° optic installed. Includes 20° and 65° optics as well. ²A - Use with 40° optic and adjust to 30° tilt for wall wash.

TRIM

PRODUCT	CEILING APPEARANCE	STYLE	APERTURE	FINISH
EN3R ENTRA 3" ROUND	L FLANGELESS	B BEVEL	-O NO LENS	B BLACK
EN3S ENTRA 3" SQUARE	L15 FLANGELESS 1" - 1.5" CEILING THICKNESS	F FLAT	-S SHOWER (SOLITE LENS)²	W WHITE (PAINTABLE)
	F FLANGED 0.5" - 0.75" CEILING THICKNESS	W WALL WASH¹	-W WALL WASH (LENSED)¹	
	F1 FLANGED 0.75" - 1" CEILING THICKNESS			
	F15 FLANGED 1" - 1.5" CEILING THICKNESS			
			-	

¹W - Wall wash style trim can only be used with wall wash lensed aperture (-W). ²S - Shower Solite lens aperture requires bevel trim (B). Shower lens includes a gasket.

LENSES/LOUVERS¹

PRODUCT	
140MR16SF	SOLITE SOFT FOCUS LENS
140MR16SB	SANDBLASTED LENS
140MR16LL	LINEAR SPREAD LENS
140MR16DF	DIFFUSER SPREAD LENS
140MR16GL	CLEAR GLASS LENS
700A02-BK	EGGCRATE/HEXCELL LOUVER


¹For additional lenses, louvers, optical controls and accessories, reference visualcomfort.com. Lens/louvers mounted to lamp assembly only (max 2).

ENTRA™ 3" LED


REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH

TRIMS


FLANGED




ROUND BEVEL




SQUARE BEVEL




ROUND FLAT



SQUARE FLAT




ROUND WALL WASH




SQUARE WALL WASH


FLANGELESS




ROUND BEVEL



SQUARE BEVEL



ROUND FLAT



SQUARE FLAT



ROUND WALL WASH



SQUARE WALL WASH

FINISH




BLACK



WHITE
(PAINTABLE)


MECHANISM

ROUND

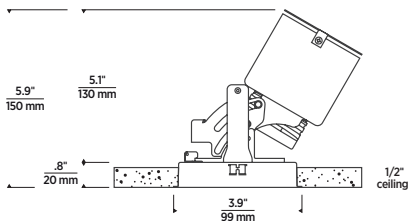

SHOWN AT FULL TILT (30°)
SHOW WITH SHORT COLLAR:
ACCOMMODATES 1/2" - 5/8" CEILING HEIGHTS

SQUARE

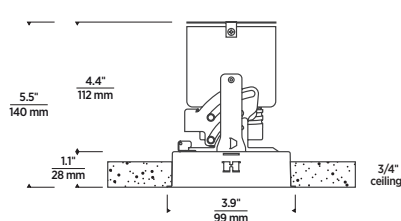

SHOWN AT NO TILT (0°)
SHOW WITH TALL COLLAR:
ACCOMMODATES 3/4" - 1" CEILING HEIGHTS


SHIPS WITH A SHORT COLLAR AND A TALL COLLAR TO ACCOMMODATE DIFFERENT CEILING HEIGHTS

ENTRA™ 3" LED

REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH


PLASTER PLATES

DIE CAST



ROUND DIE CAST


(INCLUDED FOR FLANGELESS INSTALLATION)



SQUARE DIE CAST

(INCLUDED FOR FLANGELESS INSTALLATION)

DRIVER

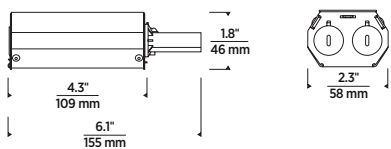


ENTRA™ 3" LED

REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH


WALL WASH PERFORMANCE

2' FROM WALL

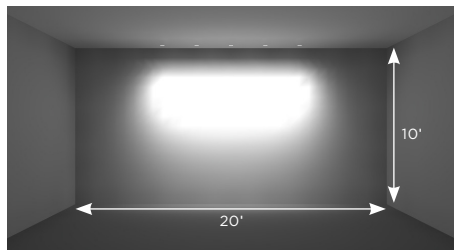


2' ON CENTER, 5 FIXTURES

2.5' FROM WALL

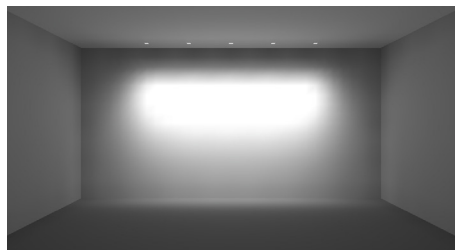

2.5' ON CENTER, 5 FIXTURES

3' FROM WALL

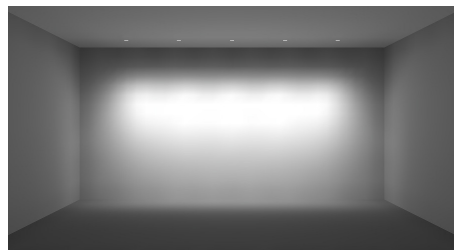

3' ON CENTER, 5 FIXTURES

FOOT-CANDLES ON WALL FROM MULTIPLE FIXTURES

HEIGHT ON WALL	2' FROM WALL								
	└─2'─┐ on center			└─2.5'─┐ on center			└─3'─┐ on center		
10'	25.8	28.2	25.8	28.4	18.8	28.4	29	12.4	29
9'	43.8	53.2	43.8	48.9	40	48.9	50.8	28.6	50.8
8'	32.2	41.6	32.2	33.6	34.2	33.6	33.7	27.4	33.7
7'	20.1	25.9	20.1	20.2	22.5	20.2	19.9	19	19.9
6'	12.2	15.4	12.2	12.1	13.8	12.1	11.8	12.2	11.8
5'	7.6	9.3	7.6	7.4	8.5	7.4	7.2	7.7	7.2
4'	4.8	5.7	4.8	4.7	5.4	4.7	4.6	5	4.6
3'	3.2	3.7	3.2	3.1	3.5	3.1	3	3.3	3
2'	2.2	2.5	2.2	2.1	2.4	2.1	2.1	2.2	2.1
1'	1.5	1.7	1.5	1.5	1.6	1.5	1.5	1.6	1.5

HEIGHT ON WALL	2.5' FROM WALL								
	└─2'─┐ on center			└─2.5'─┐ on center			└─3'─┐ on center		
10'	8.8	11.8	8.8	8.9	9.4	8.9	8.7	7.1	8.7
9'	30.6	38.6	30.6	32.9	30.7	32.9	33.6	23.4	33.6
8'	30.3	39.1	30.3	31.2	33.1	31.2	31.1	27.3	31.1
7'	22.8	28.9	22.8	22.8	25.5	22.8	22.3	22	22.3
6'	15.4	19.2	15.4	15.2	17.5	15.2	14.8	15.6	14.8
5'	10.2	12.4	10.2	10	11.5	10	9.7	10.5	9.7
4'	6.8	8.1	6.8	6.7	7.6	6.7	6.5	7.1	6.5
3'	4.6	5.4	4.6	4.5	5.1	4.5	4.4	4.8	4.4
2'	3.2	3.6	3.2	3.1	3.5	3.1	3.1	3.3	3.1
1'	2.3	2.5	2.3	2.2	2.5	2.2	2.2	2.4	2.2

HEIGHT ON WALL	3' FROM WALL								
	└─2'─┐ on center			└─2.5'─┐ on center			└─3'─┐ on center		
10'	2.7	4	2.7	2.5	3.5	2.5	2.3	2.9	2.3
9'	18.3	24.5	18.3	18.7	20.6	18.7	18.6	16.6	18.6
8'	25	32.2	25	25.4	27.7	25.4	25.2	23.3	25.2
7'	22.4	28.1	22.4	22.2	25	22.2	21.7	22	21.7
6'	17	20.9	17	16.7	19.1	16.7	16.3	17.2	16.3
5'	12.1	14.6	12.1	11.9	13.6	11.9	11.6	12.5	11.6
4'	8.5	10	8.5	8.4	9.5	8.4	8.1	8.9	8.1
3'	6	6.9	6	5.9	6.6	5.9	5.7	6.3	5.7
2'	4.3	4.9	4.3	4.2	4.7	4.2	4.1	4.5	4.1
1'	3.1	3.5	3.1	3	3.4	3	3	3.2	3

ENTRA™ 3" LED

REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH

PHOTOMETRICS

Description: 3" LED Module
20° Beam - 0° Tilt, 3000K

Model: ENTRA Adjustable 20°
Low Output

Input Power (Watts): 11.9
Input Power Factor: 0.98

Absolute Luminous
Flux (Lumens): 950

Lumen Efficacy
(Lumens per Watt): 80

Description: 3" LED Module
40° Beam - 0° Tilt, 3000K

Model: ENTRA Adjustable 40°
Low Output

Input Power (Watts): 11.9
Input Power Factor: 0.98

Absolute Luminous
Flux (Lumens): 979

Lumen Efficacy
(Lumens per Watt): 82

Description: 3" LED Module
65° Beam - 0° Tilt, 3000K

Model: ENTRA Adjustable 65°
Low Output

Input Power (Watts): 11.9
Input Power Factor: 0.98







Absolute Luminous
Flux (Lumens): 1022

Lumen Efficacy
(Lumens per Watt): 86

ANGLE	0°	45°	90°
0°	4213	4213	4213
5°	3746	3797	3620
10°	2524	2562	2359
15°	1429	1454	1292
20°	770	786	670
25°	435	439	358
30°	252	251	192
35°	132	136	99
40°	65	71	51
45°	30	38	24
50°	11	20	9
55°	5	9	4
60°	2	3	2
65°	1	1	1
70°	0	1	0
75°	0	0	0
80°	0	0	0
85°	0	0	0
90°	0	0	0

ANGLE	0°	45°	90°
0°	1822	1822	1822
5°	1771	1762	1770
10°	1624	1614	1588
15°	1413	1375	1289
20°	1130	1050	916
25°	795	700	562
30°	486	422	323
35°	267	242	175
40°	120	131	81
45°	49	65	33
50°	21	29	14
55°	10	10	7
60°	3	4	2
65°	0	2	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0
90°	0	0	0

ANGLE	0°	45°	90°
0°	691	691	691
5°	701	691	680
10°	703	696	677
15°	708	707	686
20°	698	706	683
25°	658	667	647
30°	568	580	563
35°	436	449	436
40°	275	296	285
45°	145	161	150
50°	68	72	67
55°	28	30	28
60°	3	13	5
65°	0	3	0
70°	0	0	0
75°	0	0	0
80°	0	0	0
85°	0	0	0
90°	0	0	0



ENTRA™ 3" LED

REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH







PHOTOMETRICS

Description:	3" LED Module 20° Beam - 0° Tilt, 3000K	Description:	3" LED Module 40° Beam - 0° Tilt, 3000K	Description:	3" LED Module 65° Beam - 0° Tilt, 3000K
Model:	ENTRA Adjustable 20° High Output	Model:	ENTRA Adjustable 40° High Output	Model:	ENTRA Adjustable 65° High Output
Input Power (Watts):	18.3	Input Power (Watts):	18.3	Input Power (Watts):	18.3
Input Power Factor:	0.99	Input Power Factor:	0.99	Input Power Factor:	0.99
Absolute Luminous Flux (Lumens):	1311.9	Absolute Luminous Flux (Lumens):	1306.1	Absolute Luminous Flux (Lumens):	1255
Lumen Efficacy (Lumens per Watt):	71.4	Lumen Efficacy (Lumens per Watt):	71.1	Lumen Efficacy (Lumens per Watt):	68.4

ANGLE	0°	45°	90°
0°	4994	4994	4994
5°	4241	4230	4370
10°	2808	2800	2940
15°	1686	1670	1736
20°	981	677	982
25°	570	564	546
30°	315	314	291
35°	176	178	161
40°	99	102	93
45°	56	60	53
50°	30	36	28
55°	17	20	16
60°	8	10	8
65°	2	5	1
70°	1	1	1
75°	1	1	1
80°	0	0	0
85°	0	0	0
90°	0	0	0

ANGLE	0°	45°	90°
0°	2544	2544	2544
5°	2550	2468	2426
10°	2299	2200	2134
15°	1893	1795	1711
20°	1406	1312	1217
25°	908	840	763
30°	528	492	440
35°	294	283	248
40°	155	163	136
45°	83	93	72
50°	46	52	40
55°	25	28	22
60°	10	15	8
65°	1	6	1
70°	1	1	1
75°	0	0	1
80°	0	0	0
85°	0	0	0
90°	0	0	0

ANGLE	0°	45°	90°
0°	1091	1091	1091
5°	1076	1070	1086
10°	1036	1039	1058
15°	982	985	995
20°	910	907	899
25°	811	803	774
30°	682	674	624
35°	537	525	460
40°	373	366	302
45°	234	226	179
50°	134	126	100
55°	68	65	50
60°	14	34	8
65°	1	7	1
70°	0	1	1
75°	0	1	1
80°	0	0	0
85°	0	0	0
90°	0	0	0



ENTRA™ 3" LED

REMODEL ADJUSTABLE DOWNLIGHT & WALL WASH

PROJECT INFORMATION

JOB NAME AND INFORMATION

FIXTURE TYPE AND QUANTITY

NOTES