


hollis+morris

willow pendant trio

product installation + specifications

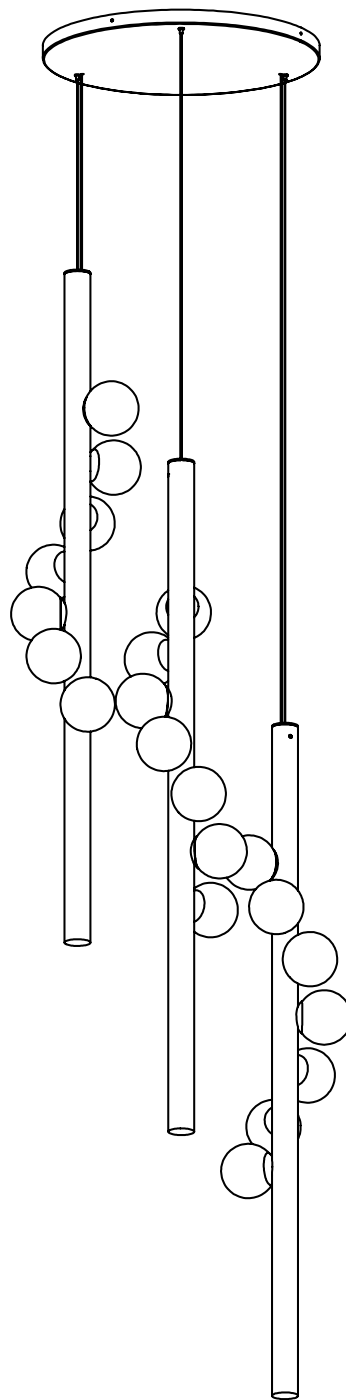

willow pendant

product code:

WILOvertical

materials:

- + solid wood
- + hand blown glass
- + metal
- + suspension hardware
- + 12v G4 LED light bulb

finish:

- + hardwax oil
- + powder coated or plated steel
- + stainless steel hardware

input:

- + 120-277V AC

driver:


- + 12V phase dimmable driver
- + ELV / 0-10 dimmable
- + driver included with canopy

output:

- + 1 W / bulb
- + 3ft: 15 W, 5ft: 21 W
- + 3ft: 1500 lm, 5ft: 2100 lm
- + 3000K with CRI of 90 or higher

suspension:

- + cord length: 10' standard
(custom lengths available)
- + 1-point suspension (per fixture)
- + single canopy connection


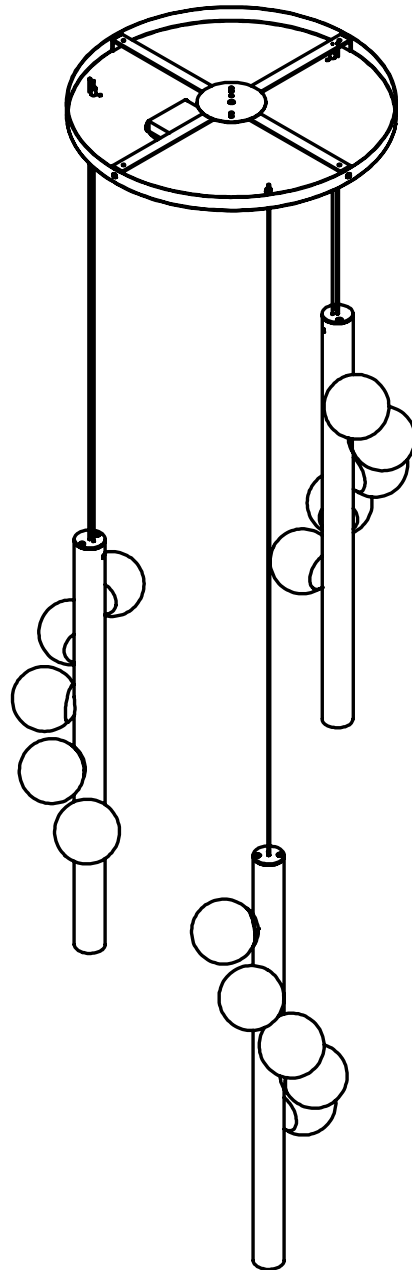


certification:




dimensions + installation

ELEVATION VIEW

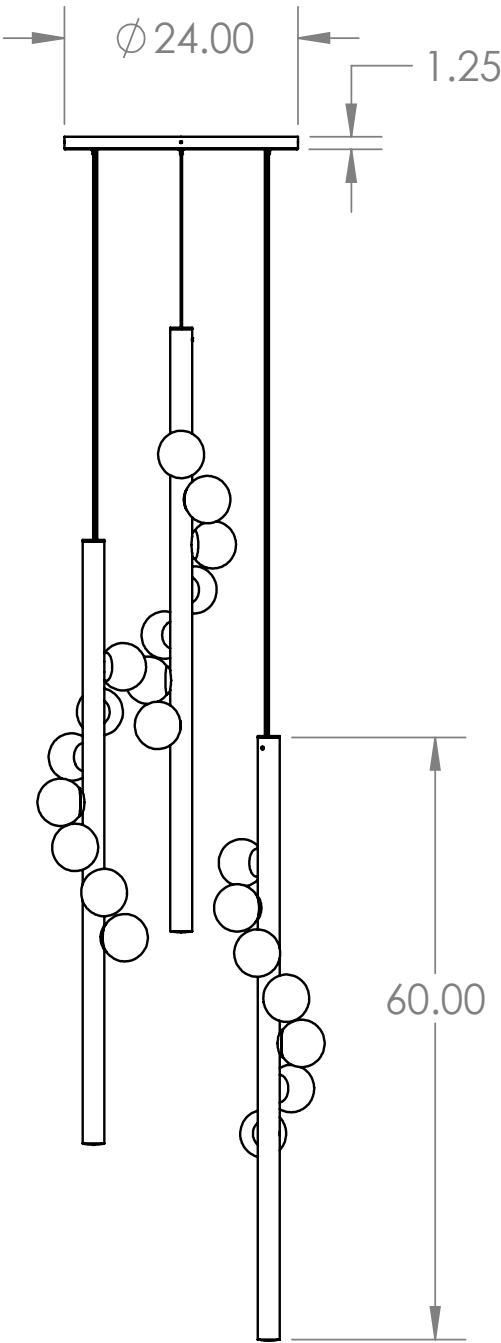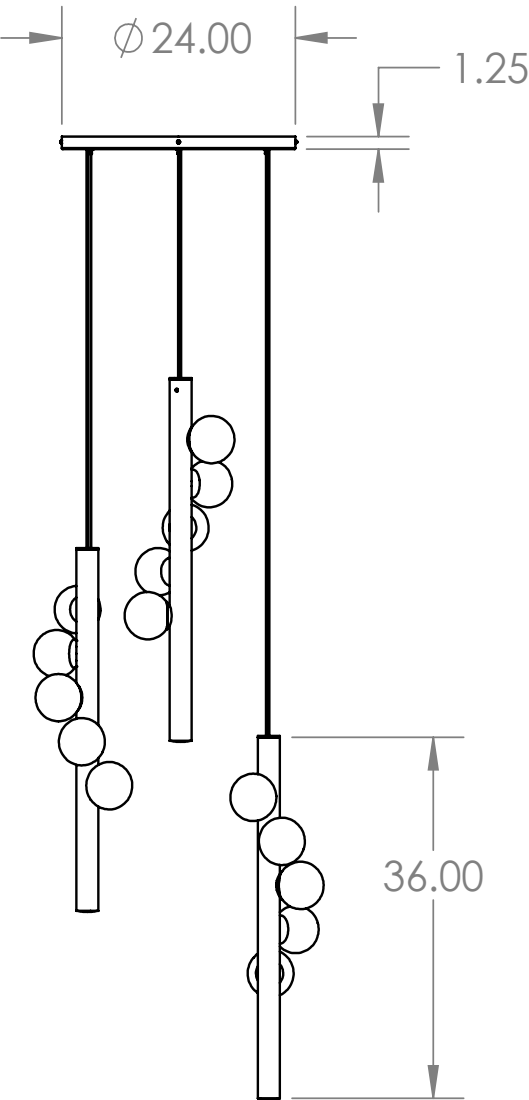


dimensions + installation

1. Locate desired canopy location on ceiling & have a certified electrician supply and install to 120V power
2. Connect braided suspension cable from fixture to canopy.
3. Feed insulated power line into canopy.
4. Connect +/- leads to 12V driver inside canopy. ***
5. Secure all connections.
6. Adjust all cables to desired heights (standard x length max. = 120")

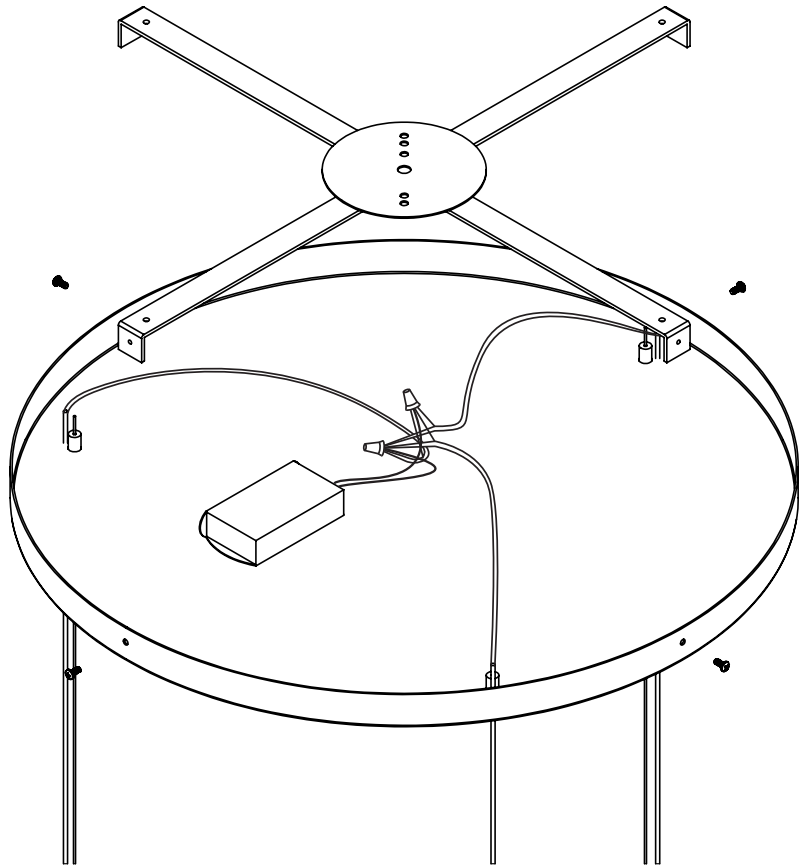


*** COAX CABLE

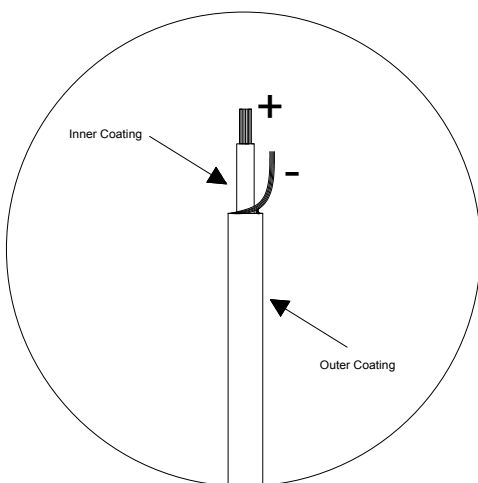

Coax cable requires stripping of outer and inner coatings to access positive and negative connection wires


dimensions + installation

CANOPY DIMENSIONS

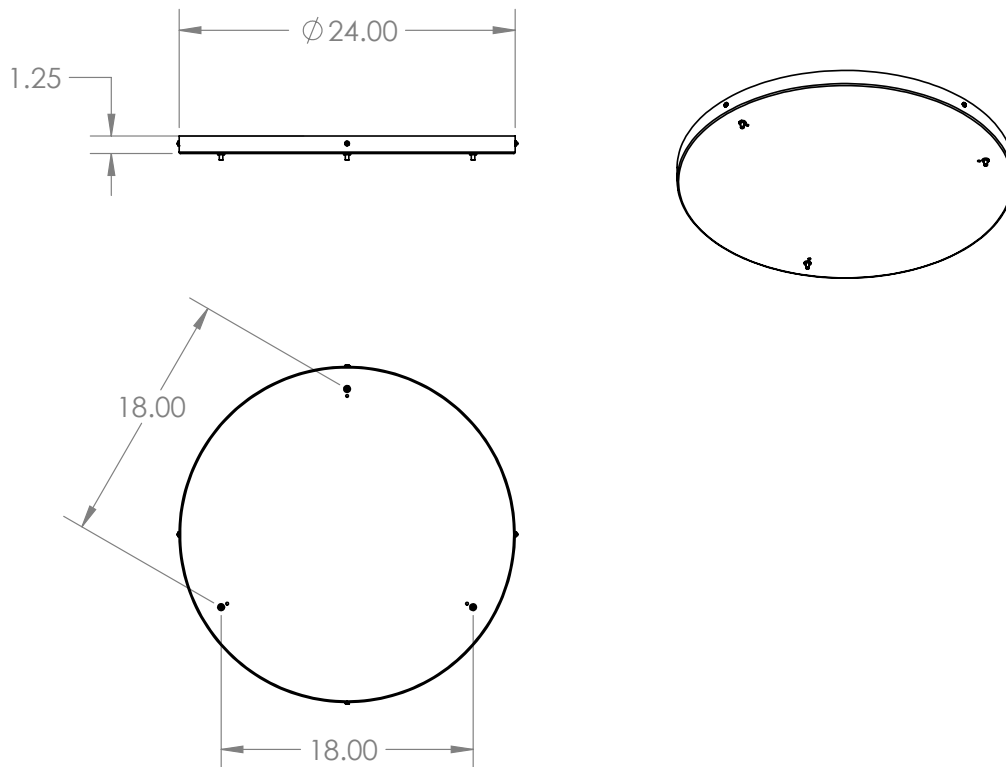

WILLOW GLASS ASSEMBLY

1. Plug G4 LED light bulbs into sockets

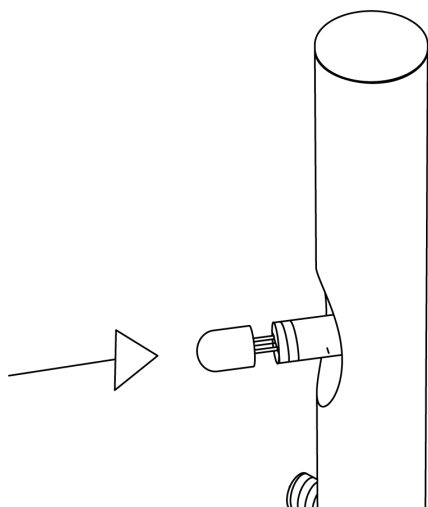

2. Twist glass orbs onto threaded rods

