

Tube

Single & Double Wall Mount 3000K

Fixture Type:

Catalog Number:

Project:

Location:

Model & Size	Color Temp & CRI	Watt	Lumens	Finish
WS-W2604 5" - 2 Lights	3000K 90 3000K 90 3000K 90	25W 33W 16W	1188 2195 1188	AL Brushed Aluminum BK Black BZ Bronze GH Graphite WT White
WS-W2605 5" - 1 Light				

Example: **WS-W2604-AL**

FEATURES


- 2605 Single, 2604 Double
- Driver concealed within the fixture
- 5 year warranty

SPECIFICATIONS

Construction:	Die-cast Aluminum
Power:	16W, 25W, 33W
Input:	120-277V, 50/60Hz
Dimming:	ELV: 100-10% , 0-10V: 100-5%
Light Source:	Integrated LED
Rated Life:	70000 Hours
Mounting:	Mounts directly to junction box, Can be mounted on wall in all orientations
Finish:	Powder Coat Graphite:Graphite, Powder Coat Graphite::Black, Powder Coat Graphite::Brushed Aluminum, Powder Coat Graphite:::Bronze, Powder Coat Graphite:::White, Powder Coat Bronze:Bronze, Powder Coat Bronze::Brushed Aluminum, Powder Coat Bronze::Black, Powder Coat Bronze:::White, Powder Coat Bronze:::Graphite
Operating Temp:	-40°F to 122°F (-40°C to 50°C)
Standards:	ETL, cETL, Wet Location Listed, IP65, Title 24 JA8 Compliant



FINISHES:

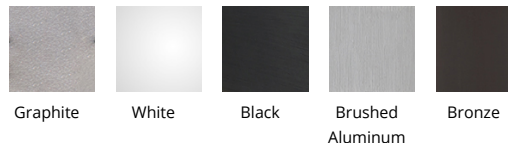

LINE DRAWING:

