




www.beachlightingusa.com

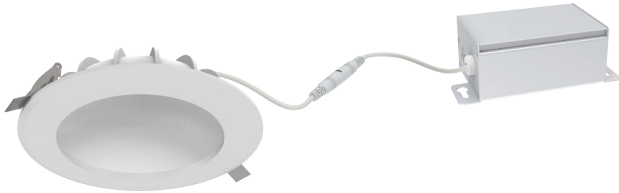

DESCRIPTION

Beach Lighting Interior Dome Lights are designed to reduce glare and improve the light quality.

Achieves soft lighting without seeing the source.

Lights are available with LED Lighting technology and offer a stylish sleek appearance.

FEATURES

Achieve soft lighting without seeing the light source.

No glare or light distortion.

Die cast aluminum body material with good heat dissipation

Higher reflection rate reflector with nano powder sprayed on surface

Use FT4 wire with high flame retardant grade independent drive junction box, easy to replace

Can be installed in 0.5" to 1.25" thick ceilings safe isolated power supply


Flicker free stable dimming, can be compatible with multi brand dimmers

MOUNTING

ETL listed to US and Canadian standards for damp location W/Feed through.

3 Years Limited Warranty.

MOUNTING

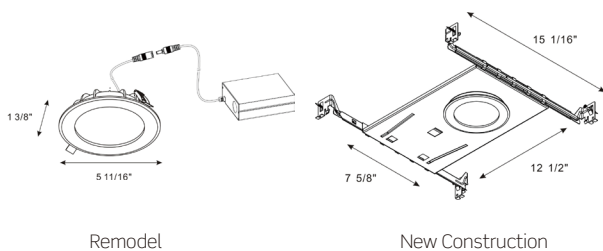

Remodel

New Construction

L4BLR-10W-3/4K-D90-MW


4" ROUND RECESSED LED DOME LIGHT

Switch-selectable color temperature

SPECIFICATION

Applications	Recessed Ceiling Mount
Wattage	10W
Light Output	730lm
CRI	>90
2 CCT	3000K/4000K
Driver Input	120V AC
Power Factor	0.98
Dimming	TRIAC Dimmers 10%-100% (120V only)
Location	Insulated Ceiling
Finish	Matte White
Certification	ETL / ENERGY STAR
Warranty	3 Year Limited for Fixture & Driver

R4-NC New Construction Plate

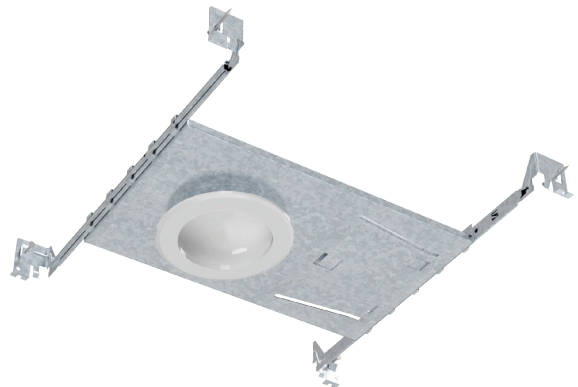

LISTING / WARRANTY




ETL listed to US and Canadian standards for damp location W/Feed through.

ENERGY STAR

3 Years Limited Warranty.

LIGHT DISTRIBUTION CURVE

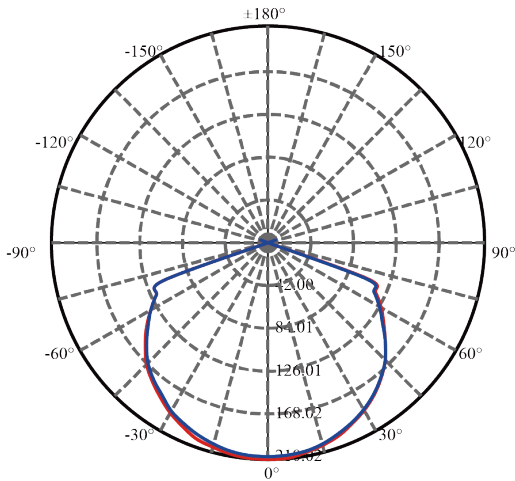

C0/C180: —
 C90/C270: —

Field angle(10%Imax):C0/180Left:74.0 Right:74.0
 :C90/270Left:74.0 Right:74.0
 Beam Angle(50%Imax):C0/180Left:70.1 Right:69.0
 :C90/270Left:70.2 Right:69.1

1.0m	210.0 , 170.1 lx	536.74cm
2.0m	52.5 , 42.5 lx	1073.48cm
3.0m	23.3 , 18.9 lx	1610.22cm
4.0m	13.1 , 10.6 lx	2146.96cm
5.0m	8.4 , 6.8 lx	2683.70cm
6.0m	5.8 , 4.7 lx	3220.44cm
7.0m	4.3 , 3.5 lx	3757.18cm
8.0m	3.3 , 2.7 lx	4293.92cm
9.0m	2.6 , 2.1 lx	4830.66cm
10.0m	2.1 , 1.7 lx	5367.40cm

Max , Ave Beam angle of C0plane139.10

OPTION



R-277V PS

- 277 V Power supply
- Non-Dimmable

APPLICATION

