

3.5 Inch

Trimless Downlight


- Durable airtight aluminum body
- Type IC, Air-Tight & Damp - No Housing Required
- Flangeless installation, to provide a higher end look.
- No housing required, easy and fast installation
- 100%-10% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- Rated for long life - over 50,000 hours



SPECIFICATIONS	
Application	Recessed Ceiling Mount
Watts	12W
CRI	90Ra+
Color Temperature(K)	5CCT Selectable 2700k to 5000k
Light Output(lm)	800lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Damp Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

ORDERING

MODELS	CCT	FINISH
RA3.5RTL-PIC-12W-5CCT-D90MW	5CCT selectable (2700-5000K)	MW(Matte White)
RA3.5STL-PIC-12W-5CCT-D90MW		

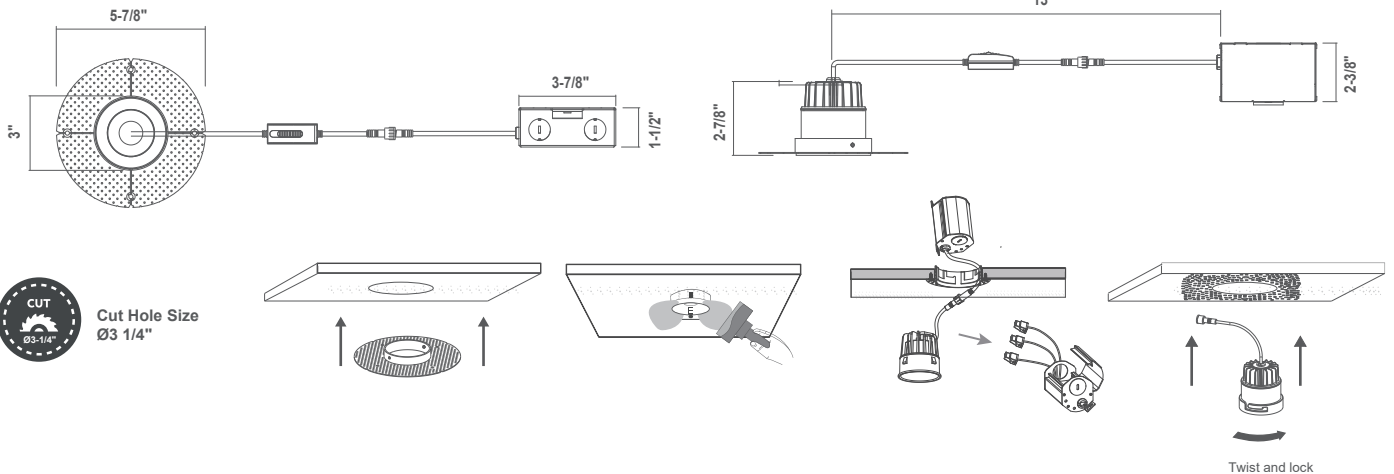

Accessories

Emergency Backup BL-ELD-15W See Page 60	Mounting Plate R3.5-NC See Page 60
-------------------------------------------------------------	--------------------------------------------------------

