


# pyrite

Design by  
Studio Dechem

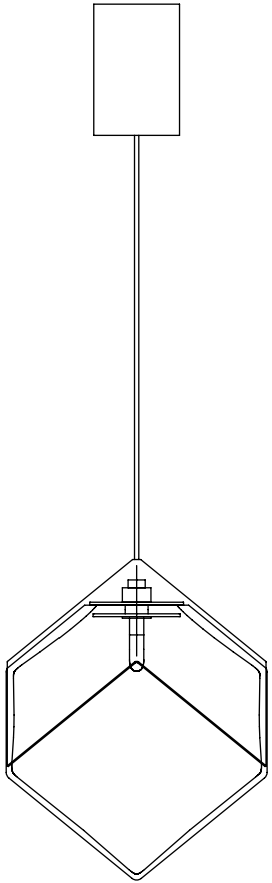

bomma

bomma.cz

TECHNICAL SHEET  
FOR PENDANT LIGHT FIXTURES


# PYRITE

## small pendant

Design by  
Studio Dechem

### Handmade glass attributes

All Bomma products are hand-made from mouth-blown lead-free crystal. Therefore any small bubbles, non-melts and irregularities in the glass are both proof and a characteristic feature of this traditional craft.

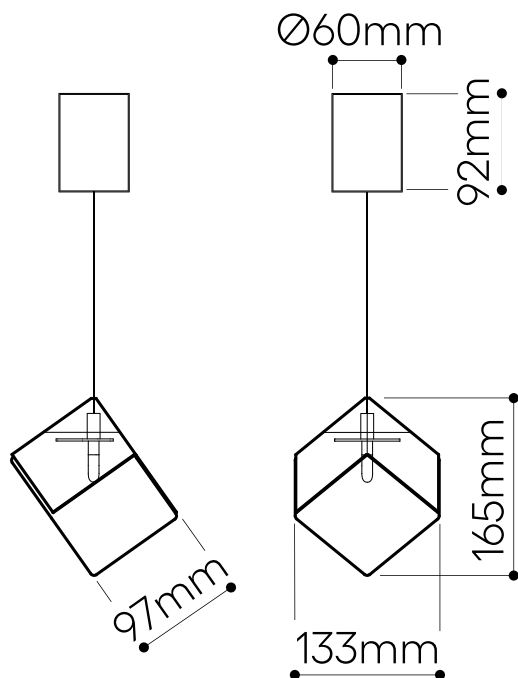

### LIGHTING DESCRIPTION

Size	133 × 153 × 165 mm 5,2 × 6 × 6,5 inch
Cable	transparent 2,5 m / 98,4 inch
Weight	+ - 0,8 kg / 1,76 lbs
Glass	mouth-blown lead-free crystal in clear
Mounting + Metal sheet top	silver (polished stainless steel) gold (polished stainless steel with nitride tittan coating)
Protection	IP 20
Nominal voltage	220-240V / A.C. 50 hz (EU) 110-120 V / A.C. 60 Hz (USA)
Class	III. EU / II. USA

### LIGHT SOURCE

Type	G4, 1,2W LED, 100 lm
Base	G4 (EU) / G4 (USA)
Voltage	12V, AC
Temperature	2700 K
Color index	RA 90+
Dimming	Dimmable in constellations. Single pendant is non-dimmable except UL

### TRANSFORMER

Primary	100-240V, 50/60 Hz, 0,04A
Secondary	DC 700mA (0,5V-4V) 1x3W

### PACKAGING

Material	Cardboard
Size	185 × 165 × 165 mm 7,3 × 6,5 × 6,5 inch


Origin: traditionally produced in the Czech Republic  
Intellectual property license holder: Bomma Czech Republic (EU)  
Represented by BMRC group s.r.o.

CERTIFICATES



# pyrite

Design by  
Studio Dechem

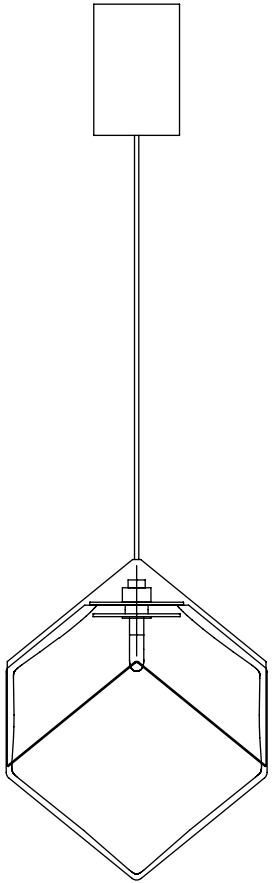

bomma

bomma.cz

TECHNICAL SHEET  
FOR PENDANT LIGHT FIXTURES


# PYRITE

## large pendant

Design by  
Studio Dechem

### Handmade glass attributes

All Bomma products are hand-made from mouth-blown lead-free crystal. Therefore any small bubbles, non-melts and irregularities in the glass are both proof and a characteristic feature of this traditional craft.

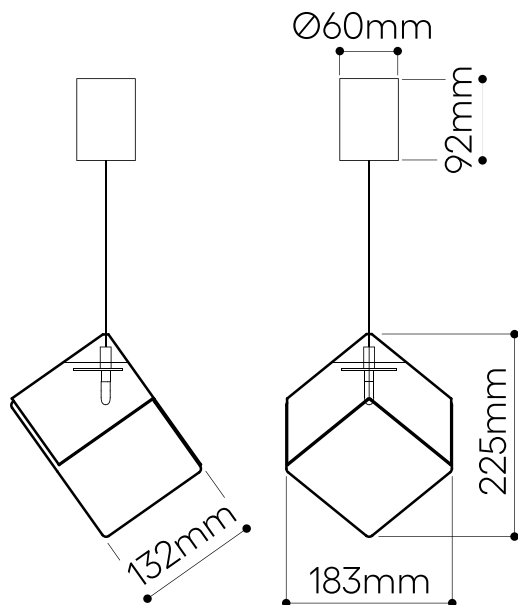

### LIGHTING DESCRIPTION

Size	183 × 209 × 225 mm 7,2 × 8,2 × 8,9 inch
Cable	transparent 2,5 m / 98,4 inch
Weight	+/- 1,9 kg / 4,2 lbs
Glass	mouth-blown lead-free crystal in clear
Mounting + Metal sheet top	silver (polished stainless steel) gold (polished stainless steel with nitride tittan coating)
Protection	IP 20
Nominal voltage	220-240V / A.C. 50 hz (EU) 110-120 V / A.C. 60 Hz (USA)
Class	III. EU / II. USA

### LIGHT SOURCE

Type	G4, 1,2W LED, 100 lm
Base	G4 (EU) / G4 (USA)
Voltage	12V, AC
Temperature	2700 K
Color index	RA 90+
Dimming	Dimmable in constellations. Single pendant is non-dimmable except UL

### TRANSFORMER

Primary	100-240V, 50/60 Hz, 0,04A
Secondary	DC 700mA (0,5V-4V) 1x3W

### PACKAGING

Material	Cardboard
Size	230 × 220 × 220 mm 9 × 8,6 × 8,6 inch

Origin: traditionally produced in the Czech Republic  
Intellectual property license holder: Bomma Czech Republic (EU)  
Represented by BMRC group s.r.o.

CERTIFICATES

