

# Ascend

This flat panel step light, designed for both indoor and outdoor use, combines modern elegance with robust functionality, casting a subtle and inviting glow to enhance safety and aesthetics in any space.


NEW

2200k 2700k 3000k 3500k 4000k

COLOR TEMPERATURE

WET

ETL Intertek

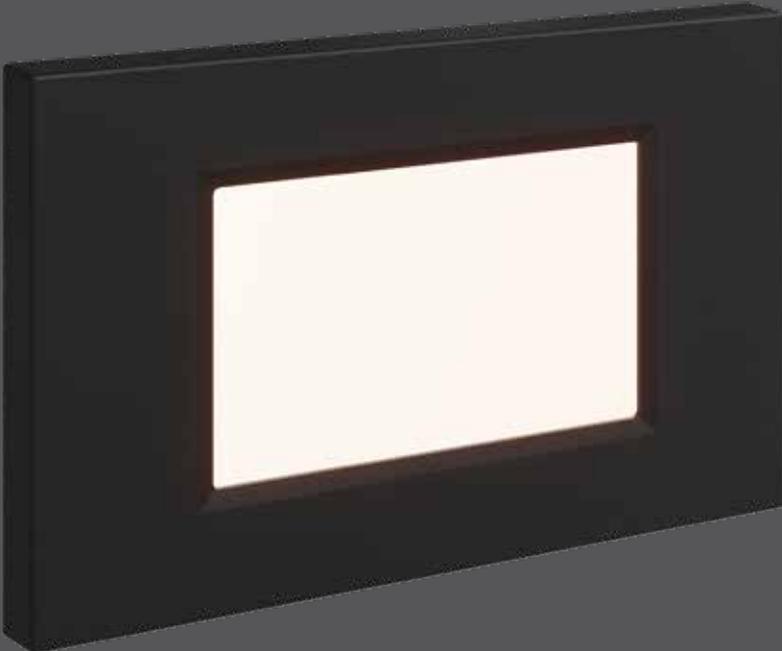

Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
<b>LSTP07-CC</b>	4-3/4"	4 W	150 lm	90	2200, 2700, 3000, 3500, 4000 K	120 V

### Specifications

Die-cast aluminum housing  
 Over 50,000 hours of service life  
 Switch-selectable CCT: 2200 K/2700 K/  
 3000 K/3500 K/4000 K  
 Integrated dimmable driver  
 Suitable for wet locations  
 Install in standard electrical junction box  
 Refer to website for dimmer compatibility  
 Ideal operating temperature:  
 -20° to 40° C  
 5-year warranty

### Finish

- **BK** Black
- **WH** White

### Note

Other color temperatures, finishes, and voltage options are available but may require minimum order quantities (MOQs) and longer lead times. Please contact your DALI representative for more information.

### LSTP07-CC

