

ECO2NWL300-120D

3-1/2" ECO²LED Series

IC and Air Tight New Construction Housing

SPECIFICATIONS

HOUSING DETAILS Up to 0.051" (1.3 mm) thick galvanized steel housing. Approved for installation in insulated ceilings and in direct contact with insulating material (except polyurethane).
Junction box can support up to 10 x 14 gauge wires or 8 x 12 gauge wires.
Below-ceiling accessible.

MOUNTING **Cutout diameter: Ø 3-5/8" (92 mm)**
Can fit ceilings up to 1-1/2" (38 mm) thick.
Requires a 6" clearance beyond the ceiling level.
Contrast hooks for ease of installation and a perfect fit to ceiling.
Mounting bars extend from 10" (254 mm) to 24-1/2" (622 mm) to fit in most ceilings.
No light leakage.

POWER 9W LED driver (9W power consumption)

VOLTAGE 120 Volts

DIMMING Compatible with Electronic Low Voltage (ELV) dimmers.
Due to constant evolution of associated dimmers we must test them regularly.
We invite you to consult frequently our Web site to find our dimmer compatibility list: www.contrastlighting.com

COMPATIBLE TRIMS ECO2L3A
ECO2L3B
ECO2L3C
ECO2L3D

CERTIFICATION • cULus **E343977** for damp locations; wet with shower trim only
• Title 24
• ASTM E283



WARRANTY 5 years on LED driver

Project _____


Notes _____

Fixture Type _____

Date _____

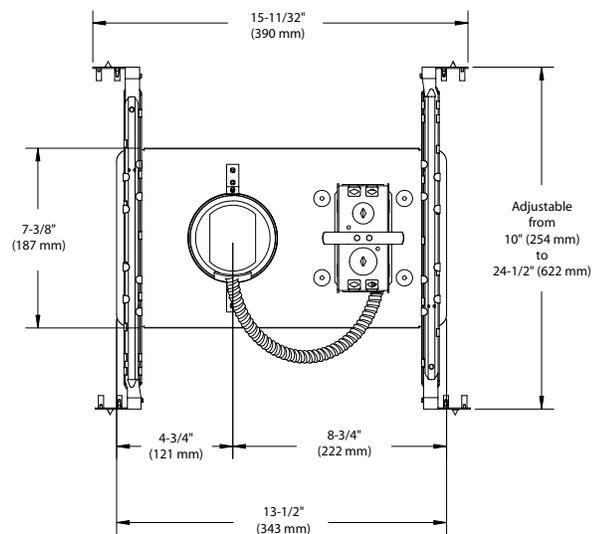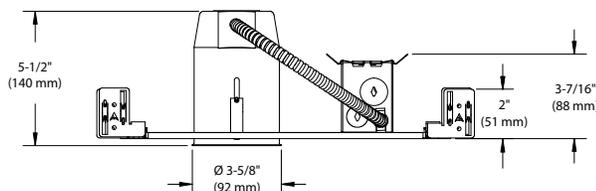

CODIFICATION EXAMPLE

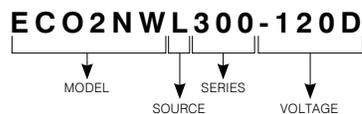

ORDERING CODE

MODEL	SOURCE	SERIES	VOLTAGE
ECO2NW	L	300	-120D
ECO2NW New Construction	L LED	300 300 Series	-120D 120V Compatible Dimming

