

Concerto LED - LD2D

4" Series

Low Profile Round Adjustable Regressed Trim

DESCRIPTION

This series of adjustable round or square trims, offers a reflector and recessed lamp for a more discreet ambient lighting and visual comfort.

SPECIFICATIONS

COLOR TEMPERATURE 2,700K, 3,000K, 3,500K and 4,000K

CRI 80 +
90 + (only at 3,000K)

POWER SUPPLY Several driver models available giving you 3 dimming options: ELV, 0-10V or Pulse Width Modulation (PWM).

LED MODULE Bridgelux Vero 18, delivers a lumen maintenance greater than 70% after 50,000 hours of operation (L₇₀). Provides a high quality true color and a clean white light without hot spots. Binning within 3 steps on MacAdam ellipse. Surpass ANSI binning requirements.

DELIVERED LUMENS
(Determined by the choice of housing)
Performance 1: 1,070 lumens, 69 lm/W
Performance 2: 1,485 lumens, 65 lm/W

TRIM Powder coated paint or plated die-formed steel. Different finishes available. Painted finishes available with Marine Grade option.

OPTIC SYSTEM Interchangeable optional optical reflectors and lenses available to personalize your lighting. Protection lens covered with a high-performance film 98% effective. Lens of 1/8" (3 mm) thick and 1.9" (49 mm) Ø.

Choice of available lenses:

Clear (C), Frosted (F), Honeycombs (H), Linear (L), Prismatic (P) and Solite (S)

Optical reflectors available:

M: Narrow Flood → 27° W: Flood → 48°

AJUSTABILITY Swivel: 360°
40° tilt and with locking position.
Choose aiming angle then tighten screws to lock into position.

HEAT SINK High quality aluminum injected heat sink ensuring maximum heat dissipation.

REFLECTOR	Anodized	Painted	
	Natural Anodized (AN)	White (01)* Black (02) Architectural Bronze (05)*	Antique Copper (06)* Matte White (11)* Metallic Grey (15)*
	Specular		
	Specular (SP)		

*These reflector colors are available only with the same trim color.

CEILING CUTOUT Ø 4-1/4" (108 mm)

COMPATIBLE HOUSINGS	Remodel Housing	New Construction Housing	Insulated Housing
(Performance 2 trims work with either performance 1 and 2 housings.)	Performance 1 (1,500 lumens)	RELD200LE1 RELD200LD1 RELD200LA1	NWLD200LE1 NWLD200LD1 NWLD200LA1
	Performance 2 (2,000 lumens)	RELD200LE2 RELD200LD2 RELD200LA2	NWLD200LE2 NWLD200LD2 NWLD200LA2
			Not Available

For dimming, please refer to the selected housing specification sheet.

CERTIFICATION • cULus E343977 for damp locations

WARRANTY 1 year for standard finishes, 2 years on "Marine Grade" finish and 5 years on LED module.

Project _____



Notes _____

Fixture Type _____

Date _____



LD2DC-12BRSP (illustrated)

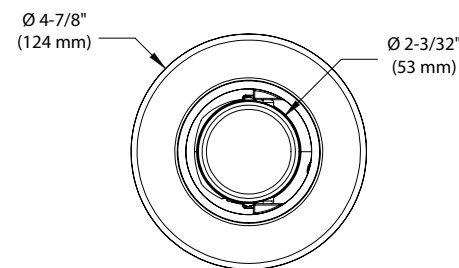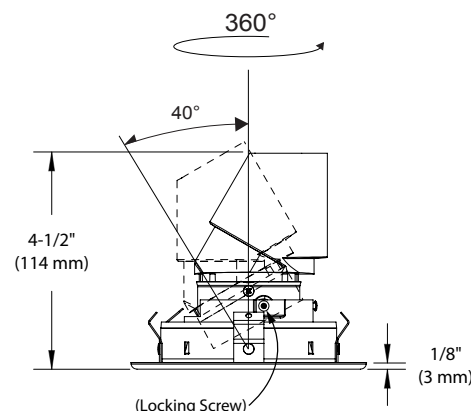


Concerto LED - LD2D

4" Series

PHOTOMETRIC DATA

3,000K, 80 + of CRI, Narrow Flood with performance 1 housing

CANDLEPOWER DISTRIBUTION



LIGHT CONE

Distance	FC	DIA
06'	59.9	2.9'
08'	33.7	3.9'
10'	21.6	4.9'
12'	15.0	5.9'
14'	11.0	6.8'
16'	8.4	7.8'

Beam: 27°
Beam Edge defined as 50% of Maximum Nadir Candle-power.

LUMINAIRE

Performance 1 LED	3,000K	Narrow Flood
CBCP / Lumens	2,157	/ 928
Watts	120V	277V
	15.9W	16.4W
Operating AMPS	0.13A	0.058A
Lumen Maintenance	L70 @ 50,000 Hrs	
CRI	80 +	
Lumens/Watt	58	
Spacing Criteria	0.4	
Certificate LM79-08	475807	

COEFFICIENT OF UTILIZATION - %

Ceiling Reflect %	80			50			30		
Wall Reflect %	50	30	50	30	50	30	50	30	
RCR	0	119	119	111	111	106	106	106	
	2	107	104	102	100	99	97	97	
	4	97	93	94	90	92	89	89	
	6	88	84	86	83	85	82	82	
	8	80	76	79	75	78	74	74	
	10	73	69	72	68	71	68	68	

Zonal Cavity Method
Effective Floor Cavity Reflectance 20%

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LUMINAIRE
0-30	691	74.43%
0-40	898	96.78%
0-60	927	99.88%
60-90	1	0.12%
0-90	928	100%

MULTIPLE UNIT DATA - (RCR 2)

SPACING ON CENTER	INITIAL FOOTCANDLES	WATTS/SQ. FT.
5'	45	0.7
6'	25	0.4
7'	18	0.28
8'	18	0.28
9'	11	0.18


Local 38' x 38' x 10'. Workplan located 2 1/2' (30°).
Reflection factor of 80%/50%/30%.

CANDELAS DISTRIBUTION

DEGREES/VERTICAL	CANDELAS	DEGREES/VERTICAL	CANDELAS
0	2,157	45	12
5	1,879	55	1
10	1,356	65	1
15	987	75	0
20	700	85	0
25	547	90	0
35	354		

3,000K, 80 + of CRI, Flood with performance 1 housing

CANDLEPOWER DISTRIBUTION



LIGHT CONE

Distance	FC	DIA
06'	42.1	5.3
08'	23.7	7.1
10'	15.2	8.9
12'	10.5	10.7
14'	7.7	12.5
16'	5.9	14.3

Beam: 48°
Beam Edge defined as 50% of Maximum Nadir Candle-power.

LUMINAIRE

Performance 1 LED	3,000K	Flood
CBCP / Lumens	1,515	/ 1,062
Watts	120V	277V
	15.5W	16W
Operating AMPS	0.13A	0.057A
Lumen Maintenance	L70 @ 50,000 Hrs	
CRI	80 +	
Lumens/Watt	69	
Spacing Criteria	0.8	
Certificate LM79-08	475809	

COEFFICIENT OF UTILIZATION - %

Ceiling Reflect %	80			50			30		
Wall Reflect %	50	30	50	30	50	30	50	30	
RCR	0	119	119	111	111	106	106	106	
	2	107	104	102	99	99	97	97	
	4	97	93	94	90	92	89	89	
	6	88	84	86	82	85	82	82	
	8	80	76	79	75	78	74	74	
	10	73	69	72	68	71	68	68	

Zonal Cavity Method
Effective Floor Cavity Reflectance 20%

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LUMINAIRE
0-30	811	76.30%
0-40	1,025	96.50%
0-60	1,059	99.60%
60-90	4	0.40%
0-90	1,062	100%

MULTIPLE UNIT DATA - (RCR 2)

SPACING ON CENTER	INITIAL FOOTCANDLES	WATTS/SQ. FT.
5'	52	0.69
6'	29	0.39
7'	20	0.27
8'	20	0.27
9'	13	0.17

Local 38' x 38' x 10'. Workplan located 2 1/2' (30°).
Reflection factor of 80%/50%/30%.

CANDELAS DISTRIBUTION

DEGREES/VERTICAL	CANDELAS	DEGREES/VERTICAL	CANDELAS
0	1,515	45	14
5	1,485	55	2
10	1,396	65	2
15	1,250	75	1
20	1,015	85	1
25	700	90	0
35	358		


Concerto LED - LD2D

4" Series

PHOTOMETRIC DATA

3,000K, 80 + of CRI, Narrow Flood with performance 2 housing

CANDLEPOWER DISTRIBUTION

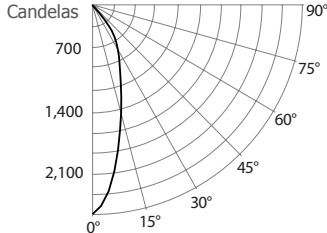

LIGHT CONE

Distance	FC	DIA
06'	68.6	3.5'
08'	38.6	4.6'
10'	24.7	5.8'
12'	17.2	6.9'
14'	12.6	8.1'
16'	9.7	9.2'

Beam: 32°
Beam Edge defined as 50% of Maximum Nadir Candle-power.

LUMINAIRE

Performance 2 LED	3,000K	Narrow Flood
CBCP / Lumens	2,471	/ 1,247
Watts	120V	277V
	23.1W	23.6W
Operating AMPS	0.19A	0.085A
Lumen Maintenance	L70 @ 50,000 Hrs	
CRI	80 +	
Lumens/Watt	54	
Spacing Criteria	0.5	
Certificate LM79-08	606972	

COEFFICIENT OF UTILIZATION - %

Ceiling Reflect %	80			50			30		
Wall Reflect %	50	30	50	30	50	30	50	30	50
RCR	0	119	119	111	111	106	106	106	106
	2	107	103	101	99	99	97	97	97
	4	96	92	93	90	91	89	89	89
	6	88	83	86	82	84	81	81	81
	8	79	75	78	74	77	73	73	73
	10	72	67	71	67	70	66	66	66

Zonal Cavity Method
Effective Floor Cavity Reflectance 20%

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LUMINAIRE
0-30	914	73.29%
0-40	1,190	95.42%
0-60	1,246	99.92%
60-90	1	0.08%
0-90	1,247	100%

MULTIPLE UNIT DATA - (RCR 2)

SPACING ON CENTER	INITIAL FOOTCANDLES	WATTS/SQ. FT.
5'	61	1.02
6'	34	0.58
7'	24	0.4
8'	24	0.4
9'	15	0.26


Local 38' x 38' x 10'. Workplan located 2 1/2' (30°).
Reflection factor of 80%/50%/30%.

CANDELAS DISTRIBUTION

DEGREES/VERTICAL	CANDELAS	DEGREES/VERTICAL	CANDELAS
0	2,471	45	39
5	2,211	55	1
10	1,747	65	2
15	1,313	75	0
20	986	85	0
25	763	90	0
35	459		

3,000K, 80 + of CRI, Flood with performance 2 housing

CANDLEPOWER DISTRIBUTION



LIGHT CONE

Distance	FC	DIA
06'	64.6	4.9'
08'	36.3	6.6'
10'	23.2	8.2'
12'	16.1	9.9'
14'	11.9	11.5'
16'	9.1	13.2'

Beam: 45°
Beam Edge defined as 50% of Maximum Nadir Candle-power.

LUMINAIRE

Performance 2 LED	3,000K	Flood
CBCP / Lumens	2,324	/ 1,484
Watts	120V	277V
	23W	23.5W
Operating AMPS	0.19A	0.084A
Lumen Maintenance	L70 @ 50,000 Hrs	
CRI	80 +	
Lumens/Watt	64	
Spacing Criteria	0.7	
Certificate LM79-08	606974	

COEFFICIENT OF UTILIZATION - %

Ceiling Reflect %	80			50			30		
Wall Reflect %	50	30	50	30	50	30	50	30	50
RCR	0	119	119	111	111	106	106	106	106
	2	107	104	102	100	99	97	97	97
	4	97	93	94	91	92	89	89	89
	6	89	84	87	83	85	82	82	82
	8	81	76	79	75	78	75	75	75
	10	74	69	72	68	72	68	68	68

Zonal Cavity Method
Effective Floor Cavity Reflectance 20%

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%LUMINAIRE
0-30	1,139	76.76%
0-40	1,439	96.94%
0-60	1,484	99.95%
60-90	1	0.05%
0-90	1,484	100%

MULTIPLE UNIT DATA - (RCR 2)

SPACING ON CENTER	INITIAL FOOTCANDLES	WATTS/SQ. FT.
5'	72	1.02
6'	41	0.58
7'	28	0.4
8'	28	0.4
9'	18	0.26

Local 38' x 38' x 10'. Workplan located 2 1/2' (30°).
Reflection factor of 80%/50%/30%.

CANDELAS DISTRIBUTION


DEGREES/VERTICAL	CANDELAS	DEGREES/VERTICAL	CANDELAS
0	2,324	45	20
5	2,255	55	1
10	2,058	65	1
15	1,743	75	0
20	1,347	85	0
25	980	90	0
35	499		

Concerto LED - LD2D

4" Series

LIGHTING FACTS


CONCERTO



Light Output (Lumens)	947
Watts	15.92
Lumens per Watt (Efficacy)	59

Color Accuracy
Color Rendering Index (CRI) **82**

Light Color
Correlated Color Temperature (CCT) **3130 (Bright White)**



2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: LVBP-LVYO1P (7/22/2014)
Model Number: LD2D-3080M2 ISLDXX1, RELDXX1, NWLDXX1
Type: Luminaire - Downlight

CONCERTO



Light Output (Lumens)	1252
Watts	23.12
Lumens per Watt (Efficacy)	54

Color Accuracy
Color Rendering Index (CRI) **82**

Light Color
Correlated Color Temperature (CCT) **3132 (Bright White)**



2700K 3000K 4500K 6500K


Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: LVBP-33VHYG (7/22/2014)
Model Number: LD2D-3080M2 ISLDXX2, RELDXX2, NWLDXX2
Type: Luminaire - Downlight


CONCERTO



Light Output (Lumens)	1507
Watts	23.15
Lumens per Watt (Efficacy)	65

Color Accuracy
Color Rendering Index (CRI) **81**

Light Color
Correlated Color Temperature (CCT) **3064 (Bright White)**



2700K 3000K 4500K 6500K

Warm White Bright White Daylight

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the *Label Reference Guide*.

Registration Number: LVBP-ABXYHW (7/22/2014)
Model Number: LD2D-3080W2 ISLDXX2, RELDXX2, NWLDXX2
Type: Luminaire - Downlight



Concerto LED - LD2D

4" Series

LD2D MODEL PHOTOMETRIC DATA

With performance 1 housing


	Narrow Flood		Flood	
2,700K with 80 CRI	1,102 Lms	70.8 lm/W	927 Lms	59 lm/W
3,000K with 90 CRI	806 Lms	51 lm/W	815 Lms	51.6 lm/W
3,500K with 80 CRI	1,047 Lms	66.3 lm/W	1,124 Lms	71.6 lm/W
4,000K with 80 CRI	1,122 Lms	71 lm/W	1,246 Lms	78.6 lm/W

With performance 2 housing

	Narrow Flood		Flood	
2,700K with 80 CRI	1,302 Lms	60.6 lm/W	1,550 Lms	68.9 lm/W
3,000K with 90 CRI	1,061 Lms	49.3 lm/W	1,140 Lms	53 lm/W
3,500K with 80 CRI	1,352 Lms	62.9 lm/W	1,530 Lms	71.2 lm/W
4,000K with 80 CRI	1,454 Lms	64.1 lm/W	1,701 Lms	74.9 lm/W

* All .ies and Lighting facts files are available on our Website.

CODIFICATION EXAMPLE

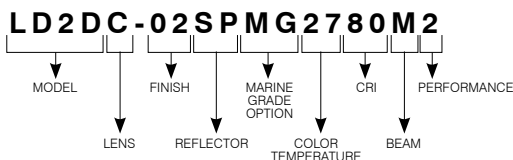

ORDERING CODE

MODEL	LENS	FINISH	REFLECTOR	MARINE GRADE	COLOR TEMPERATURE	CRI	BEAM	PERFORMANCE
LD2D								2
LD2D	C Clear	-01 White	ANODIZED	MG (optional)	27 2,700K	80 80+ CRI	M Narrow	Use with Performance 1 (1,500 lumens) or Performance 2 (2,000 lumens) Housings
	F Frosted	-02 Black	AN Natural Anodized	May be applied on	30 3,000K	90 90+ CRI	Flood (27°)	
	H Honeycombs	-03 Gold Plated 24K		finishes: -01, -02, -05, -06, -11 and -15	35 3,500K	(only with 3,000K)	W Flood (48°)	
	L Linear	-04 Chrome	SPECULAR		40 4,000K			
	P Prismatic	-04BR Brushed Chrome	SP Specular					
	S Solite	-05 Architectural Bronze	PAINTED					
		-06 Antique Copper	01 White*					
		-11 Matte White	02 Black					
		-12BR Brushed Nickel	05 Architectural Bronze*					
		-13 Satin Nickel	06 Antique Copper*					
		-15 Metallic Grey	11 Matte White*					
		-17 Antique Nickel	15 Metallic Grey*					

*These reflector colors are available only with the same trim color.

For future on site modification of the light distribution.

Ordering codes: replacement lenses and reflectors.

Lenses (to modify light diffusion)

Linear: **103092** Honeycombs: **103089**
 Solite: **103098** Frosted: **316228**
 Prismatic: **103095** Clear: **103584**

Reflectors (to modify the beam angle)

For a Narrow Flood: **316082**
 For a Flood: **316211**

MARINE GRADE - Unless otherwise indicated, trims are for interior, cold and exterior locations where fixtures are not subject to direct rain or snow exposure as in soffits. **MARINE GRADE** treatment is recommended for exterior, shower and high salinity environment.

