



# NOVA C350 0\_1-10V 100-240V

ver. 20200404\_Rev\_0

year: 2015  
code: 1690224U20000  
type: ceiling lamp  
application: indoor

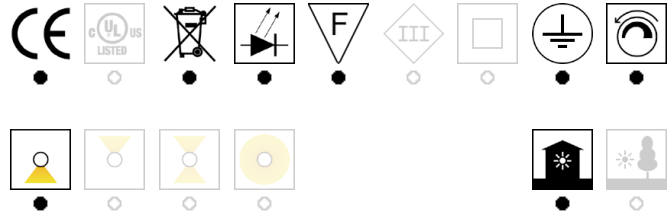

**Technical drawing**  
Size ref. image mm - inch

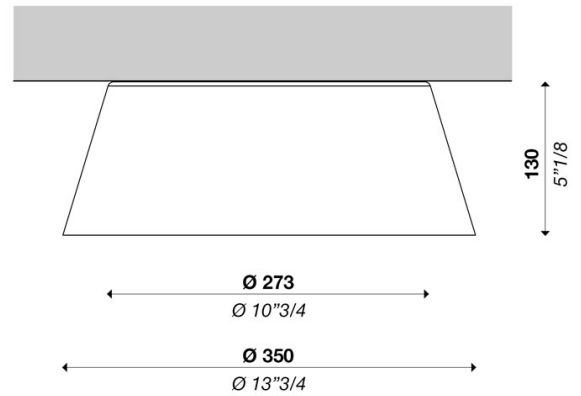

**Technical data**

Light source	LED
Circuit structure	LED module vers.4
Light emission direction	direct
Power	21 W
Source lumens	3480 lm
Source efficacy	166 lm
Consumption	24 W
Delivered lumens	2210 lm
Luminaire efficacy	92 lm/W
Secondary	700mA
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○
<b>Optional</b>	
Emergency mode	○
Motion sensor	○
Directional	○

**Packing**

Net weight	
Packaging 1	L430 x W430 x H230 mm / 3.50 kg
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

**Structure**

Material	aluminium
Finish	white / variants page 2

**Diffuser**

Material	pmma
Finish	opal / variants page 2

**Electronics / Driver**

Included	Yes
Quantity	1
Voltage	100-240V 50/60 Hz

**Dimmable**



**Hanging cables**

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	-

**Warranty**

Duration	2 years
----------	---------


# NOVA C350 0\_1-10V 100-240V

ver. 20200404\_Rev\_0


year: **2015**  
code: **1690224U20000**  
type: **ceiling lamp**  
application: **indoor**

## Available variants


### Colour temperature

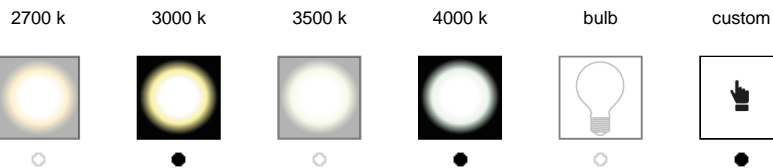


### Colour rendering index

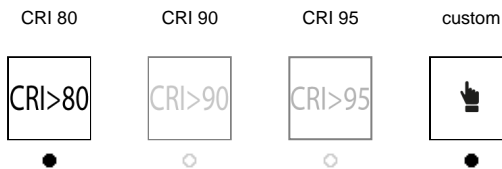

### Structure finish

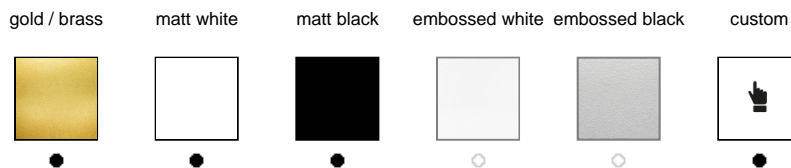


### Diffuser / Optical

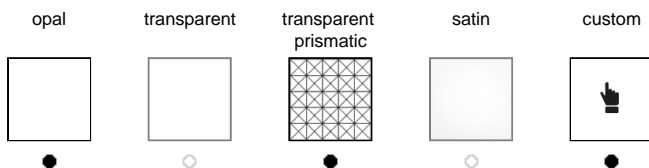


# NOVA C600 0\_1-10V 100-277V

ver. 20200404\_Rev\_0

year: 2015  
code: 1690225U20000  
type: ceiling lamp  
application: indoor

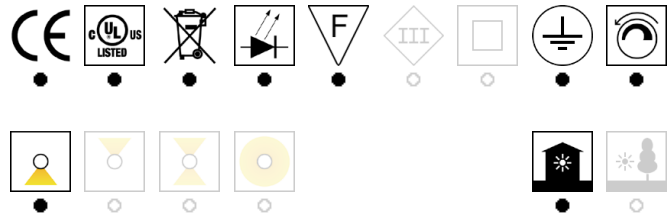

**Technical drawing**  
Size ref. image mm - inch

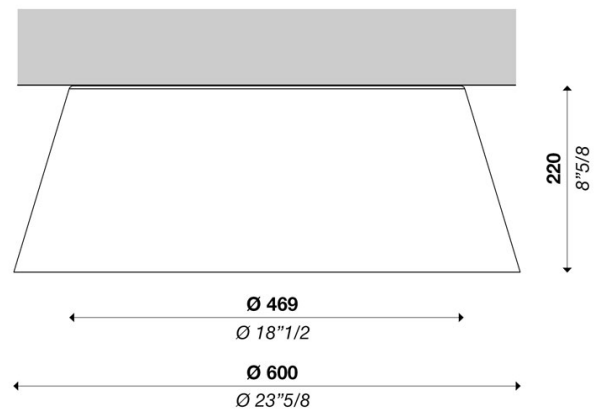

### Technical data

Light source	LED
Circuit structure	LED module vers.4
Light emission direction	direct
Power	41 W
Source lumens	7000 lm
Source efficacy	171 lm
Consumption	44 W
Delivered lumens	4264 lm
Luminaire efficacy	97 lm/W
Secondary	1200mA
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	●
<b>Optional</b>	
Emergency mode	○
Motion sensor	○
Directional	○

### Packing

Net weight	
Packaging 1	L730 x W730 x H380 mm / 7.0 kg
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

### Structure

Material	aluminium
Finish	white / variants page 2

### Diffuser

Material	pmma
Finish	opal / variants page 2

### Electronics / Driver

Included	Yes
Quantity	1
Voltage	100-277V 50/60 Hz

### Dimmable



### Hanging cables

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	-

### Warranty

Duration	2 years
----------	---------




# NOVA C600 0\_1-10V 100-277V

ver. 20200404\_Rev\_0





year: **2015**  
code: **1690225U20000**  
type: **ceiling lamp**  
application: **indoor**

## Available variants







### Colour temperature

2700 k	3000 k	3500 k	4000 k	bulb	custom
					
<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>






### Colour rendering index

CRI 80	CRI 90	CRI 95	custom
			
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

### Structure finish

gold / brass	matt white	matt black	embossed white	embossed black	custom
					
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>


### Diffuser / Optical

opal	transparent	transparent prismatic	satin	custom
				
<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>


# NOVA C940 POWER 0\_1-10V 100-277V

ver. 20200404\_Rev\_0

year: 2015  
code: 1690227U20000  
type: ceiling lamp  
application: indoor

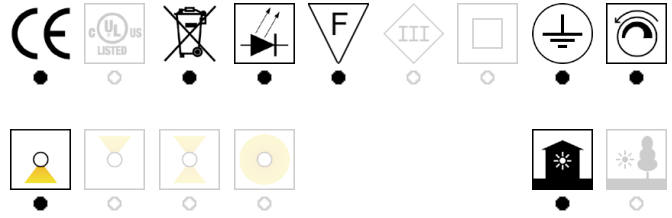

**Technical drawing**  
Size ref. image mm - inch

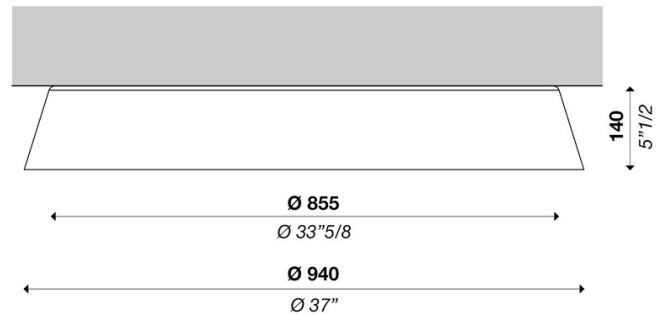

### Technical data

Light source	LED
Circuit structure	LED module vers.3
Light emission direction	direct
Power	128 W
Source lumens	22764 lm
Source efficacy	178 lm
Consumption	165 W
Delivered lumens	17742 lm
Luminaire efficacy	108 lm/W
Secondary	1050mA
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○
<b>Optional</b>	
Emergency mode	○
Motion sensor	○
Directional	○

### Packing

Net weight	
Packaging 1	L1150 x W1150 x H280 mm
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

### Structure

Material	aluminium
Finish	white / variants page 2

### Diffuser

Material	pmma
Finish	opal / variants page 2

### Electronics / Driver

Included	Yes
Quantity	4
Voltage	100-277V 50/60 Hz

### Dimmable



### Hanging cables

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	-

### Warranty

Duration	2 years
----------	---------


# NOVA C940 POWER 0\_1-10V 100-277V

ver. 20200404\_Rev\_0


year: **2015**  
code: **1690227U20000**  
type: **ceiling lamp**  
application: **indoor**

## Available variants


### Colour temperature

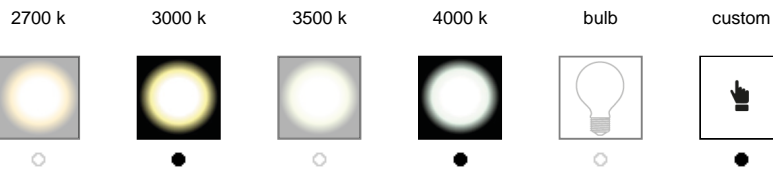

### Colour rendering index

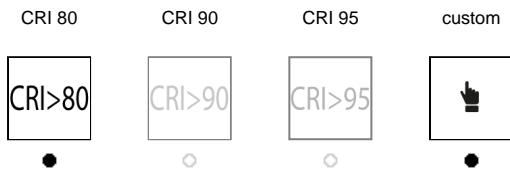

### Structure finish

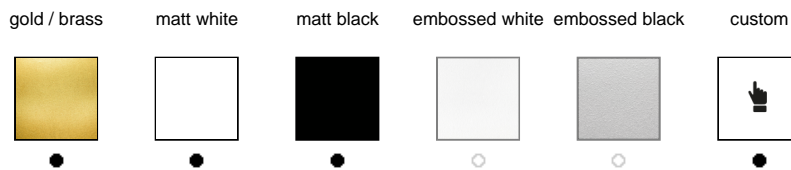

### Diffuser / Optical

