



PIN C160 0-10V 110V

ver. 20200404_Rev_0

year: **2014**
code: **1710216A20000**
type: **ceiling lamp**
application: **indoor**

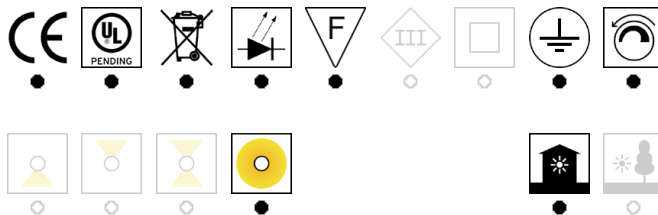

Technical drawing
Size ref. image mm - inch

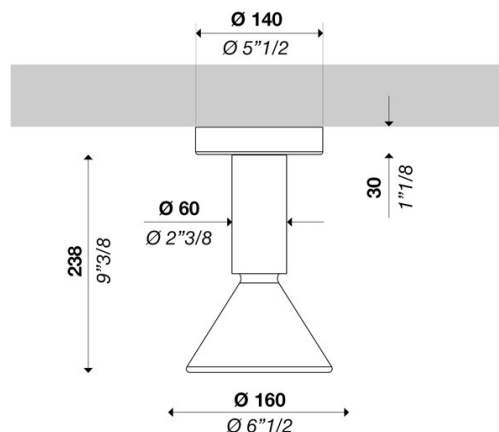

Technical data	
Light source	LED
Circuit structure	LED COB G7
Light emission direction	diffused
Power	9 W
Source lumens	1406 lm
Source efficacy	155 lm/W
Consumption	12 W
Delivered lumens	916 lm
Luminaire efficacy	76 lm/W
Secondary	350mA
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○
Optional	
Emergency mode	○
Motion sensor	○
Directional	○

Packing	
Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

Structure	
Material	aluminium
Finish	white / variants page 2
Diffuser	
Material	glass
Finish	white
Electronics / Driver	
Included	Yes
Quantity	1
Voltage	100-240V 50/60 Hz
Dimmable	
ON/OFF	○
PUSH	○
0-10V	●
1-10V	○
CUT PHASE	○
Bluetooth	○
DALI	○
Hanging cables	
Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	-
Warranty	
Duration	2 years

PIN C160 0-10V 110V

ver. 20200404_Rev_0

year: **2014**

code: **1710216A20000**

type: **ceiling lamp**

application: **indoor**

Available variants

Colour temperature

2700 k



3000 k



3500 k



4000 k



custom



Colour rendering index

CRI 80



CRI 90



CRI 95



custom



Structure finish

gold / brass



matt white



matt black



embossed white



embossed black



Diffuser / Optical

opal



transparent



satín




custom




PIN C370 ON-OFF 110V

ver. 20200404_Rev_0

year: 2014
code: 1710237A00600
type: ceiling lamp
application: indoor

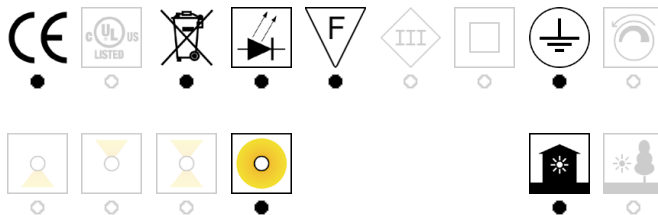

Technical drawing
Size ref. image mm - inch

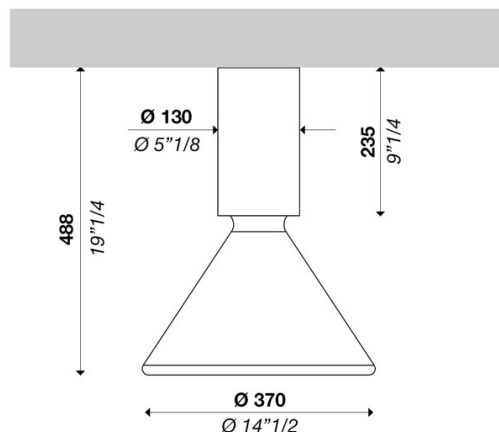

Technical data	
Light source	LED bulb
Circuit structure	LED bulb
Light emission direction	diffused
Power	1x MAX 20W E26
Source lumens	-
Source efficacy	-
Consumption	-
Delivered lumens	-
Luminaire efficacy	-
Secondary	-
Colour temperature	-
Colour rendering index	-
Standard Deviation of Colour Matching	-
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○
Optional	
Emergency mode	○
Motion sensor	○
Directional	○

Packing	
Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

Structure	
Material	aluminium
Finish	white / variants page 2

Diffuser	
Material	glass
Finish	white

Electronics / Driver	
Included	No
Quantity	
Voltage	100-120V 60 Hz

Dimmable	
ON/OFF	●
PUSH	○
0-10V	○
1-10V	○
CUT PHASE	○
Bluetooth	○
DALI	○

Hanging cables	
Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	-

Warranty	
Duration	2 years

PIN C370 ON-OFF 110V

ver. 20200404_Rev_0

year: **2014**
code: **1710237A00600**
type: **ceiling lamp**
application: **indoor**

Available variants

Colour temperature

2700 k 3000 k 3500 k 4000 k custom



Colour rendering index

CRI 80 CRI 90 CRI 95 custom



Structure finish

gold / brass matt white matt black embossed white embossed black



Diffuser / Optical

opal transparent satin custom

