


# RITMO C1800 0-10V 100-277V


ver. 20200911\_Rev\_0

year: 2020  
code: 2570201S20100  
type: ceiling lamp  
application: indoor

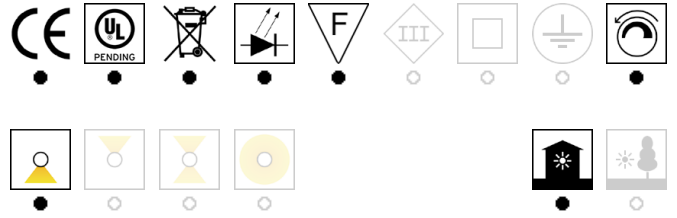

## Technical drawing

Size ref. image mm - inch

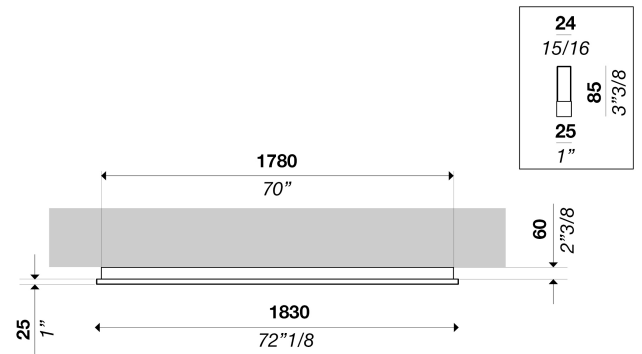

### Technical data

Light source	LED
Circuit structure	LED strip
Light emission direction	direct
Power	43 W
Source lumens	6440 lm
Source efficacy	150 lm/W
Consumption	48 W
Delivered lumens	4400 lm
Luminaire efficacy	92 lm/W
Secondary	1000mA
Colour temperature	3000 K / variants page 2
Colour rendering index	90 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	D
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○

### Optional

Emergency mode	○
Motion sensor	○
Directional	○

### Packing

Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

### Structure

Material	aluminium
Finish	white / variants page 2

### Diffuser

Material	polycarbonate
Finish	opal / variants page 2

### Canopy

Size	○
Height	○
Ceiling mount	direct

### Electronics / Driver

Included	Yes
Quantity	1
Voltage	100-277V 50/60 Hz

### Dimmable



### Hanging cables

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	-

### Warranty

Duration	2 years
----------	---------


# RITMO C1800 0-10V 100-277V

ver. 20200911\_Rev\_0


year: **2020**  
code: **2570201S20100**  
type: **ceiling lamp**  
application: **indoor**

## Available variants


### Colour temperature

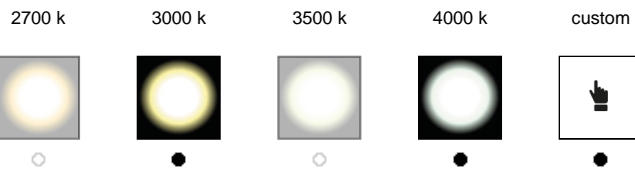


### Colour rendering index

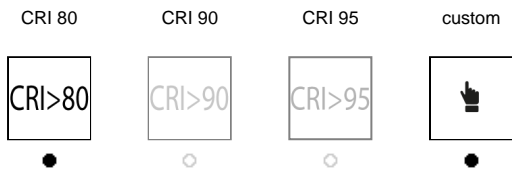

### Structure finish

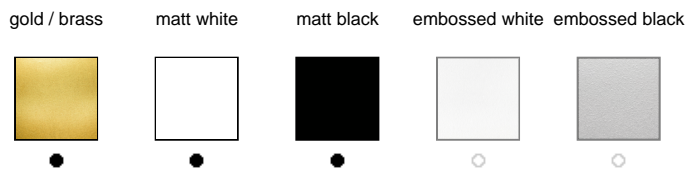


### Diffuser / Optical

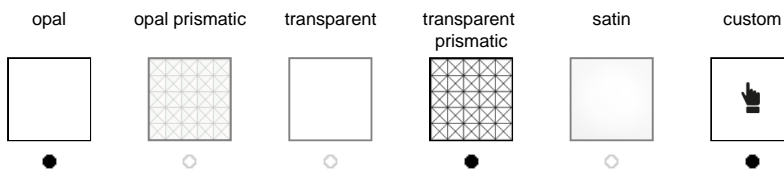


# RITMO C2500 0-10V 100-277V

ver. 20200911\_Rev\_0

year: **2020**  
code: **2570202S20100**  
type: **ceiling lamp**  
application: **indoor**

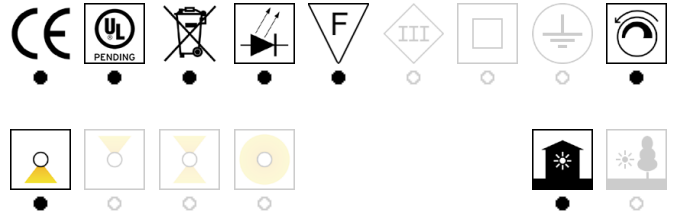

**Technical drawing**  
Size ref. image mm - inch

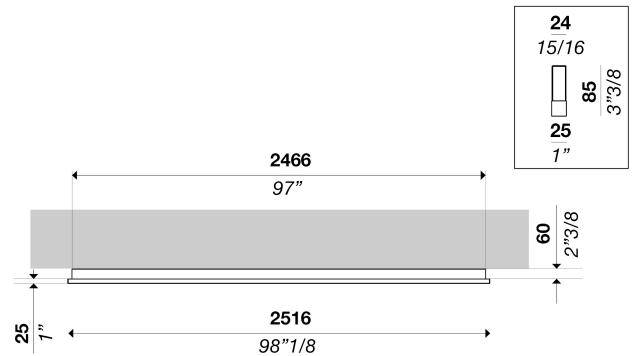

**Technical data**

Light source	LED
Circuit structure	LED strip
Light emission direction	direct
Power	62 W
Source lumens	9300 lm
Source efficacy	150 lm/W
Consumption	69 W
Delivered lumens	6348 lm
Luminaire efficacy	92 lm/W
Secondary	1400mA
Colour temperature	3000 K / variants page 2
Colour rendering index	90 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	D
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○

**Optional**

Emergency mode	○
Motion sensor	○
Directional	○

**Packing**

Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

**Structure**

Material	aluminium
Finish	white / variants page 2

**Diffuser**

Material	polycarbonate
Finish	opal / variants page 2

**Canopy**

Size	○
Height	○
Ceiling mount	direct

**Electronics / Driver**

Included	Yes
Quantity	1
Voltage	100-277V 50/60 Hz

**Dimmable**



**Hanging cables**

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	-

**Warranty**

Duration	2 years
----------	---------


# RITMO C2500 0-10V 100-277V

ver. 20200911\_Rev\_0


year: **2020**  
code: **2570202S20100**  
type: **ceiling lamp**  
application: **indoor**

## Available variants


### Colour temperature

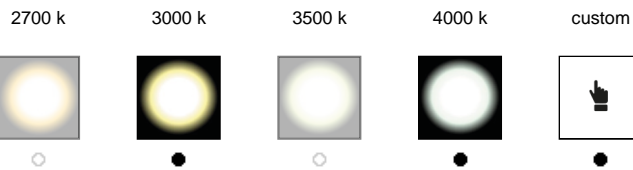

### Colour rendering index

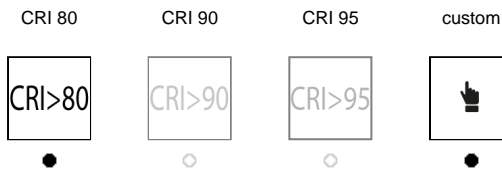

### Structure finish

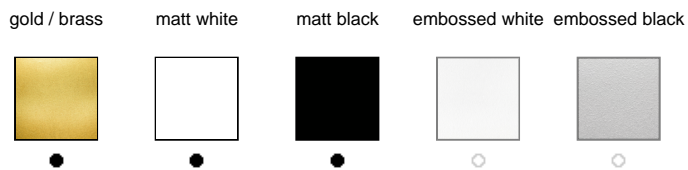

### Diffuser / Optical

