


YOU W320 0-10V 100-240V


ver. 20200404_Rev_0

year: 2015
code: 1340132U20000
type: wall lamp
application: indoor

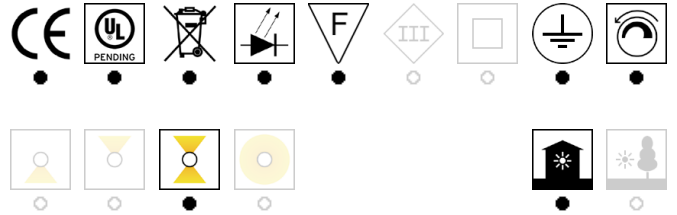

Technical drawing

Size ref. image mm - inch

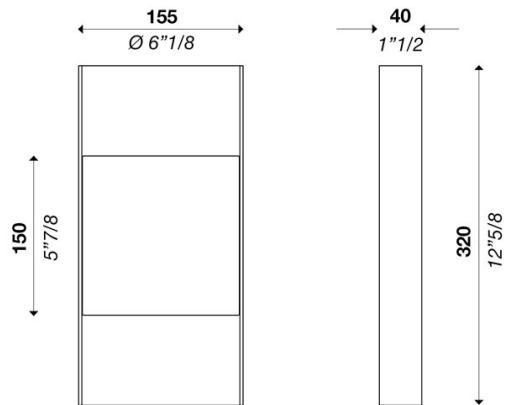

Technical data

Light source	LED
Circuit structure	LED module G5
Light emission direction	direct and indirect
Power	8 W
Source lumens	1260 lm
Source efficacy	150 lm/W
Consumption	12 W
Delivered lumens	720 lm
Luminaire efficacy	60 lm/W
Secondary	500mA
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○
Optional	
Emergency mode	○
Motion sensor	○
Directional	○

Packing

Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

Structure

Material	aluminium
Finish	white outside / variants page 2

Diffuser

Material	
Finish	


Lampshade

Material	aluminium
Finish	white inside / variants page 2

Electronics / Driver

Included	Yes
Quantity	1
Voltage	100-240V 50/60 Hz

Dimmable



Hanging cables

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	-

Warranty

Duration	2 years
----------	---------

YOU W320 0-10V 100-240V

ver. 20200404_Rev_0

year: **2015**
code: **1340132U20000**
type: **wall lamp**
application: **indoor**

Available variants

Colour temperature

2700 k 3000 k 3500 k 4000 k custom




Colour rendering index

CRI 80 CRI 90 CRI 95 custom



Structure finish

gold / brass matt white matt black




Secondary finish

golden leaf copper leaf silver leaf



Diffuser / Optical


opal transparent transparent prismatic custom




YOU W480 0-10V 100-240V

ver. 20200404_Rev_0

year: 2015
code: 1340148U20000
type: wall lamp
application: indoor

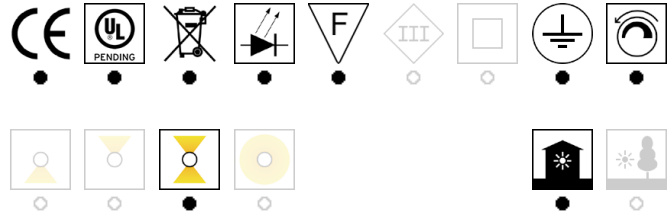

Technical drawing
Size ref. image mm - inch

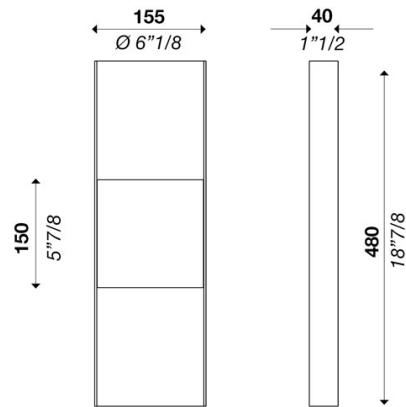

Technical data

Light source	LED
Circuit structure	LED module G5
Light emission direction	direct and indirect
Power	8 W
Source lumens	1260 lm
Source efficacy	150 lm/W
Consumption	12 W
Delivered lumens	720 lm
Luminaire efficacy	60 lm/W
Secondary	500mA
Colour temperature	3000 K / variants page 2
Colour rendering index	80 CRI / variants page 2
Standard Deviation of Colour Matching	3 SDCM
Energy class	A
Safety class	I
Degree of protection	IP 20
Direct mounting on normally flammable surfaces	●
Operating temperature	+10° / +40°
CE	●
UL	○
Optional	
Emergency mode	○
Motion sensor	○
Directional	○

Packing

Net weight	
Packaging 1	
Packaging 2	
Packaging 3	
Packaging 4	
Packaging 5	

Structure

Material	aluminium
Finish	white outside / variants page 2

Diffuser

Material	
Finish	

Lampshade

Material	aluminium
Finish	white inside / variants page 2

Electronics / Driver

Included	Yes
Quantity	1
Voltage	100-240V 50/60 Hz

Dimmable



Hanging cables

Stainless steel cables standard length (custom available)	○
Electric cable standard length (custom available)	-

Warranty

Duration	2 years
----------	---------

YOU W480 0-10V 100-240V

ver. 20200404_Rev_0

year: **2015**
code: **1340148U20000**
type: **wall lamp**
application: **indoor**

Available variants

Colour temperature

2700 k 3000 k 3500 k 4000 k custom




Colour rendering index

CRI 80 CRI 90 CRI 95 custom



Structure finish

gold / brass matt white matt black



Secondary finish

golden leaf copper leaf silver leaf



Diffuser / Optical

opal transparent transparent prismatic custom

