
HAIKU

Your space deserves a higher class of comfort with Haiku.

Renowned for its award-winning innovation, Haiku outpaces the field with iconic design, unmatched efficiency, and unrivaled functionality.

Its silent, powerful performance and range of smart home integrations will transform the way you live and work in your space.

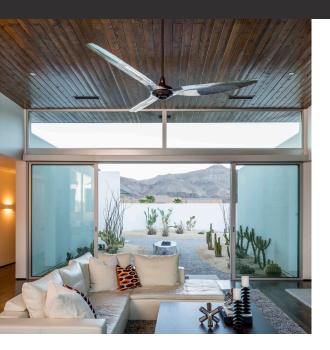

KEY FEATURES

- Hand-balanced Moso bamboo, aircraft-grade aluminum, or matrix composite airfoils
- Built-in SenseMe[™] technology for automated convenience and efficiency
- **Voice integration** with Amazon Alexa and Google Assistant devices
- Permanent-magnet motor for whisper-quiet, energy-efficient airflow
- Seven speed settings with Sleep, Whoosh, Timer, and Fan Eco modes
- Indoor and outdoor models available to fit any space

DIAMETER-

52, 60, AND 84 INCHES (132, 152, AND 213 CM)

MOUNTING-

- UNIVERSAL - STANDARD - LOW PROFILE

·CONTROL-

- PREMIUM REMOTE - MOBILE APP - VOICE INTEGRATION

- WARRANTY –

UP TO
5 YEARS
INDOOR

UP TO
3 YEARS
OUTDOOR



DISCOVER MORE ABOUT HAIKU

Learn more at **bigassfans.com/haiku** or call **877.BIG.FANS** for a free custom quote.

HAIKU INDOOR

THE CEILING FAN, REINVENTED



Airfoil Finishes







Satin Nickel





Driftwood







Hardware Finishes



Satin Nickel



Driftwood available with white hardware only.

Construction Features									
Airfoils	Motor ¹	Controls ²	Onboard Sensors ³	Mounting	Environment	Accessories			
Bamboo or aircraft-grade aluminum	High-efficiency, brushless DC/EC motor Fan Eco	Handheld remote Haiku mobile app Voice control 0–10 V (optional)	Temperature, humidity, and motion sensors enable SenseME Technology	Flat or sloped ceilings 8 ft (2.4 m) or taller	Indoor use only	Haiku Light Kit 0–10 V Module Optional extension tube lengths and a Stabilizer Kit are available for ceilings over 14 ft (4.3 m)			

Ordering Information									
Diameter		Mount	Airfoil, Motor Finish	Country	Motor	Gen	Airfoil Finish (Aluminum Only)		
			Aluminum Placks AD						
52 inch: S3127 60 inch: S3150 84 inch: B3213	52	Low Profile: S0 Standard: A2 Universal: X2	Aluminum, Black: AB Aluminum, ORB: AO Aluminum, SN: AS Aluminum, White: AW Bamboo Caramel, Black: BC Bamboo Caramel, ORB: BCO Bamboo Caramel, SN: BCS Bamboo Caramel, White: BCW Bamboo Cocoa, Black: BW Bamboo Cocoa, ORB: BWO Bamboo Cocoa, SN: BWS Bamboo Cocoa, White: BWW	North America: 04-02 Europe: 05-02 Japan: 06-02 Saudi Arabia, UAE: 08-02	52 in: C 60 in: C 84 in: D	01	Black: F258 White: F259		
	09	Low Profile: S0 Standard: A2 Universal: X2					Brushed Copper: F523 Brushed Aluminum: F531 Satin Nickel: F470 Oil-Rubbed Bronze: F471		
	84	Universal: X4					Driftwood: F772 Chrome: F779		



Remote







Remote with mount

Lead times may vary.
Warranty period and terms vary by country and application.




Activate Fan Eco to fully leverage the energy savings from your ceiling fan. Use the Haiku mobile app to enable Fan Eco.
Voice control requires an Amazon Alexa-enabled device or the Google Assistant.
SenseME Technology and the Haiku mobile app are supported by Android* and iOS*.

HAIKU INDOOR

THE CEILING FAN, REINVENTED




Low Profile Mount




Flat ceilings as low as 8 ft (2.4 m)

Standard Mount



Flat ceilings from 8.5-11 ft (2.5-3.4 m)

Universal Mount



Sloped or flat ceilings from 9–18 ft (2.7–5.5 m)

Universal Mount Downrod Lengths									
Downrod (A) ¹	Inclu	ıded	Optional						
Downrod (A)	20 in. (508 mm)	32 in. (813 mm)	7 in. (178 mm)	48 in. (1219 mm)	60 in. (1524 mm)				
Fan Height (B) ²	29 in. (737 mm) 41 in. (1041 mm)		16 in. (406 mm)	57 in. (1448 mm)	69 in. (1753 mm)				
Ceiling Height	9.5-11 ft (2.9-3.4 m)	11–13 ft (3.4–4 m)	9–11 ft (2.7–2.9 m)	13-14 ft (4-4.3 m)	>14 ft (>4.3 m)				

Aluminum Fan Specifications										
Diameter	Mount	Weight ³	Max Speed	Airflow Min/ Max	Watts Min/ Max	Operating Voltage	Ambient Operational Temperature	Sound Level ⁴		
F2:	Low Profile	16.5 lb (7.5 kg)	177 RPM	1,301 / 5,629 cfm	2.2 / 15.6 W	- 100–240 VAC, 1 Φ, 50–60 Hz	32° to 104° F (0° to 40° C)	<35 dba at max speed		
52 in. (132 cm)	Standard	16.5 lb (7.5 kg)	200 RPM	1,389 / 6,713 cfm	2.1 / 20.7 W					
(132 (111)	Universal	15.5 lb (7 kg)	200 RPM	1,389 / 6,713 cfm	2.1 / 20.7 W					
	Low Profile	18.5 lb (8.4 kg)	177 RPM	1,070 / 6,698 cfm	1.9 / 18.4 W					
60 in (152 cm)	Standard	18.5 lb (8.4 kg)	200 RPM	1,194 / 8,629 cfm	1.9 / 26.8 W					
(152 (111)	Universal	17.5 lb (8 kg)	200 RPM	1,194 / 8,629 cfm	1.9 / 26.8 W					
84 in. (213 cm)	Universal	26 lb (11.8 kg)	135 RPM	5,983 / 19,292 cfm	4.2 / 53.7 W					

Bamboo Fan Specifications										
Diameter	Mount	Weight ³	Max Speed	Airflow Min/ Max	Watts Min/ Max	Operating Voltage	Ambient Operational Temperature	Sound Level⁴		
=0.	Low Profile	14 lb (6.4 kg)	177 RPM	1,483 / 5,866 cfm	2.2 / 19.2 W	- 100–240 VAC, 1 Φ, 50–60 Hz	32° to 104° F (0° to 40° C)	<35 dba at max speed		
52 in. (132 cm)	Standard	14 lb (6.4 kg)	200 RPM	1,427 / 6,597 cfm	2.3 / 26.6 W					
(132 (111)	Universal	13 lb (5.9 kg)	200 RPM	1,427 / 6,597 cfm	2.3 / 26.6 W					
	Low Profile	16 lb (7.3 kg)	177 RPM	876 / 6,165 cfm	1.9 / 15.5 W					
60 in (152 cm)	Standard	16 lb (7.3 kg)	200 RPM	1,038 / 7,673 cfm	1.8 / 21.4 W					
	Universal	15 lb (6.8 kg)	200 RPM	1,038 / 7,673 cfm	1.8 / 21.4 W					
84 in. (213 cm)	Universal	21 lb (9.5 kg)	135 RPM	4,661 / 15,378 cfm	3.8 / 39.2 W					















Lead times may vary.

Warranty period and terms vary by country and application.



Optional downrod lengths packaged separately. The 7 in. [178 mm] downrod is not available for 84-inch (2134 mm) fans. 60 in. [1524 mm) is the longest downrod available. Fan heights do not include the Haiku Light kit. Add 0.8 in. (20 mm) for 84-inch (2134 mm) diameter fans.

The precise fan weight will way based on individual component weights and finishing.

Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.