


Bold and innovative, i6 represents the strong side of comfort. Its impressive airflow and striking design bring power into focus for your space, transforming the ordinary into the exceptional. Let automated SenseMe[™] technology and an available color-changing LED modernize your notion of fan performance, then relax as i6 silently safeguards your comfort.



KEY FEATURES

- Six premium airfoils built from aircraft-grade aluminum
- Patented brushless DC motor for silent, efficient performance
- Built-in SenseMe[™] technology for automated convenience and efficiency
- Voice integration with Amazon
 Alexa and Google Assistant devices
- Available light kit with fully dimmable, color-changing LED
- Indoor and outdoor models available to fit any space

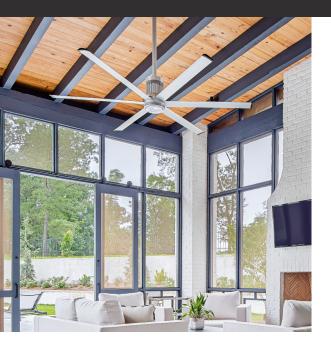





DISCOVER MORE ABOUT i6

Learn more at **bigassfans.com/i6** or call **877.BIG.FANS** for a free custom quote.

INSPIRED BY INDUSTRY, BUILT FOR COMFORT.





Pictured with 6 in. (152 mm) downrod and light kit

Pictured with flush mount and light kit

Technical	Specification	S									
Diameter (A)	Environment	CFM ¹	Efficiency (CFM/W)	Max Watts	Max Speed	Light Kit	Input Power	Weight ²	Winglet to Ceiling (B)	Light Kit Height	Sound Level ³
60 in.	Indoor	9,676	260	35.4 W	170 RPM			34 lb	17.4 in.		
(1.5 m)	Outdoor (IPX5)	9,746	257	31.6 W	170 RPIVI			(15.4 kg)	(442 mm)		
72 in.	Indoor	13,598	312	41.6 W	140 0014	1,770 lm		35.7 lb	17.1 in.	0.7 in	<35 dba at
(1.8 m)	Outdoor (IPX5)	13,860	318	42.2 W	140 RPM	72.6 lm/W	100–277 VAC, 50/60 Hz, 1 Φ	(16.2 kg)	(434 mm)	(18 mm)	max speed
84 in.	Indoor	15,576	370	40.2 W	440 0004]		37.3 lb	16.8 in.		
(2.1 m)	Outdoor (IPX5)	15,814	369	41 W	110 RPM			(16.9 kg)	(427 mm)		

Construction Fe	eatures					
Airfoils	Motor and Hub	Remote	Onboard Sensors	Integrations ⁴	Mounting⁵	Accessories
Made from aircraft-grade aluminum Tilted blade profile for optimum airflow spread	24 V DC motor and power supply housed in a three-piece cast aluminum hub with integrated airfoil retention system	"Point-anywhere" pairing Integrated speed indicators Mount fixed to wall or with magnetic holder	Temperature, humidity, and motion sensors enable SenseME Technology	Voice control with Google Assistant or Amazon Alexa Works with home automation systems	Flat or sloped ceilings 8 ft (2.4 m) or taller Maximum slope: 36°	LED Light Kit 0–10 V module Optional downrod lengths available for ceilings over 14 ft (4.3 m)

Ordering Inform	ation					
Diameter	Environment	Mount ⁶	Finish	Downrod⁵	LED Light	0–10 V
MK-I61-05: 60 in. (1.5 m) MK-I61-06: 72 in. (1.8 m) MK-I61-07: 84 in. (2.1 m)	18: Indoor 19: Outdoor	00: Flush 06: Standard	A727: Brushed Aluminum A728: Black A729: White A730: Oil-Rubbed Bronze	Blank: Flush 106: 6 in. (152 mm) 112: 12 in. (305 mm) 124: 24 in. (610 mm) 100: 36, 48, 60 in. (914, 1219, 1524 mm)	Blank: No LED Light S2: LED Light	Blank: No 0–10 V V54: 0–10 V
60 inch (1.5 m) fan measured with a 6 inch	(152 mm) downrod. When direct n	nounted, airflow and efficiency	are 7,122 cfm and 248 cfm/W (indoor) or 7,105 cfm	and 247 cfm/W (outdoor).		

¹ b0 mch (15 m) ian measured with a b inch (b2 mm) dowrrod. When direct mounted, and/ow and ethiciency are /122 km // (indoor) or /105 km and 24? ctm/W (judoor).
¹ Weight does not include mount or dowrod.
¹ Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.
¹ Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.
¹ Google Assistant is a trademark to Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com, inc. or its affiliates.
⁴ Mount to an outlet box marked acceptable for fan support of 70 to [318 kg].
⁴ Fush mount available on 60 in. (15 m) fans only, 6 and 36 in. (152 and 154 mm) downrods ordered separately.

Finish Options



Brushed Aluminum



Oil-Rubbed Bronze





LED Light Kit



Remote





Magnetic Holder

Fixed Wall Mount





USA BIGASSFANS.COM

CANADA 844-924-4277 AUSTRALIA

BIGASSFANS.COM/AU

SINGAPORE 65 6709 8500

MALAYSIA 603 5565 0888

6		-		
	~			

Lead times may vary. See full warranty for coverage information.