

PRO SERIES ROUND LED PANEL

RECESSED LED

Our LED panel lights have revolutionized recessed lighting applications across North America. The sleek and minimal construction allows for the easiest of installations.







KEY FEATURES

ENERGY STAR certified Fully dimmable Wet locations rated







MODEL

7003 3" round panel light, 6W, 3000K,

400 Lumens

7003-4K 3" round panel light, 6W, 4000K.

400 Lumens, white finish only

7004 4" round panel light, 9W, 3000K,

600 Lumens

7004-4K 4" round panel light, 9W, 4000K,

600 Lumens

7006 6" round panel light, 12W, 3000K,

850 Lumens

7006-4K 6" round panel light, 12W, 4000K,

850 Lumens, white finish only

SPECIFICATIONS

• 120V direct connection.

· Every fixture includes a junction box with an integrated driver.

Can be daisy chained.

• 80 CRI.

Superior LED performance and lifespan.

Smooth 360° wide spread.

· Minimal heat emission.

· Frosted lens.

Edge lit technology.

· Aluminum construction.

· Very low profile.

IC certification (suitable for direct contact with insulation).

· Air-tight certified as per ASTM E283-04.

• ENERGY STAR certified.

• Dimmable with most low-voltage electronic dimmers.

• Suitable for wet locations.

• FT4 certified wire.

INSTALLATION

• For recessed installation, approved with insulated ceilings.

• Ideal for general lighting applications.

• Can be installed in indoor and outdoor applications.

FINISH

ВК Black (7004 model only)


SN Satin nickel WH White


ACCESSORIES

7000-EXT108 118" (300 cm) extension cord 7000-EXT230 230" (584 cm) extension cord **LEDDOWNACC-GOOF4** Goof ring for 4" panels (7004)

7003: LEDDOWNACC-RFP3 3 1/2" (8.9 cm) Rough-in plate 7004: LEDDOWNACC-RFP4 4 1/2" (11.4 cm) Rough-in plate

7006: LEDDOWNACC-RFP6 6 5/8" (16.8 cm) Rough-in plate

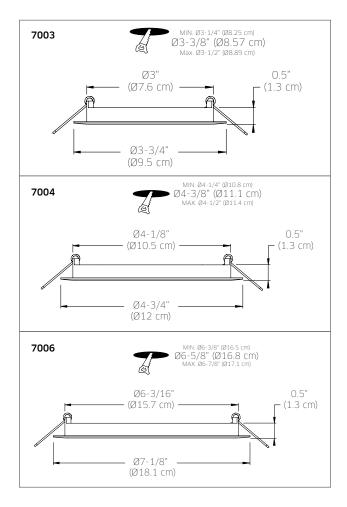



ORDERING EXAMPLE

7004-4K-WH

Would order a white 4" round panel with a LED array with 600 Lumens at 4000K.

87