



# SUPERPUCK SURFACE

PRECISION LED LIGHTING

Enjoy energy saving white light in a variety of attractive finishes. These LED pucks are well suited to accent and task lighting under cabinets and in other areas.



## KEY FEATURES

Available in 2 wattages

Extra-low profile

Ideal for highlighting display cabinets

## MODEL

<b>4002</b>	1.6W Single puck, 3000°K, 168 Lumens
<b>4002HP</b>	2.9W Single puck, 3000°K, 298 Lumens

## SPECIFICATIONS

- 12V DC LED driver required.
- Over 50,000 hours of service life.
- 12" (30 cm) input lead with quick connector.
- 24" (61 cm) interconnection harness included.
- Warm white light output.
- 90 CRI.
- Superior LED performance and lifespan.
- Smooth 360° wide spread.
- Minimal heat emission.
- Heat sink and thermal protection.
- Steel and aluminum construction.
- Frosted glass lens.
- Dimmable with most low-voltage electronic dimmers when used with DALI dimming power supply.

## INSTALLATION

- For surface installation only, in any direction.
- Ideal for accent lighting inside or under any cabinet, shelf or display.
- A variety of power supplies and installation accessories available.

## FINISH

<b>BK</b>	Black
<b>WH</b>	White
<b>SN</b>	Satin nickel

## POWER SUPPLIES — PLUG-IN


<b>ETR-LED10WPI</b>	12VDC/10W class 2 LED driver
<b>ETR-LED24WPI</b>	12VDC/24W class 2 LED driver

## POWER SUPPLIES — HARD-WIRED

<b>BT06DIMLED-IC</b>	6W dimmable LED hardwire driver
<b>BT12DIMLED-IC</b>	12W dimmable LED hardwire driver
<b>BT24DIMLED-IC</b>	24W dimmable LED hardwire driver
<b>BT36DIMLED</b>	36W dimmable LED hardwire driver
<b>BT48DIMLED</b>	48W dimmable LED hardwire driver

## ACCESSORIES

<b>4000E-24</b>	24" (61 cm) extension cord
<b>4000E-60</b>	60" (152.4 cm) extension cord for LED products
<b>4000HRNS-24</b>	24" (61 cm) interconnection harness

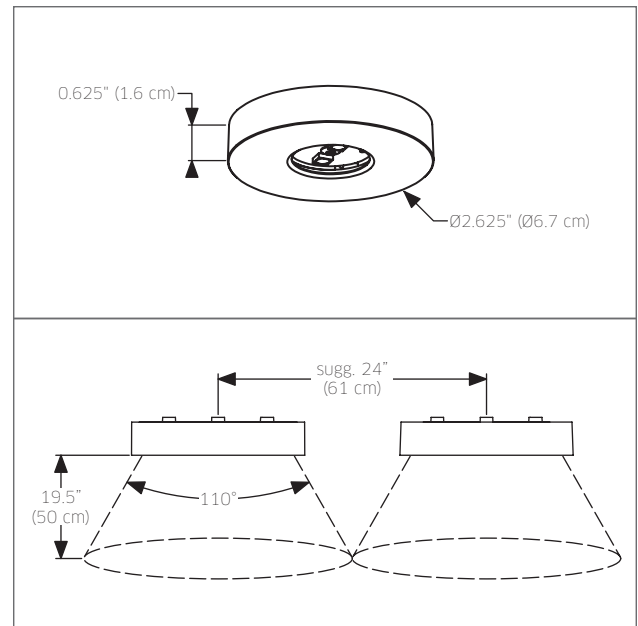

## ORDERING EXAMPLE

4002-BK  
Would order a 4002 single puck with a 1.6W LED array with 168 Lumens at 3000°K in a black finish.