
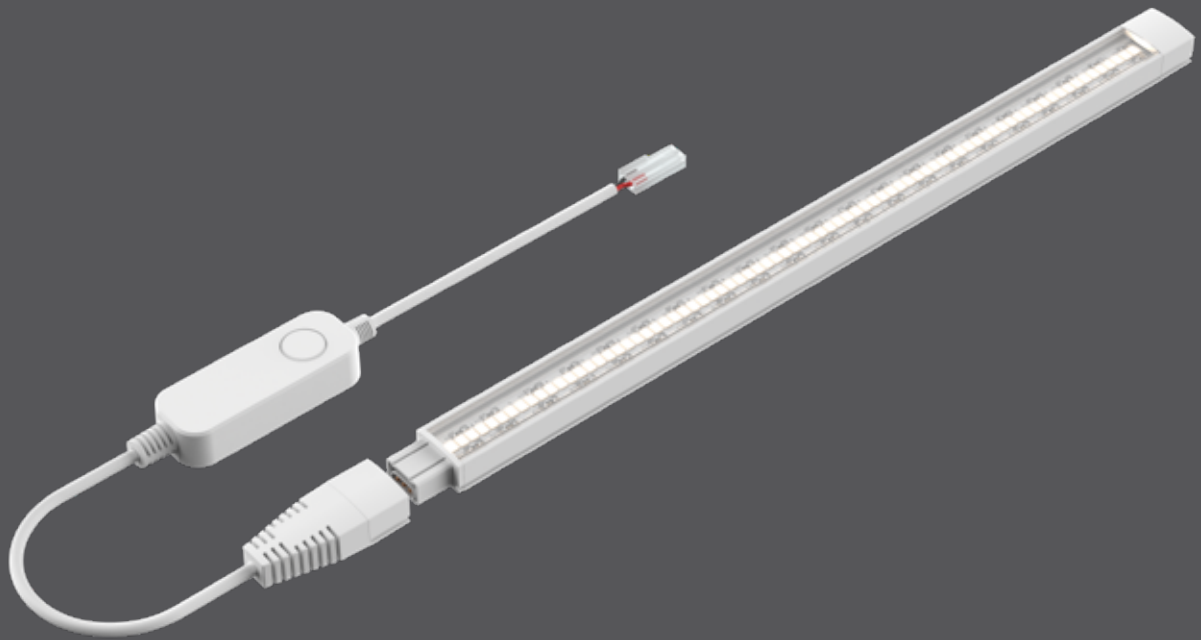


SwivLED

A 5CCT ultra-slim LED strip can be fixed or directional. Both types of brackets are included, the choice is yours.

UPGRADE



Model	Size	Watts	Delivered lumens	CRI	Color °T	Voltage
SWIVLED12-CC	12.5"	3 W	300 lm	80	2700 K/ 3000 K/ 3500 K/ 4000 K/ 5000 K	12 V

Specifications

Over 50,000 hours of service life
 10" (25 cm) power cord with CCT switch included
 Smooth linear wide spread
 Minimal heat emission
 Switch-selectable CCT: 2700 K/3000 K/3500 K/4000 K/5000 K
 Multiple fixtures can be linked together (Up to 8x SWIVLED in series)
 Refer to website for dimmer compatibility
 5-year warranty

Note

Plug-in or hard-wired power supply required for installation. Sold separately.

Other color °T and finishes available, but may require MOQ's and longer lead times. Please contact your DALI representative for more information.

Power supplies: plug-in

ETR-LED10WPI
 12V DC/10W class 2 LED driver
ETR-LED24WPI
 12V DC/24W class 2 LED driver

Power supplies: hard-wired

BT06DIM-IC
 6W dimmable LED hardwire driver
BT12DIM-IC
 12W dimmable LED hardwire driver
BT24DIM-IC
 24W dimmable LED hardwire driver
BT36DIM
 36W dimmable LED hardwire driver
BT48DIM
 48W dimmable LED hardwire driver

Accessories

SWIVLEDC-EXT10
 10" extension cord
SWIVLEDC-EXT36
 36" extension cord
SWIVLEDC-EXT60
 60" interconnection harness

Finish

WH White

SWIVLED12-CC

*Add 12.5" for each additional unit

