



DALS LIGHTING

Canada
80, de la Seigneurie Blvd., E.
Blainville, Quebec J7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065


877.430.1818
info@dals.com
dals.com

MODEL MSL5G-CC

NAME Pinpoint

5 Light Microspot LED Recessed downlight

Providing contemporary and functional style to any space, the MSL Recessed Series with its glossy piano-black reflector is available in various styles and features.

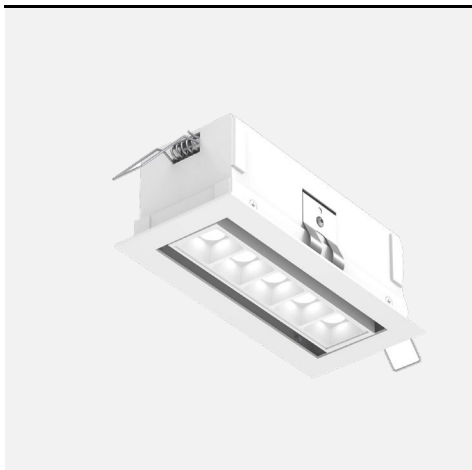


PROJECT

DATE


TYPE

QTY

NOTES

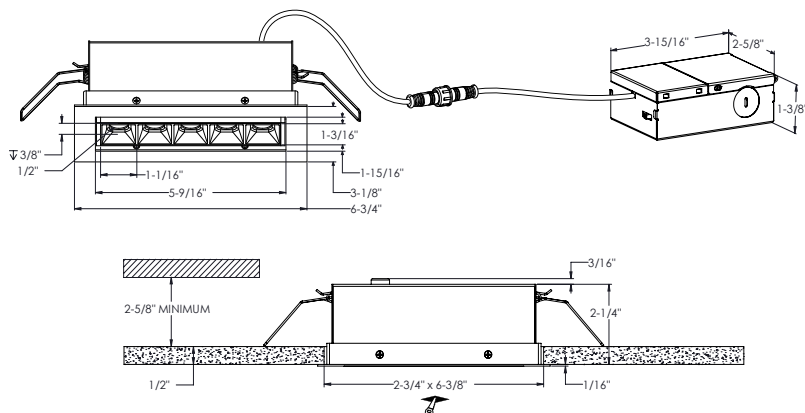

LIGHT DISTRIBUTION

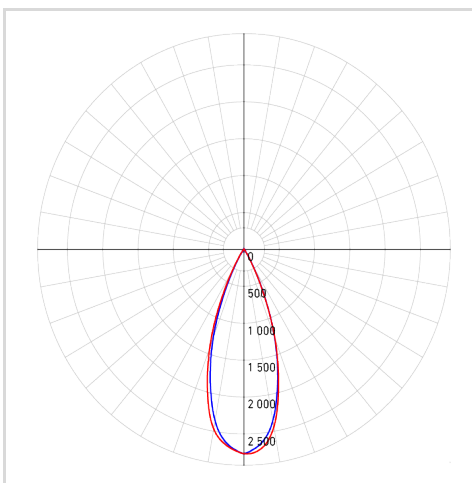

*Lumen output measured at 3000k

QUICK SPECS

Size	7"
Watts (W)	14
Delivered lumens*	800
CRI	90
Voltage (v)	120
Beam angle (deg)	30
Cut hole size (in)	6-3/8 x 2-3/4
Lifespan (hrs)	50000
FT rating	FT6
Binning	3 SDCM
LED model	SMD 3535
Color temperature	2700K/3000K/3500K/4000K/5000K

ELECTRICAL DETAILS

Environment	Dry
Location	Indoor
Operating temp. (° C)	-20 to 40
IP rating	IP44
Input voltage (V)	108-135V
Output voltage (V)	28,4
Output current (mA)	372
Power factor (%)	99
Driver type	Constant current
THD	<30%
Certifications	ETL, FCC, ICES, IC

ORDERING GUIDE

MSL5G-CC

-

Voltage

BLANK - 120v
Triac dimming

V - 120-277-347V
0-10v dimming

Finish

WH - White

BK - Black



CONSTRUCTION

Lens material	PC
Optic type	Clear lens
Finish type	Sandy
Housing material	Aluminum

WHAT'S IN THE BOX	ACCESSORIES	ADAPTORS
LED recessed fixture	RFP-MSL5G	REC-CC-EXT8FT
Junction box	Drilling plate	96" extension cord for recessed fixtures
3x Push-in wire connectors		REC-CC-EXT20FT
Mounting hardware		240" extension cord for recessed fixtures
Instruction sheet		

RECOMMENDED DIMMER LIST*

BRAND	MODEL	DIMMER SPECS	GRADE	MIN	MAX	MAX LOAD
Lutron	DVCL-153PR-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	9	98	11
Lutron	CTCL-153PDH-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	9	97	11
Lutron	STCL-153PH-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	2	97	11
Lutron	MACL-153MRHW-WHC*	Triac, 150 W Dimmable CFL/LED	Compatible	1	97	11
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	11	97	21
Lutron	MA-PRO-WH*	ELV, 250W LED/CFL	Compatible	2	97	18
Lutron	Caseta PD-6WCL-WH-R-C*	Triac, 300W Dimmable CFL/LED	Compatible	1	96	11
Lutron	Caseta PD-5NE-WH-C*	ELV, LED—up to 250 W	Compatible	6	97	18
Lutron	Caseta PD-10NXD-WH*	Triac, LED—up to 250 W	Compatible	1	96	18
Leviton	DSM10-1LZ*	Triac, 450W Dimmable CFL/LED	Compatible	4	97	32
Leviton	PL06-10Z*	Triac, 150 W Dimmable CFL/LED	Compatible	11	96	11
Leviton	DSL06-1LZ*	Triac, 150 W Dimmable CFL/LED	Compatible	10	96	11
Legrand	RHCL453PNICCV4*	Triac, 450W Dimmable CFL/LED	Compatible	11	95	32
Legrand	ADTP703TUM4*	Triac, 450W Dimmable CFL/LED	Compatible	9	96	32
Legrand	RHL373PW*	Triac, 250W LED	Compatible	4	95	18
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	2	96	9
Control 4	C4-FPD120-WH	Triac, 200W LED	Compatible	1	96	14
TP-Link	HS220*	Triac, 150 W, Dimmable LED (MLV)	Compatible	5	95	11

*With Low-End Adjustment Feature
Minimal buzzing noise may occur with some dimmers

WARRANTY
DALs offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DALs customer service call 1-877-430-1818 or send an e-mail to info@dals.com.



DALS LIGHTING

Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065

877.430.1818
info@dals.com
dals.com

MODEL MSL10G-CC

NAME Pinpoint

10 Light Microspot Adjustable Recessed d

Providing contemporary and functional style to any space, the MSL Recessed Series with its glossy piano-black reflector is available in various styles and features.



PROJECT

DATE


TYPE

QTY

NOTES

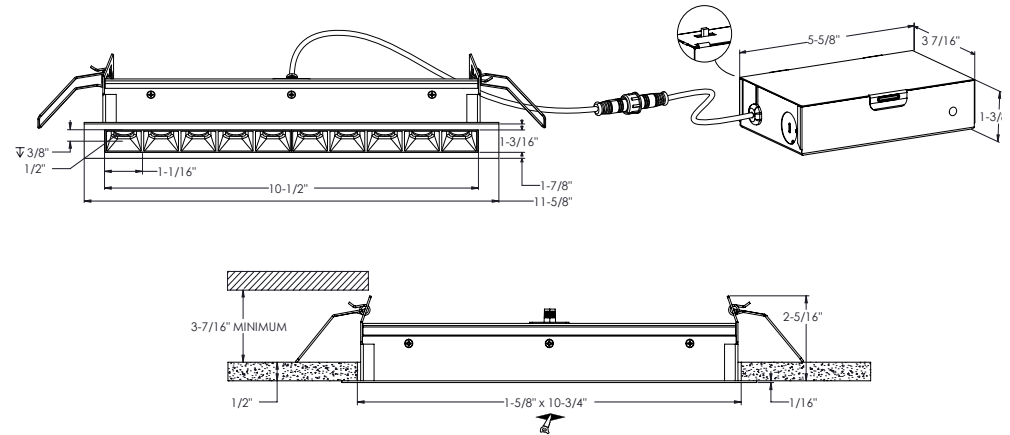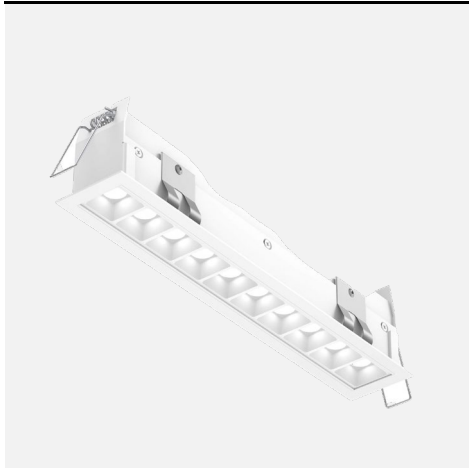

LIGHT DISTRIBUTION

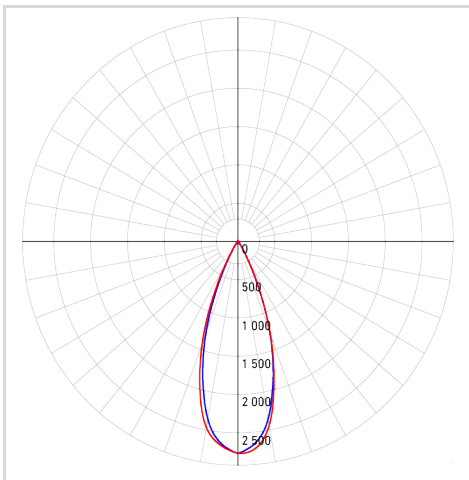

*Lumen output measured at 3000k

QUICK SPECS

Size	13"
Watts (W)	24
Delivered lumens*	1300
CRI	90
Voltage (v)	120
Beam angle (deg)	30
Cut hole size (in)	11-1/2 x 2-3/4
Lifespan (hrs)	50000
FT rating	FT6
Binning	3 SDCM
LED model	SMD 3535
Color temperature	2700K/3000K/3500K/4000K/5000K

ELECTRICAL DETAILS

Environment	Dry
Location	Indoor
Operating temp. (° C)	-20 to 40
IP rating	IP44
Input voltage (V)	108-135V
Output voltage (V)	29
Output current (mA)	667
Power factor (%)	99
Driver type	Constant current
THD	<30%
Certifications	ETL, FCC, ICES,

ORDERING GUIDE

MSL10G-CC	-	Voltage	-	Finish
		BLANK - 120v Triac dimming		WH - White
		V - 120-277-347V 0-10v dimming		BK - Black

CONSTRUCTION

Lens material	PC
Optic type	Clear lens
Finish type	Sandy
Housing material	Aluminum

WHAT'S IN THE BOX

- LED recessed fixture
- Junction box
- 3x Push-in wire connectors
- Mounting hardware
- Instruction sheet

ACCESSORIES

- [RFP-MSL10](#)
- Drilling plate

ADAPTORS

- [REC-CC-EXT8FT](#)
- 96" extension cord for recessed fixtures
- [REC-CC-EXT20FT](#)
- 240" extension cord for recessed fixtures

RECOMMENDED DIMMER LIST*

BRAND	MODEL	DIMMER SPECS	GRADE	MIN	MAX	MAX LOAD
Lutron	DVCL-153PR-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	5	94	6
Lutron	CTCL-153PDH-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	5	93	6
Lutron	STCL-153PH-WH-C*	Triac, 150 W Dimmable CFL/LED	Compatible	2	92	6
Lutron	DVLV-600P-BL	Magnetic Low Voltage, 450W	Compatible	12	92	19
Lutron	MACL-153MRHW-WHC*	Triac, 150 W Dimmable CFL/LED	Compatible	1	91	6
Lutron	MA-PRO-WH*	ELV, 250W LED/CFL	Compatible	2	91	10
Lutron	Caseta PD-5NE-WH-C*	ELV, LED—up to 250 W	Compatible	4	89	10
Lutron	Caseta PD-10NXD-WH*	Triac, LED—up to 250 W	Compatible	1	88	10
Leviton	DSM10-1LZ*	Triac, 450W Dimmable CFL/LED	Compatible	3	92	19
Leviton	DSL06-1LZ*	Triac, 150 W Dimmable CFL/LED	Compatible	6	93	6
Leviton	D26HD-742-1RW*	Triac, 300W LED/CFL	Compatible	8	96	13
Legrand	RHCL453PNICCV4*	Triac, 450W Dimmable CFL/LED	Compatible	7	92	19
Legrand	ADTP703TUM4*	Triac,450W Dimmable CFL/LED	Compatible	6	90	19
Legrand	ADPD453LM2*	Triac,450W Dimmable CFL/LED	Compatible	9	93	19
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0	97	5
Control 4	C4-FPD120-WH	Triac, 200W LED	Compatible	0	97	8
TP-Link	HS220*	Triac, 150 W, Dimmable LED (MLV)	Compatible	4	97	6

*With Low-End Adjustment Feature
Minimal buzzing noise may occur with some dimmers

WARRANTY

DALS offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DAL'S customer service call 1-877-430-1818 or send an e-mail to info@dals.com.