



MODEL **RTJB4-CC**
NAME **ALTER**
4-Inch Recessed Retrofit

Our LED retrofit panels provide the perfect solution for your renovations. There's no need to completely change your current lighting, simply use these innovative products and retrofit your existing installation.

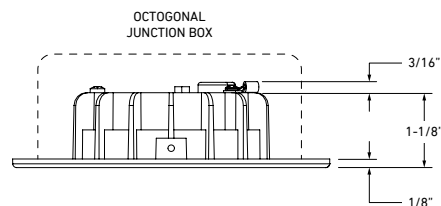

PROJECT:	TYPE:
DATE:	QTY:
NOTES:	

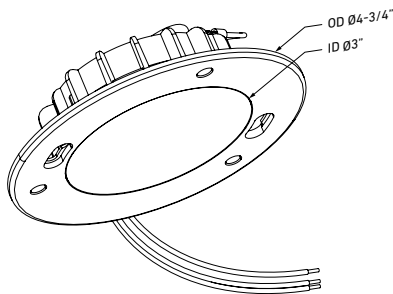


QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	FINISH
4"	9W	565lm	2700K 3000K 3500K 4000K 5000K	90	120V	149°	○ White

*Lumen output measured at 3000K

LIGHT DISTRIBUTION

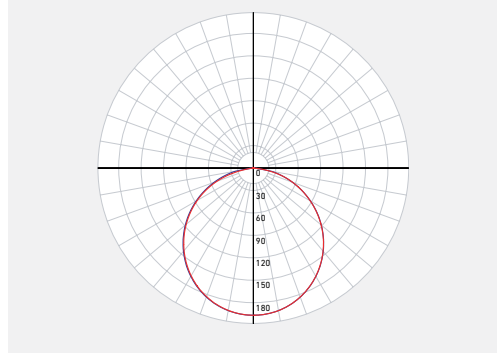

CONSTRUCTION

Lens Frosted	Type of optics Flat lens	Type of LED SMD
Lens material Plastic	Housing material Cast aluminum	Cut hole size 4" or Octo Jbox

RATINGS

Placement Indoor/Outdoor	Lifespan 50,000 hrs.	FT rating -
Location Wet	Certifications ETL, FCC, ICES, ES IC, ASTM E283-04, T24	Operating temperature -20° to 40° C

WHAT'S IN THE BOX

LED recessed fixture
Mounting hardware
Instruction sheet

ACCESSORIES

[RTJB4-ACC](#)
4" Can Kit - Clips and E26 Socket

[RTJB4-TRIM-BK](#)
Recessed Panel Trim

[SM-DIMSW](#)
Smart Dimmer Switch

ADAPTERS

ELECTRICAL DETAILS	Input voltage 108-132V	Output current 520mA	Power factor 90%	Driver type Constant Current
	Output voltage 115V	LED model # 2835	THD harmonic distortion <30%	Binning type 3 SDCM
FEATURES	Integrated driver	Fits into 4" recessed housings (accessories sold separately)	Fire rated alternative when mounted onto a fire rated junction box	Switch-selectable CCT: 2700K/ 3000 K/ 3500 K/ 4000 K/ 5000 K
	Superior LED performance and lifespan	Fits on octagonal junction boxes	Magnetic trim finish	
WARRANTY	DAL S offers a 5-year warranty from the date of purchase which covers repairs or replacement of defective parts of the housing, optics, and electronics. To contact DAL S customer service call 1-877-430-1818 or send an e-mail to info@dals.com .			

RECOMMENDED DIMMER LIST*

BRAND	MODEL #	DIMMER SPECS	GRADE	DIMMING RANGE (%)		MAX LOAD
				MIN	MAX	
Lutron	DVELV-300P-WH	300W electronic low voltage dimmer	Compatible	0	62	33
Lutron	MA-PRO-WH	ELV, 250W LED/CFL	Compatible	0	88	28
Lutron	Caseta PD-10NXD-WH	Triac, LED—up to 250 W	Compatible	0	89	28
Leviton	6672-1LW	Triac, 150W Dimmable CFL/LED	Compatible	0	94	17
Leviton	D26HD-742-1RW	Triac, 300W LED/CFL	Compatible	0	100	33
Legrand	RHCL453PNICCV4	Triac, 450W Dimmable CFL/LED	Compatible	0	99	50
Legrand	ADTP703TUM4	Triac,450W Dimmable CFL/LED	Compatible	0	73	50
Legrand	ADPD453LM2	Triac,450W Dimmable CFL/LED	Compatible	0	100	50
Control 4	C4-APD120-WH	ELV, 120W LED	Compatible	0	100	13

* Minimal buzzing noise may occur with some dimmers



DALS LIGHTING

Canada
80, de la Seigneurie blvd., E.
Blainville, Quebec J7C 4N1

U.S.A.
4383, NW 124th Ave.,
Coral Springs, Florida 33065



877.430.1818
info@dals.com
dals.com

MODEL **RTJB4-3K**
NAME **ALTER**
4-Inch Recessed Retrofit

Our LED retrofit panels provide the perfect solution for your renovations. There's no need to completely change your current lighting, simply use these innovative products and retrofit your existing installation.



PROJECT:	TYPE:
DATE:	QTY:
NOTES:	

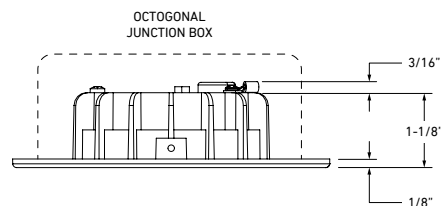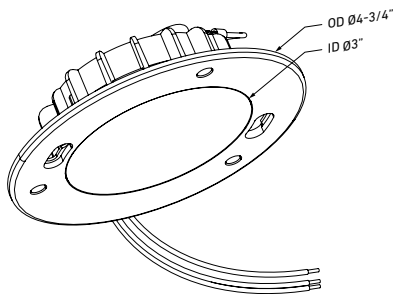


QUICK SPECS

SIZE	WATTS	DELIVERED LUMENS*	COLOR °T 5CCT	CRI	VOLTAGE	BEAM ANGLE	FINISH
4"	9W	550lm	3000K	90	120V	149°	○ White

*Lumen output measured at 3000K

LIGHT DISTRIBUTION



CONSTRUCTION

Lens
Frosted

Type of optics
Flat lens

Type of LED
SMD

Lens material
Acrylic

Housing material
Cast aluminum

Cut hole size
4" or Octo Jbox

RATINGS

Placement
Indoor/Outdoor

Lifespan
50,000 hrs.

FT rating
-

Location
Wet

Certifications
ETL, FCC, ICES, ES
IC, ASTM E283-04, T24

Operating temperature
-20° to 40° C

WHAT'S IN THE BOX

LED recessed fixture
Mounting hardware
Instruction sheet

ACCESSORIES

[RTJB4-ACC](#)
4" Can Kit - Clips and
E26 Socket

[RTJB4-TRIM-BK](#)
Recessed Panel Trim

[SM-DIMSW](#)
Smart Dimmer Switch

ADAPTERS

