




Feed-Through Power Stem

4.6" Round Canopy

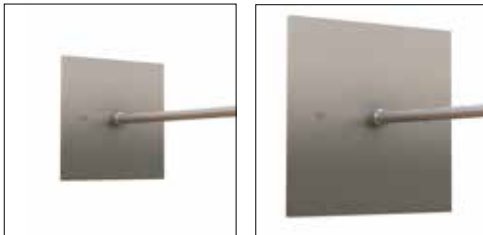

2.8" Square Canopy

4.6" Square Canopy

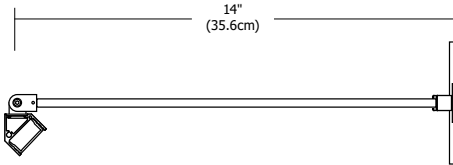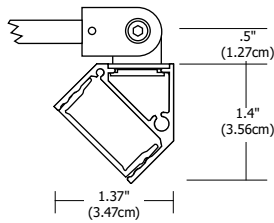

Description:

Angle Display Sign features a lambertian white diffuser that provides uniform light without hotspots. At 7.5 watts per foot, the 24 volt DC channel fixture contains 85+ or 95+CRI LEDs and mounts 14" from wall. It may be ordered with a 4.6" round or square canopy that fits on a standard 4" square electrical box with round plaster ring. It may also be ordered with 2.8" square canopy or a special feed-thru stem for floating signs. Hinges on the fixture arm rotates up to 90 degrees (from facing the wall to straight down). Angle is powered by a Class 2 remote power supply up to 40 feet away. Available from 12 inches to 120 inches/10 feet (Chrome max at 84"). May be ordered in 3, 5, 8 or 10 inch increments. Fixtures include a 5 year warranty.

Finish:

Satin Nickel, Chrome, Antique Bronze, Satin Aluminum, White or Satin Black Custom finishes available

Applications:

Wall wash and retail stores

Lamp:

Version	Watts per Foot	Lumens		85+CRI	95+CRI	50,000 Hour Lamp Life
		per Watt	per Foot			
7WDC	7.5	36	270	●	●	●

Lumen values are based on the 3000K LED test.

24VDC Power Supply (sold separately):

- PSB-25W-010-24VDC** 120VAC input, 25 watt output
- PSB-96W-010-24VDC** 120-277VAC input, 96 watt output
- PSB-2X96W-010-24VDC** 120-277VAC input, 2x96 watt output
- PSB-3X96W-010-24VDC** 120-277VAC input, 3x96 watt output
- PSB-4X96W-010-24VDC** 120-277VAC input, 4x96 watt output
- PS-40W-ELV-24VDC** 120VAC input, 40 watt output
- PSB-60W-ELV-24VDC** 120VAC input, 60 watt output
- PSB-100W-ELV-24VDC** 120VAC input, 96 watt output
- PSB-2X100W-ELV-24VDC** 120VAC input, 2x96 watt output
- PSB-3X100W-ELV-24VDC** 120VAC input, 3x96 watt output
- PSB-4X100W-ELV-24VDC** 120VAC input, 4x96 watt output

Dimming:

010 power supplies use 0-10V dimmer: Philips Sunrise SR1200ZTUNV.
 ELV power supplies use ELV dimmer: Legrand, Adorne ADTP703TU;
 Lutron: Diva DVELV-300P, Skylark SELV-300P, Maestro MAELV-600 and Radio Ra 2

System	Wattage/Voltage	Canopy	Nominal Size	Color Temperature	Finish
AD	7WDC	4RD	120IN	27K	SN
AD Angle Display	7WDC 7.5 Watt 24 Volt DC	2SQ 2.8" Square 4RD 4.6" Round 4SQ 4.6" Square FTP Feed-Through Power Stem	12-120 Order in 12 inch increments up to 120 inches. May be ordered in 3, 5, 8 or 10 inch increments. Chrome Max 84"	24K 2400K Amber White 27K 2700K Very Warm White 30K 3000K Warm White 35K 3500K Neutral White 40K 4000K Cool White 57K 5700K Daylight White	SN Satin Nickel CH Chrome (Max 84") BZ Antique Bronze SA Satin Aluminum BK Satin Black WH White

PROJECT: _____ FIXTURE TYPE: _____ DATE: _____ **EDGE LIGHTING**


ANGLE DISPLAY SIGN 24VDC SYSTEM, 85+ OR 95+CRI

REV.12.15.16

Application: 0-10V dimming for Angle Display Sign

Power Supply: Class 2, 24VDC output: 120VAC input, PSB-25W-010-24VDC;
120-277VAC input, PSB-96W-010-24VDC; PSB-2X96W-010-24VDC

Dimming: Dimmable with 0-10V dimmer using power supplies above: Philips Sunrise SR1200ZTUNV, 0-10V dimmer recommended.

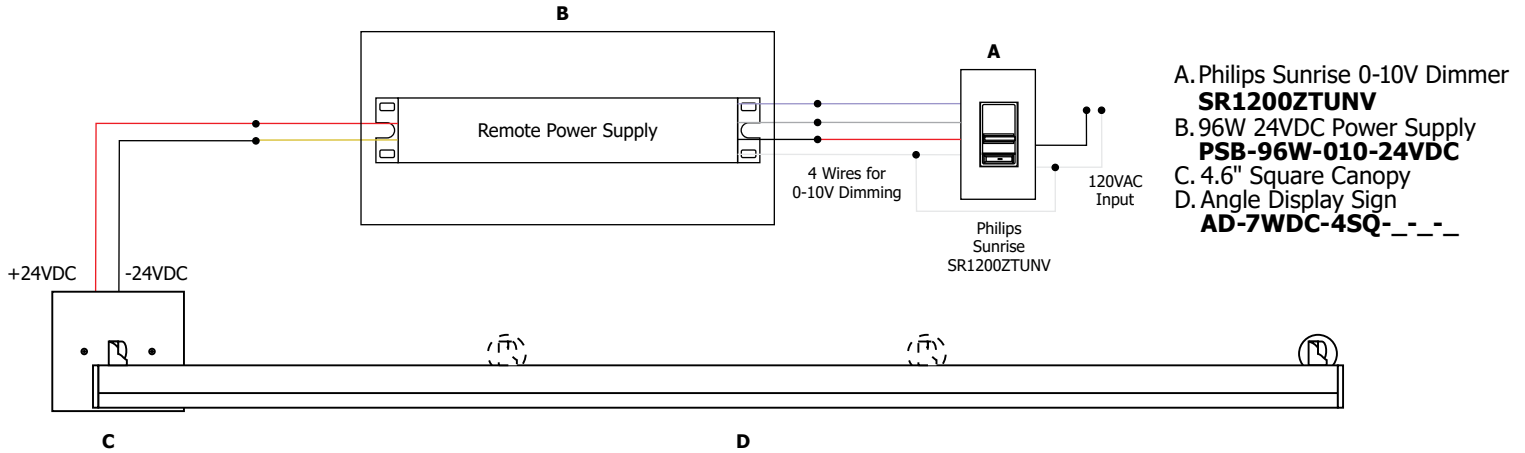

Fixture Mounted 14 inches from wall

	[Diagram of fixture mounted 14 inches from wall]					
1'	91	91	91	91	91	91
2'	52	52	52	52	52	52
3'	28	28	28	28	28	28
4'	22	22	22	22	22	22
5'	14	14	14	14	14	14
6'	11	11	11	11	11	11
7'	9	9	9	9	9	9
8'	5	5	5	5	5	5



Satin Aluminum Anodized



Satin Nickel Anodized



Antique Bronze Anodized



Satin Black Anodized



Chrome Plated



White Powder Coated

PROJECT:


FIXTURE TYPE:

DATE:



ANGLE DISPLAY SIGN 24VDC SYSTEM, 85+ OR 95+CRI

REV.12.15.16

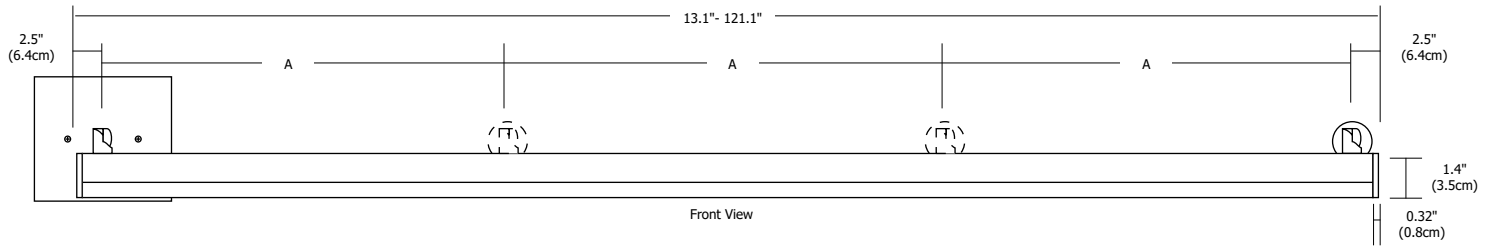

ANGLE DISPLAY SIGN ACTUAL LENGTH

ORDERING CODE (NOMINAL SIZE)	LENGTH (INCHES)	STEM QUANTITY	STEM SPACING (A)
12IN	13.1	2	8.1
15IN	15.5	2	10.5
17IN	17.9	2	12.9
20IN	20.3	2	15.3
22IN	22.7	2	17.7
24IN	25.1	2	20.1
27IN	27.5	2	22.5
29IN	29.9	2	24.9
32IN	32.3	2	27.3
34IN	34.7	2	29.7
36IN	37.1	2	32.1
39IN	39.5	2	34.5
41IN	41.9	2	36.9
44IN	44.3	2	39.3
46IN	46.7	2	41.7
48IN	49.1	2	44.1
51IN	51.5	3	23.25
53IN	53.9	3	24.45
56IN	56.3	3	25.65
58IN	58.7	3	26.85
60IN	61.1	3	28.05
63IN	63.5	3	29.25
65IN	65.9	3	30.45

ORDERING CODE (NOMINAL SIZE)	LENGTH (INCHES)	STEM QUANTITY	STEM SPACING (A)
68IN	68.3	3	31.65
70IN	70.7	3	32.85
72IN	73.1	3	34.05
75IN	75.5	3	35.25
77IN	77.9	3	36.45
80IN	80.3	3	37.65
82IN	82.7	3	38.85
84IN	85.1	3	40.05
87IN	87.5	3	41.25
89IN	89.9	3	42.45
92IN	92.3	3	43.65
94IN	94.7	3	44.85
96IN	97.1	3	46.05
99IN	99.5	4	31.5
101IN	101.9	4	32.3
104IN	104.3	4	33.1
106IN	106.7	4	33.9
108IN	109.1	4	34.7
111IN	111.5	4	35.5
113IN	113.9	4	36.3
116IN	116.3	4	37.1
118IN	118.7	4	37.9
120IN	121.1	4	38.7

PROJECT:

FIXTURE
TYPE:

DATE:

