


LED BUBBLE BALL 14 LIGHT, LINEAR CANOPY

REV.04.06.17



Compatible System Connectors

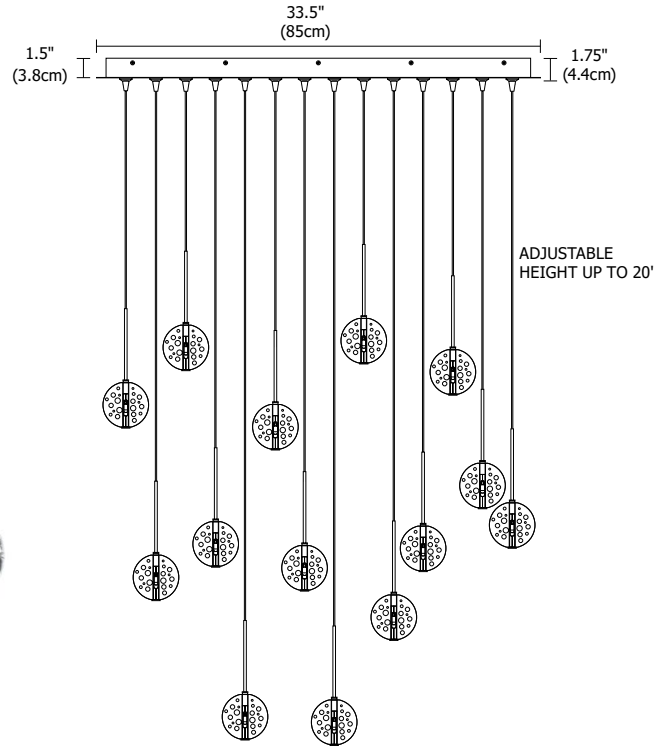

Description

The 14-Port, 33 inch Rectangle Fast Jack Canopy mounts to a standard 4 inch electrical box with plaster ring, or to an octagon box. It includes 4 drywall anchors for additional support. Dimmable with standard electronic low voltage dimmer. General light distribution. LED Bubble Ball pendants suspend from fourteen individual canopy ports; each ball features bubble glass with a 1.5 watt, 2700K LED lamp. LED Bubble Ball 14 is available with 10, 20 or 30 feet long field-cuttable coaxial cable and includes (14) FJ-MCH (male connector heavy-duty). Order fixture based on longest desired cable length. LED Bubble Ball 14 provides maintenance free illumination with a 50,000 hour lamp life.

Finish

Satin Nickel

Lamp Specification (per port)

1.5 Watt, 2700K LED, 80 CRI (equivalent to 10-15 watt halogen)

Weight

65 lb (29.5kg)



Blue

Amber

Red

Canopy	Port	Shade Type	Cable Length	Finish	Voltage
33RE	14	BBCL27	10FT	SN	Standard 120V (leave blank)
33RE 11"x33" Rectangle	14 14 Port	BBCL27 Bubble Ball Clear LED 2700K BBBL27 Bubble Ball Blue LED 2700K BBAL27 Bubble Ball Amber LED 2700K BBRL27 Bubble Ball Red LED 2700K	10FT 10 feet 20FT 20 feet 30FT 30 feet	SN Satin Nickel	2 230V 50Hz 3 277V 60Hz

PROJECT:

FIXTURE TYPE:

DATE:

